

Session Border Controllers (SBC)

AudioCodes Mediant™ Series

Interoperability Lab

Configuration Note

BT Italia SIP Trunk & Genesys Contact Center using AudioCodes Mediant SBC



Version 7.0

March 2016

Document # LTRT-126102



Table of Contents

1	Introduction	9
1.1	Intended Audience	9
1.2	About AudioCodes SBC Product Series	9
1.3	About Genesys Contact Center	9
2	Component Information.....	11
2.1	AudioCodes SBC Version.....	11
2.2	BT Italia SIP Trunking Version.....	11
2.3	Genesys Contact Center Version	11
2.4	Interoperability Test Topology	12
2.4.1	Environment Setup	14
2.4.2	Known Limitations/Restrictions/Notes	14
3	Configuring AudioCodes SBC	19
3.1	Step 1: Configure IP Network Interfaces.....	20
3.1.1	Step 1a: Configure VLANs.....	21
3.1.2	Step 1b: Configure Network Interfaces.....	21
3.2	Step 2: Enable the SBC Application	23
3.3	Step 3: Configure Signaling Routing Domains.....	24
3.3.1	Step 3a: Configure Media Realms.....	24
3.3.2	Step 3b: Configure SIP Signaling Interfaces	26
3.4	Step 4: Configure Proxy Sets	27
3.5	Step 5: Configure IP Groups.....	30
3.6	Step 6: Configure IP Profiles	35
3.7	Step 7: Configure Coders	40
3.8	Step 8: Configure IP-to-IP Call Routing Rules	41
3.9	Step 9: Configure IP-to-IP Manipulation Rules.....	50
3.10	Step 10: Perform SIP Header Message Manipulations	54
3.11	Step 11: Configure Remote Agents	56
3.11.1	Step 11a: Configure Media Realm for a Remote Agent.....	56
3.11.2	Step 11b: Configure SIP Signaling Interfaces for Remote Agents	57
3.11.3	Step 11c: Configure Remote (User) Agents IP Group	58
3.11.4	Step 11d: Configure IP Profiles for Remote Agents	60
3.11.5	Step 11e: Configure Classification Table for Remote Agents	61
3.11.6	Step 11f: Configure IP-to-IP Call Routing Rules for Remote (User) Agent.....	64
3.12	Step 12: Reset the SBC	70
A	AudioCodes <i>ini</i> File.....	71

List of Figures

Figure 2-1: Interoperability Test Topology.....	13
Figure 3-1: Network Interfaces in Interoperability Test Topology.....	20
Figure 3-2: Configured VLAN IDs in Ethernet Device Table.....	21
Figure 3-3: Configured Network Interfaces in IP Interfaces Table	22
Figure 3-4: Enabling SBC Application	23
Figure 3-5: SRD Table.....	24
Figure 3-6: Configure Media Realm for LAN.....	25
Figure 3-7: Configure Media Realm for WAN.....	25
Figure 3-8: Configured Media Realms in Media Realm Table	26
Figure 3-9: Configured SIP Interfaces in SIP Interface Table	26
Figure 3-10: Configure Proxy Set for Genesys Contact Center SIP Server	27
Figure 3-11: Proxy Address Table - Add Row.....	28
Figure 3-12: Configure Proxy Set for ITSP SIP Trunk	29
Figure 3-13: Configure Proxy Set for ITSP SIP Trunk – Add Row.....	29
Figure 3-14: Configure an IP Group for the Genesys Call Center (Common Tab)	31
Figure 3-15: Configure an IP Group for the Genesys Call Center (SBC Tab)	31
Figure 3-16: Configure an IP Group for the ITSP SIP Trunk (Common Tab)	33
Figure 3-17: Configure an IP Group for the ITSP SIP Trunk (SBC Tab)	33
Figure 3-18: Configured IP Groups in IP Group Table	34
Figure 3-19: Configure IP Profile for Genesys Contact Center (Common Tab).....	36
Figure 3-20: Configure IP Profile for Genesys Contact Center (SBC Tab).....	36
Figure 3-21: Configure IP Profile for ITSP SIP Trunk (Common Tab)	37
Figure 3-22: Configure IP Profile for ITSP SIP Trunk – SBC Tab.....	38
Figure 3-23: Configure IP Profile for ITSP SIP Trunk – SBC Tab.....	39
Figure 3-24: Configured IP Profiles in IP Profile Table	39
Figure 3-25: Configure an Allowed Coders Group	40
Figure 3-26: Configure IP-to-IP Routing Rule for Terminating SIP OPTIONS - Rule Tab.....	42
Figure 3-27: Configure IP-to-IP Routing Rule for Terminating SIP OPTIONS - Action Tab	43
Figure 3-28: Configure IP-to-IP Routing Rule for Genesys to ITSP – Rule tab	44
Figure 3-29: Configure IP-to-IP Routing Rule for Genesys to ITSP – Action tab.....	45
Figure 3-30: Configure IP-to-IP Routing Trigger Rule for 3xx/REFER to local agents – Rule tab.....	46
Figure 3-31: Configure IP-to-IP Routing Rule for Trigger Rule for 3xx/REFER to local agents – Action Tab.....	47
Figure 3-32: Configure IP-to-IP Routing Rule for ITSP to Genesys – Rule tab	48
Figure 3-33: Configure IP-to-IP Routing Rule for ITSP to Genesys – Action tab.....	49
Figure 3-34: Configured IP-to-IP Routing Rules in IP-to-IP Routing Table	49
Figure 3-35: Configure IP-to-IP Inbound Manipulation Rule – Rule Tab	51
Figure 3-36: Configure IP-to-IP Inbound Manipulation Rule – Rule Tab	52
Figure 3-37: Configure IP-to-IP Inbound Manipulation Rule - Action Tab.....	53
Figure 3-38: Example of Configured IP-to-IP Inbound Manipulation Rules	53
Figure 3-39: Configure a Remote Agent Media Realm	56
Figure 3-40: Configure a Remote Agent Media Realm	56
Figure 3-41: Configured SIP Interfaces for Remote Agents in SIP Interface Table.....	57
Figure 3-42: Configure an IP Group for the Remote (User) Agents (Common Tab)	58
Figure 3-43: Configure an IP Group for Remote User Agents (SBC Tab)	59
Figure 3-44: Configured IP Group for Remote Users in IP Group Table	59
Figure 3-45: Configure IP Profile for Remote Users (Common Tab)	60
Figure 3-46: Configured IP Profiles in IP Profile Table	61
Figure 3-47: Configure Rule Tab of the Classification Table	62
Figure 3-48: Configured IP Profiles in IP Profile Table	63
Figure 3-49: Configured Classification Rule for Remote (Users) Agents.....	63
Figure 3-50: Configure IP-to-IP Routing Rule for Terminating RemoteAgents2Genesys – Rule Tab	65
Figure 3-51: Configure IP-to-IP Routing Rule for Terminating RemoteAgents2Genesys – Action Tab	66
Figure 3-52: Configure IP-to-IP Routing Rule for Genesys to Remote Agent Group – Rule tab	67
Figure 3-53: Configure IP-to-IP Routing Rule for Genesys to SIP Trunk – Action tab	68
Figure 3-54: Configured IP-to-IP Routing Rules in IP-to-IP Routing Table.....	69
Figure 3-55: Resetting the SBC	70

List of Tables

Table 2-1: AudioCodes SBC Version	11
Table 2-2: BT Italia Version	11
Table 2-3: Genesys Contact Center Version.....	11
Table 2-4: Environment Setup.....	14

This page is intentionally left blank

Notice

This document describes how to connect the BT Italia ITSP SIP Trunk and Genesys Contact Center using AudioCodes Mediant SBC product series.

Information contained in this document is believed to be accurate and reliable at the time of printing. However, due to ongoing product improvements and revisions, AudioCodes cannot guarantee accuracy of printed material after the Date Published, nor can it accept responsibility for errors or omissions. Updates to this document and other documents as well as software files can be viewed by registered customers at <http://www.audiocodes.com/downloads>.

© Copyright 2016 AudioCodes Ltd. All rights reserved.

This document is subject to change without notice.

Date Published: Mar-09-2016

Trademarks

AudioCodes, AC, HD VoIP, HD VoIP Sounds Better, IPmedia, Mediant, MediaPack, What's Inside Matters, OSN, SmartTAP, VMAS, VoIPerfect, VoIPerfectHD, Your Gateway To VoIP, 3GX, VocaNOM and CloudBond 365 are trademarks or registered trademarks of AudioCodes Limited. All other products or trademarks are property of their respective owners. Product specifications are subject to change without notice.

WEEE EU Directive

Pursuant to the WEEE EU Directive, electronic and electrical waste must not be disposed of with unsorted waste. Please contact your local recycling authority for disposal of this product.

Customer Support

Customer technical support and services are provided by AudioCodes or by an authorized AudioCodes Service Partner. For more information on how to buy technical support for AudioCodes products and for contact information, please visit our Web site at www.audiocodes.com/support.

Documentation Feedback

AudioCodes continually strives to produce high quality documentation. If you have any comments (suggestions or errors) regarding this document, please fill out the Documentation Feedback form on our Web site at <http://www.audiocodes.com/downloads>.

This page is intentionally left blank

1 Introduction

This document describes how to configure AudioCodes' Session Border Controller (hereafter referred to as SBC) for interworking between the BT Italia ITSP SIP Trunk and Genesys Contact Center.



Note: Throughout this document, the term 'SBC' also refers to AudioCodes' Mediant SBC product series.

1.1 Intended Audience

The document is intended for engineers, or AudioCodes and Genesys Contact Center Partners who are responsible for installing and configuring the BT Italia ITSP SIP Trunk and Genesys Contact Center for enabling VoIP calls using AudioCodes' SBC.

1.2 About AudioCodes SBC Product Series

AudioCodes' family of SBC devices enables reliable connectivity and security between the enterprise and the Service Provider's VoIP networks.

The SBC provides perimeter defense as a way of protecting enterprises from malicious VoIP attacks; mediation for allowing the connection of any PBX and/or IP PBX to any Service Provider; and Service Assurance for service quality and manageability.

Designed as a cost-effective appliance, the SBC is based on field-proven VoIP and network services with a native host processor, allowing the creation of purpose-built multiservice appliances, providing smooth connectivity to cloud services, with integrated quality of service, SLA monitoring, security and manageability.

The native implementation of SBC provides a host of additional capabilities that are not possible with standalone SBC appliances such as VoIP mediation, PSTN access survivability, and third-party value-added services applications. This enables enterprises to utilize the advantages of converged networks and eliminate the need for standalone appliances.

AudioCodes' SBC is available as an integrated solution running on top of its field-proven Mediant Media Gateway and Multi-Service Business Router (MSBR) platforms, or as a software-only solution for deployment with third-party hardware.

1.3 About Genesys Contact Center

Genesys Contact Center Solutions allow companies to manage customer requirements effectively by routing customers to appropriate resources and agents through IVR and consolidated cross-channel management of all of a customer's interactions. Sophisticated profiling, outbound voice and performance management enables companies to provide very personalized customer care and delivery.

This page is intentionally left blank.

2 Component Information

2.1 AudioCodes SBC Version

Table 2-1: AudioCodes SBC Version

SBC Vendor	AudioCodes
Models	<ul style="list-style-type: none"> ▪ Mediant 500 E-SBC ▪ Mediant 800 Gateway & E-SBC ▪ Mediant 1000B Gateway & E-SBC ▪ Mediant 2600 E-SBC ▪ Mediant 3000 Gateway & E-SBC ▪ Mediant 4000 SBC ▪ Mediant 9000 SBC ▪ Mediant Software SBC (Server Edition and Virtual Edition)
Software Version	SIP_7.00A.049.003
Protocol	<ul style="list-style-type: none"> ▪ SIP/UDP (to the BT Italia ITSP SIP Trunk) ▪ SIP/UDP (to the Genesys Contact Center system)
Additional Notes	None

2.2 BT Italia SIP Trunking Version

Table 2-2: BT Italia Version

Vendor/Service Provider	BT Italia
SSW Model/Service	Unknown
Software Version	Unknown
Protocol	SIP
Additional Notes	None

2.3 Genesys Contact Center Version

Table 2-3: Genesys Contact Center Version

Vendor	Genesys
Software Version	Genesys SIP Server v8.1.101.68/Genesys Voice Platform (GVP) v8.5
Protocol	SIP
Additional Notes	None

2.4 Interoperability Test Topology

The Genesys Contact Center SIP Server is connected to the BT Italia ITSP SIP Trunk Provider via an SBC in a similar way to an IP-PBX.




Note: Contact your Genesys Contact Center support channel for more information about topological scenarios.

Interoperability testing between AudioCodes SBC and BT Italia ITSP SIP Trunk with Genesys Contact Center 8.1 was performed using the following topology:

- The enterprise was deployed with a Genesys Contact Center as a service using robust Contact Center functionality and interactive voice response (IVR) to efficiently connect customers with the right agents and information at the right time.
- The enterprise SBC connected the Genesys Contact Center with the Public PSTN via the BT Italia ITSP SIP Trunk, as an Over the Top (OTT) trunk over the public network.
- AudioCodes' SBC was deployed to interconnect between the enterprise's LAN and the SIP trunk.
 - The SBC was connected to the Genesys Contact Center SIP server on the Genesys Contact Center internal network, and to the BT Italia ITSP SIP Trunk located on the public network.
 - RTP traffic from/to the BT Italia ITSP SIP trunk flowed via an SBC to/from Genesys Contact Center Media Server, or to a local agent phone on the Call Center network, or to a Remote Agent on the PSTN network or public Internet space.

The figure below illustrates the interoperability test topology:

Figure 2-1: Interoperability Test Topology

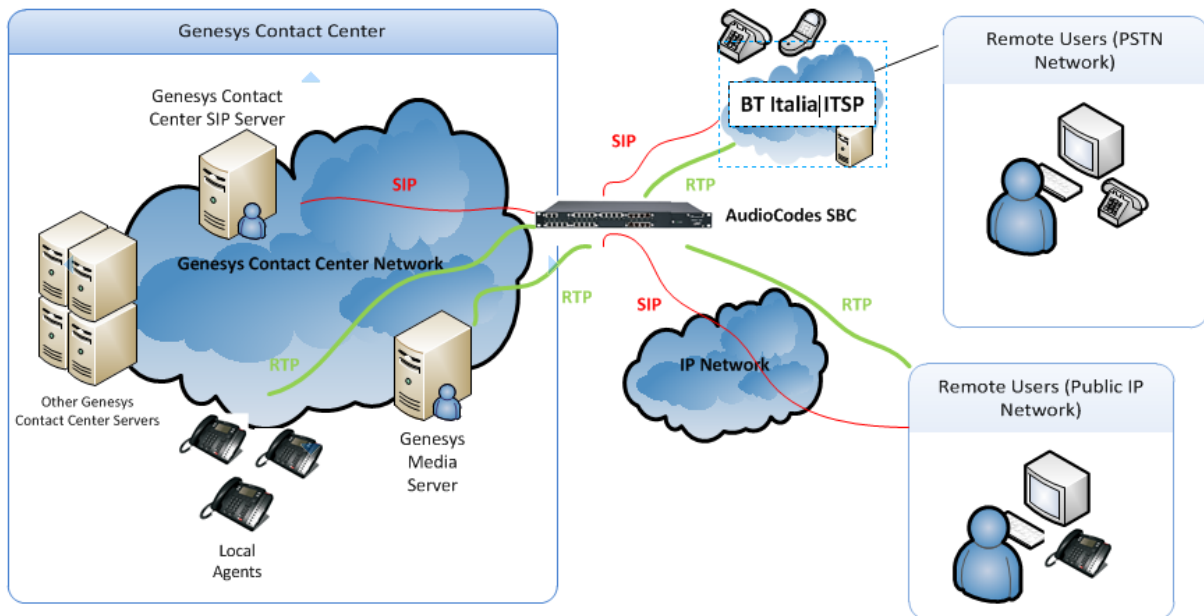

2.4.1 Environment Setup

The interoperability test topology includes the following environment setup:

Table 2-4: Environment Setup

Area	Setup
Network	<ul style="list-style-type: none"> Genesys Contact Center environment as a service is located on the Genesys Contact Center network Genesys Contact Center agent SIP phones are located on the enterprise's LAN. Remote Agent directory numbers (DNs) exist in the public network BT Italia ITSP SIP Trunk is located on the WAN
Signaling Transcoding	<ul style="list-style-type: none"> Genesys Contact Center operates with SIP-over-UDP, TCP or TLS transport type BT Italia SIP Trunk operates with SIP-over-UDP transport type. The interoperability test environment used SIP-over-UDP
Codecs Transcoding	<ul style="list-style-type: none"> Genesys Contact Center is capable of supporting G.729, G.711A-law, G.711U-law, G.723, G722.2 and G.726 coders BT Italia SIP Trunk supports G.729 (preferred) and G.711 A-law (recommended) coders
Media Transcoding	<ul style="list-style-type: none"> Genesys Contact Center and BT Italia SIP Trunk operate with RTP media Type
DTMF	<ul style="list-style-type: none"> Genesys Contact Center supports delivering DTMF using SIP INFO message, RFC 2833 Named Telephony events, and in-band per ITU-T Recommendation Q.23 BT Italia supports RFC 2833




Note: The configuration data used in this document, such as IP addresses and FQDNs are used for example purposes only. This data should be configured according to the site specifications.

2.4.2 Known Limitations/Restrictions/Notes

The following Genesys Call Center functionality is not supported by BT Italia SIP Trunk:

- **SIP 302 Moved Temporarily:** BT Italia does not support SIP 302 Moved Temporarily. This should be handled locally by the SBC.
- **SIP REFER:** The BT Italia does not support SIP REFER operation. This should be handled locally by the SBC.
- **P-Asserted-Identity:** BT Italia requires P-Asserted-Identity header to be included in initial SIP INVITE. The SIP URI user part in the PAI must contain the e.164 number of the calling party, which must be one of the numbers assigned by BT Italia. This can be implemented by Genesys contact center, or it can be handled by the SBC.

If considering implementing Genesys contact center implementation, this can be defined in the Genesys DN object (Annex -> TServer section) for each extension, as indicated by the following example using CME.

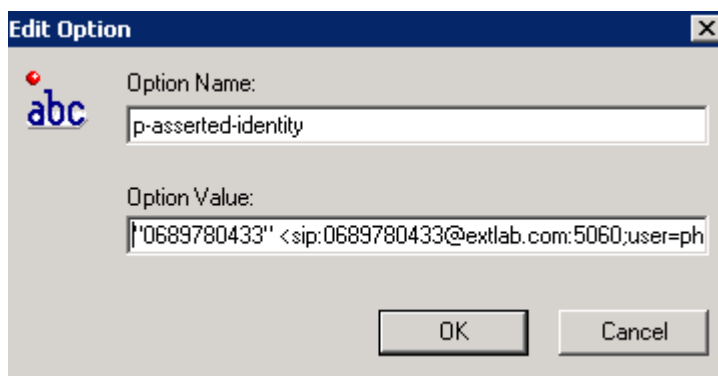

Edit Option


Option Name: p-asserted-identity

Option Value: "0689780433" <sip:0689780433@extlab.com:5060;user=ph

OK Cancel

- **SIP Authentication for Outbound Calls:** BT Italia does not support the use of SIP Digest (challenging the SIP User Agent on receiving a SIP Request from the Contact Center). If SIP authentication for outbound calls (from the Contact Center) is required, the SIP authentication challenge can be handled on the SBC as part of the Trunk-Side Equipment (TSE).

If considering implementation in Genesys contact center, this can be defined in the Options -> AuthClient section of the outgoing trunk, as indicated by the following example using CME. Note if SIP Authentication is not required then both options would not be defined.

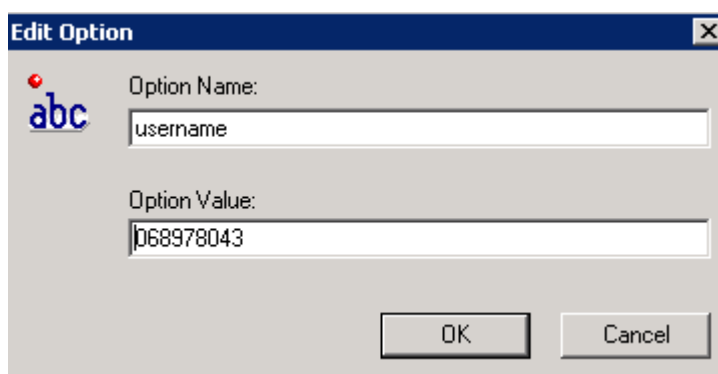


Edit Option

Option Name: username

Option Value: 068978043

OK Cancel

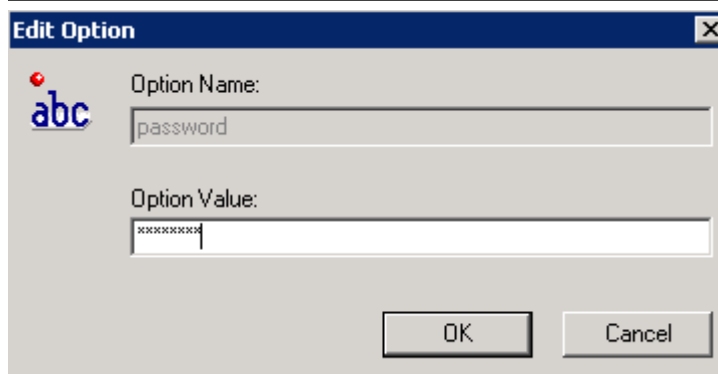

Edit Option

Option Name: password

Option Value: xxxxxxxx


OK Cancel

- **SBCMAXFORWARDSLIMIT:** For the interoperability test, this parameter was set to the SBC default setting of 10. Consider adjusting this parameter corresponding to deployment requirements. (**Configuration > VoIP > SBC > SBC General Settings**)
- **G.729 Annex B codec support:** BT Italia does not support the use of G.729 Annex B. Presented SDP must include media attribute 'annexb=no' for G.729.

Note that the Genesys Voice Platform (GVP) does not observe the negotiation of G.729 Annex B. When RTP packets are sent, Annex B packets are never sent, whether or not the Annex B option is negotiated. When RTP packets are received, GVP interprets the packet and can interoperate with the codec, whether it is an Annex B packet or not. However, when it is being negotiated, GVP will not advertise that Annex B is supported.


- **G.729 codec support:** BT Italia wants all SDP exchanges to have G.729 listed as the preferred codec, including any SIP reINVITE. To accomplish this, Genesys SIP Server and Genesys Voice Platform should be modified to ensure that G.729 codec is listed as the preferred codec.

When considering Genesys SIP Server, this can be defined in Options -> TServer section as indicated by the following example using CME.

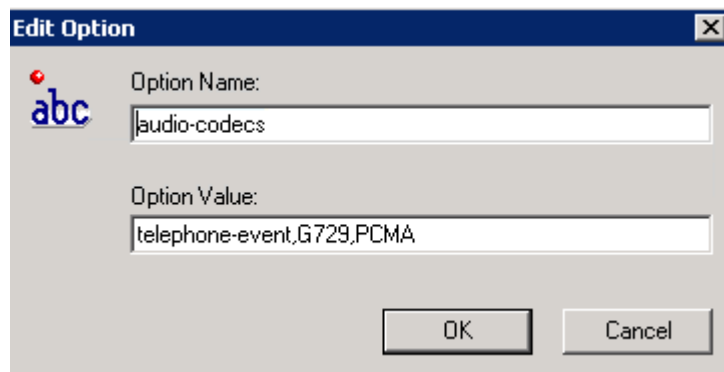


The screenshot shows a dialog box titled "Edit Option" with a close button (X) in the top right corner. On the left side, there is a logo with the letters "abc" and a red dot above it. The dialog contains two text input fields. The first field is labeled "Option Name:" and contains the text "audio-codecs". The second field is labeled "Option Value:" and contains the text "telephone-event,G729,PCMA". At the bottom right, there are two buttons: "OK" and "Cancel".

As a reminder, the definition of the payload type used for telephone-event is made in Options -> TServer section as indicated by the following example using CME.

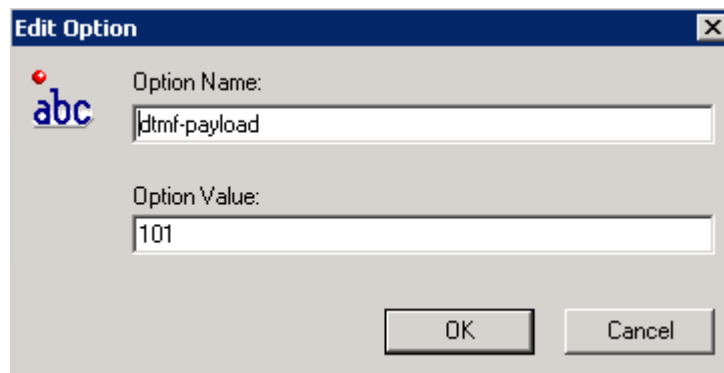


The screenshot shows a dialog box titled "Edit Option" with a close button (X) in the top right corner. On the left side, there is a logo with the letters "abc" and a red dot above it. The dialog contains two text input fields. The first field is labeled "Option Name:" and contains the text "dtmf-payload". The second field is labeled "Option Value:" and contains the text "101". At the bottom right, there are two buttons: "OK" and "Cancel".

When considering the Genesys Voice Platform, this can be defined in Options -> mpc section as indicated by the following example using CME.

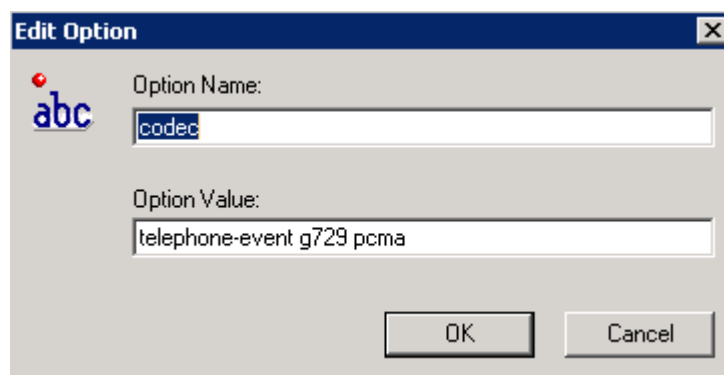


The screenshot shows a dialog box titled "Edit Option" with a close button (X) in the top right corner. On the left side, there is a logo with the letters "abc" and a red dot above it. The dialog contains two text input fields. The first field is labeled "Option Name:" and contains the text "codec". The second field is labeled "Option Value:" and contains the text "telephone-event g729 pcma". At the bottom right, there are two buttons: "OK" and "Cancel".

As a reminder, the definition of the payload type used for telephone-event is made in Options -> mpc section as indicated by the following example using CME.

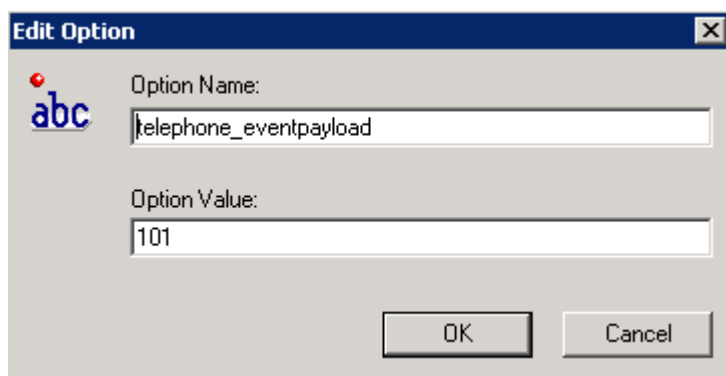

Edit Option

 Option Name:

Option Value:

OK Cancel

3 Configuring AudioCodes SBC

This section shows how to configure AudioCodes SBC for interworking between Genesys Contact Center and the BT Italia ITSP SIP Trunk. The configuration is based on the interoperability test topology described in Section 2.4 on page 12 and includes the following:

- **SBC WAN interface** - BT Italia ITSP SIP Trunking environment
- **SBC LAN interface** - Genesys Contact Center environment

Configuration is performed using the SBC's embedded Web server (referred to as *Web interface* in this document).


Note:

- To implement the Genesys Contact Center and BT Italia ITSP SIP Trunk based on the configuration described in this section, the SBC must be installed with a Software License Key that includes the following software features:

- ✓ SBC
- ✓ Security
- ✓ RTP
- ✓ SIP

For more information about the Software License Key, contact your AudioCodes Sales Representative.

- The scope of this interoperability test and document does not cover all security aspects of connecting the SIP Trunk to the Genesys Contact Center environment. Comprehensive security measures should be implemented per the enterprise's security policies. For security recommendations on AudioCodes' products, refer to the *Recommended Security Guidelines* document.
- The tables in this document were copied from the configured interoperability laboratory system and are listed in the order necessary to route correctly. If the configuration was built with sequential indices, it may be necessary to use the **Up** and **Down** buttons to correctly order the rows. The Genesys2RemoteAgents row has been moved up in the table so the more specific condition is evaluated for routing before the more general conditions.
- Before you begin configuring the SBC, ensure that the SBC's Web interface navigation tree is in **Advanced** display mode, selectable as shown below:

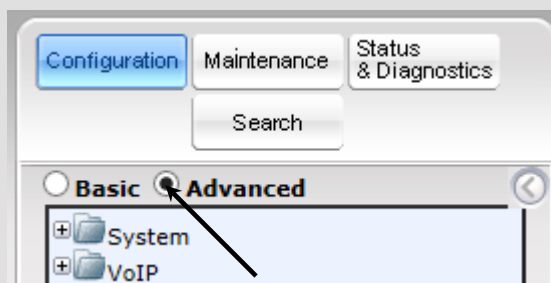


Note that when the SBC is reset, the navigation tree reverts to **Basic** display mode.

3.1 Step 1: Configure IP Network Interfaces

This step describes how to configure the SBC's IP network interfaces. A number of methods can be used to deploy the SBC; the interoperability test topology uses the following method:

- SBC interfaces with these IP entities:
 - Genesys Contact Center, located on the Genesys Contact Center Service Provider network (LAN)
 - BT Italia ITSP SIP Trunk, located on the WAN
- SBC connects to the WAN through a DMZ network.
- Physical connection to the LAN: Type depends on the method used to connect to the Genesys Contact Center Service Provider's network. In the interoperability test topology, the SBC connects to the LAN and WAN using dedicated LAN ports (i.e., using two ports and two network cables).
- SBC also uses two logical network interfaces:
 - LAN (VLAN ID 1)
 - WAN (VLAN ID 2)

Figure 3-1: Network Interfaces in Interoperability Test Topology

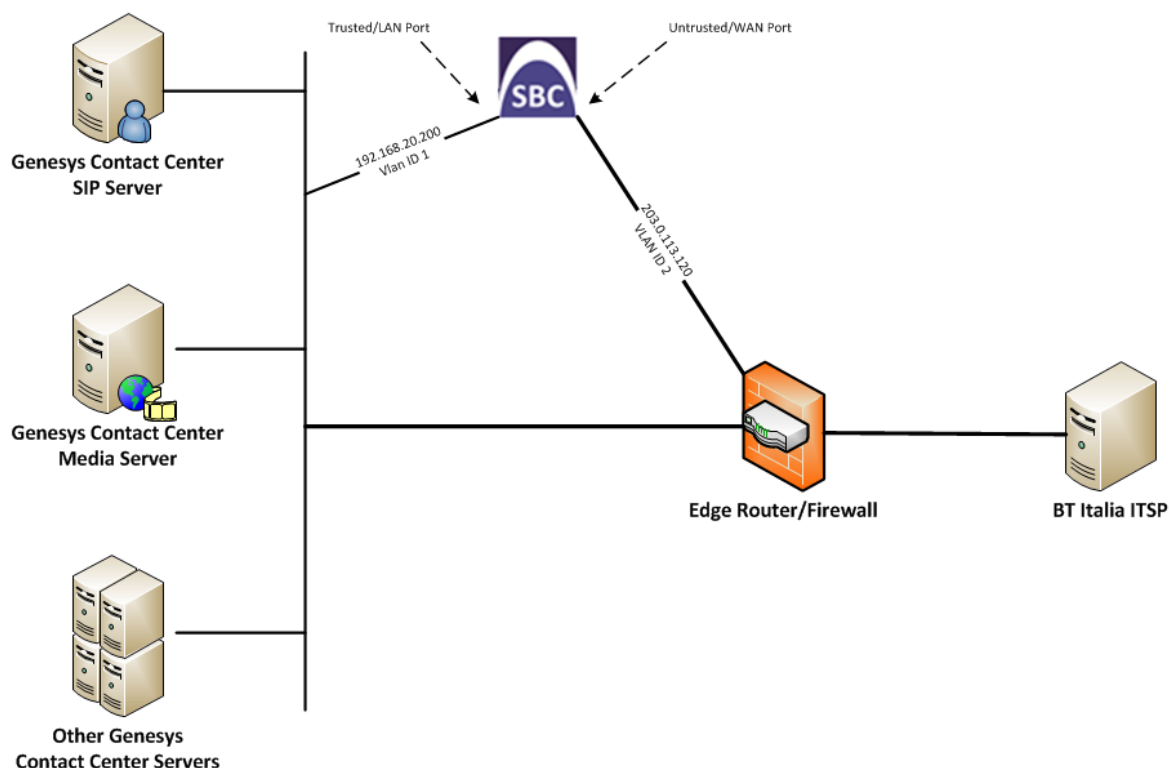

3.1.1 Step 1a: Configure VLANs

This step describes how to define VLANs for each of the following interfaces:

- LAN VoIP (assigned the name "Call Center")
- WAN VoIP (assigned the name "Provider")

➤ **To configure the VLANs:**

1. Open the Ethernet Device Table page (**Configuration** tab > **VoIP** menu > **Network** > **Ethernet Device Table**); in the table you'll see an existing row for VLAN ID 1 and underlying interface GROUP_1.
2. Add another VLAN ID 2 for the WAN side as follows:

Parameter	Value
Index	1
VLAN ID	2
Underlying Interface	GROUP_2 (Ethernet port group)
Name	GROUP_2
Tagging	Untagged

Figure 3-2: Configured VLAN IDs in Ethernet Device Table

The screenshot shows the 'Ethernet Device Table' interface. At the top, there are buttons for 'Add +', 'Edit', 'Delete', and 'Show / Hide'. Below these is a search bar with a dropdown menu set to 'All' and a 'Search' button. The table itself has five columns: 'Index', 'VLAN ID', 'Underlying Interface', 'Name', and 'Tagging'. There are two rows of data:

Index	VLAN ID	Underlying Interface	Name	Tagging
0	1	GROUP_1	GROUP_1	Untagged
1	2	GROUP_2	GROUP_2	Untagged

3.1.2 Step 1b: Configure Network Interfaces

This step describes how to configure the following interfaces:

- **LAN VoIP interface** (assigned the name "Trusted")
- and
- **WAN VoIP interface** (assigned the name "Untrusted")

➤ **To configure these IP network interfaces:**

1. Open the IP Interfaces Table page (**Configuration** tab > **VoIP** menu > **Network** > **IP Interfaces Table**).

2. Modify the existing LAN network interface:
 - a. Select the **Index** option of the **OAMP + Media + Control** table row, and then click **Edit**.
 - b. Configure the interface as follows:

Parameter	Value
IP Address	192.168.20.200 (IP address of SBC)
Prefix Length	24 (subnet mask in bits for 255.255.255.0)
Gateway	192.168.20.1
Interface Name	NETMGT (arbitrary descriptive name)
Primary DNS Server IP Address	Add DNS Server IP address in this network
Underlying Device	GROUP_1


3. Add a network interface for the WAN side:
 - a. Enter **1**, and then click **Add Index**.
 - a. Configure the interface as follows:

Parameter	Value
Application Type	Media + Control
IP Address	203.0.113.120 (WAN IP address)
Prefix Length	26 (for 255.255.255.128)
Gateway	203.0.113.65 (router's IP address)
Interface Name	PUBSIP (arbitrary descriptive name)
Primary DNS Server IP Address	8.8.4.4 (or as specified by ISP)
Secondary DNS Server IP Address	8.8.8.8 (or as specified by ISP)
Underlying Device	GROUP_2

4. Click **Apply**, and then **Done**.

The configured IP network interfaces are shown below:

Figure 3-3: Configured Network Interfaces in IP Interfaces Table

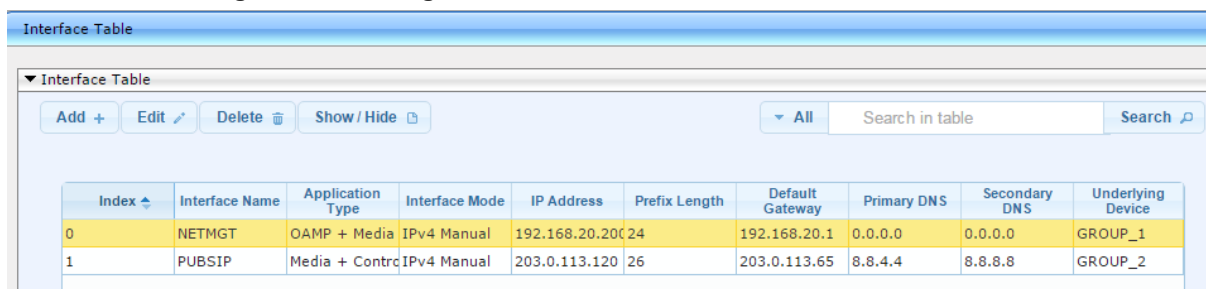

Index	Interface Name	Application Type	Interface Mode	IP Address	Prefix Length	Default Gateway	Primary DNS	Secondary DNS	Underlying Device
0	NETMGT	OAMP + Media	IPv4 Manual	192.168.20.200	24	192.168.20.1	0.0.0.0	0.0.0.0	GROUP_1
1	PUBSIP	Media + Control	IPv4 Manual	203.0.113.120	26	203.0.113.65	8.8.4.4	8.8.8.8	GROUP_2

3.2 Step 2: Enable the SBC Application

This step describes how to enable the SBC application if on a hybrid device

➤ **To enable the SBC application:**

1. Open the Applications Enabling page (**Configuration** tab > **VoIP** menu > **Applications Enabling** > **Applications Enabling**).

Figure 3-4: Enabling SBC Application



2. From the 'SBC Application' drop-down list, select **Enable**.
3. Click **Submit**.
4. Reset the SBC with a burn to flash for the setting to take effect (see Section 3.12 on page 70).

3.3 Step 3: Configure Signaling Routing Domains

This step describes how to configure Signaling Routing Domains (SRDs). The SRD is a logical representation of an entire SIP-based VoIP network (Layer 5) consisting of groups of SIP users and servers. The SRD is associated with all the configuration entities (e.g., SIP Interfaces and IP Groups) required for routing calls within the network. Typically, only a *single* SRD is required (recommended) for most deployments. Multiple SRDs are only required for multi-tenant deployments, where the physical device is "split" into multiple logical devices. In this case, it is suitable to use the default SRD. The SRD comprises:


- SIP Interface (mandatory)
- IP Group (mandatory)
- Proxy Set (mandatory)
- Admission Control rule (optional)
- Classification rule (optional)

As each SIP Interface defines a different Layer-3 network on which to route or receive calls and as you can assign multiple SIP Interfaces to the same SRD, for most deployment scenarios (even for multiple Layer-3 network environments), you only need to employ a single SRD to represent your VoIP network (Layer 5). For example, if your VoIP deployment consists of a Genesys SIP Server (LAN), a SIP Trunk (WAN), and far-end users (WAN), you would only need a single SRD. The single SRD would be assigned to three different SIP Interfaces, where each SIP Interface would represent a specific Layer-3 network (IP PBX, SIP Trunk, or far-end users) in your environment.

➤ **To view the default SRD:**

- Access the SRD Table (**Configuration > VoIP > VoIP Network > SRD Table**).

Figure 3-5: SRD Table

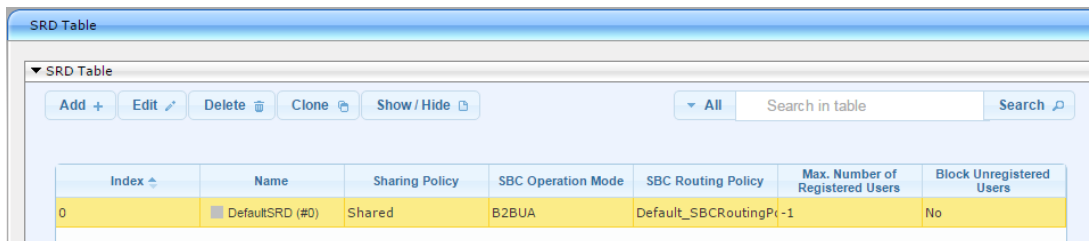

Index	Name	Sharing Policy	SBC Operation Mode	SBC Routing Policy	Max. Number of Registered Users	Block Unregistered Users
0	DefaultSRD (#0)	Shared	B2BUA	Default_SBCRoutingP(-1)	-1	No

3.3.1 Step 3a: Configure Media Realms

This step describes how to configure Media Realms. The simplest way is to create two Media Realms - one for internal (LAN) traffic and one for external (WAN) traffic.

➤ **To configure Media Realms:**

1. Open the Media Realm Table page (**Configuration tab > VoIP menu > VoIP Network > Media Realm Table**).
2. Modify the existing Media Realm for LAN traffic:

Parameter	Value
Index	1
Media Realm Name	MR-SBC2Genesys (descriptive name)
IPv4 Interface Name	NETMG T
Port Range Start	6000 (represents lowest UDP port number used for media on LAN).
Number of Media Session Legs	100 (media sessions assigned with port range)

Figure 3-6: Configure Media Realm for LAN

→ Index: 1

→ Name: MR1-SBC2Genesys

→ IPv4 Interface Name: NETMGT

→ Port Range Start: 6000

→ Number Of Media Session Legs: 100

Port Range End: 6499

Default Media Realm: No

QoE Profile: None

BW Profile: None

Save Cancel

3. Configure a Media Realm for WAN traffic:

Parameter	Value
Index	2
Media Realm Name	MR2-SBC2ITSP (arbitrary name)
IPv4 Interface Name	PUBSIP
Port Range Start	8000 (represents the lowest UDP port number used for media on WAN).
Number of Media Session Legs	100 (media sessions assigned with port range).

Figure 3-7: Configure Media Realm for WAN

→ Index: 2

→ Name: MR2-SBC2ITSP

→ IPv4 Interface Name: PUBSIP

→ Port Range Start: 8000

→ Number Of Media Session Legs: 100

Port Range End: 8499

Default Media Realm: No


QoE Profile: None

BW Profile: None

Save Cancel

The configured Media Realms are shown in the figure below:

Figure 3-8: Configured Media Realms in Media Realm Table

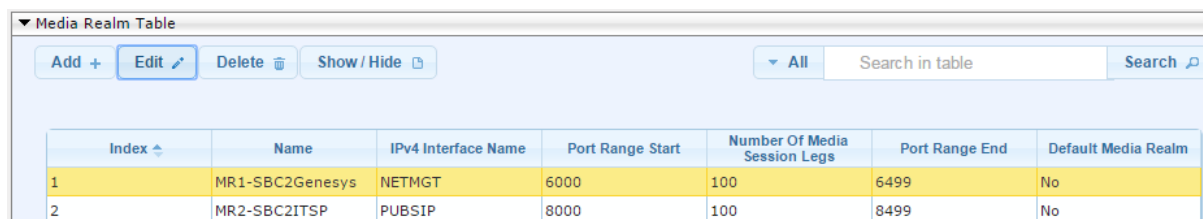

Index	Name	IPv4 Interface Name	Port Range Start	Number Of Media Session Legs	Port Range End	Default Media Realm
1	MR1-SBC2Genesys	NETMGMT	6000	100	6499	No
2	MR2-SBC2ITSP	PUBSIP	8000	100	8499	No

3.3.2 Step 3b: Configure SIP Signaling Interfaces

This step describes how to configure SIP Interfaces. For the interoperability test topology, an internal and external SIP Interface is configured for the SBC.

➤ **To configure SIP Interfaces:**

1. Open the SIP Interface Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **SIP Interface Table**).
2. Configure a SIP interface for the LAN:


Parameter	Value
Index	1
Interface Name	Genesys (arbitrary descriptive name)
Network Interface	NETMGMT
Application Type	SBC
UDP	5060
SRD	DefaultSRD

3. Configure a SIP interface for the WAN:

Parameter	Value
Index	2
Interface Name	ITSP (arbitrary descriptive name)
Network Interface	Untrusted
Application Type	SBC
UDP	5060
SRD	DefaultSRD

The configured SIP Interfaces are shown in the figure below:

Figure 3-9: Configured SIP Interfaces in SIP Interface Table

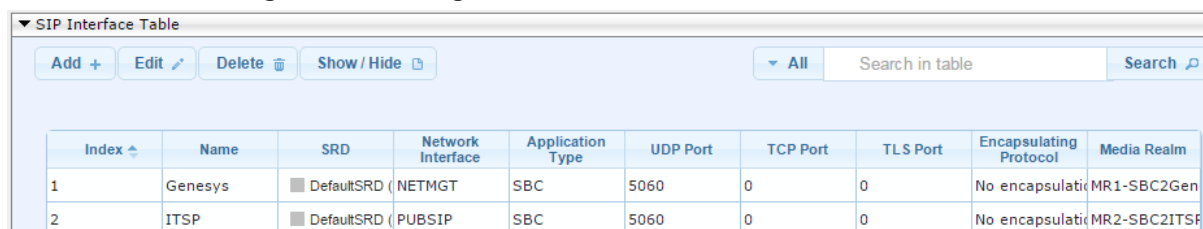

Index	Name	SRD	Network Interface	Application Type	UDP Port	TCP Port	TLS Port	Encapsulating Protocol	Media Realm
1	Genesys	DefaultSRD	NETMGMT	SBC	5060	0	0	No encapsulation	MR1-SBC2Gen
2	ITSP	DefaultSRD	PUBSIP	SBC	5060	0	0	No encapsulation	MR2-SBC2ITSP

3.4 Step 4: Configure Proxy Sets

This step describes how to configure Proxy Sets. The Proxy Set defines the destination address (IP address or FQDN) of the IP entity server. Proxy Sets can also be used to configure load balancing between multiple servers. For the interoperability test topology, two Proxy Sets must be configured for the following IP entities:

- Genesys Contact Center SIP Server
- BT Italia ITSP SIP Trunk

These Proxy Sets will later be associated with IP Groups.

➤ To configure Proxy Sets:

1. Open the Proxy Sets Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **Proxy Sets Table**).
2. Configure a Proxy Set for the Genesys Contact Center:

Parameter	Value
Proxy Set ID	1
SRD	DefaultSRD
Name	Genesys SIP Server
SBC IPv4 SIP Interface	Genesys
Proxy Keep Alive	Using OPTIONS
Proxy Address	sipserver.genesys-domain.com:5060 Genesys Contact Center IP address / FQDN and destination port.
Transport Type	UDP

Figure 3-10: Configure Proxy Set for Genesys Contact Center SIP Server


The 'Edit Row' dialog box contains the following parameters and values:

- Index: 1
- SRD: DefaultSRD
- Name: Genesys SIP Server
- SBC IPv4 SIP Interface: Genesys
- Proxy Keep-Alive: Using OPTIONS
- Proxy Keep-Alive Time [sec]: 60
- Redundancy Mode: (empty dropdown)
- Proxy Load Balancing Method: Disable
- DNS Resolve Method: (empty dropdown)
- Proxy Hot Swap: Disable
- Keep-Alive Failure Responses: (empty dropdown)
- Classification Input: IP Address only
- TLS Context Name: None

Buttons at the bottom: Save, Cancel

3. While positioned on the Proxy Set index, select the Proxy Address Table link at the bottom of the page and configure the address / FQDN for the proxy. Open the Proxy Sets Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **Proxy Sets Table**), position on index, select **Proxy Address Table**, and then select **Add**.

Figure 3-11: Proxy Address Table - Add Row

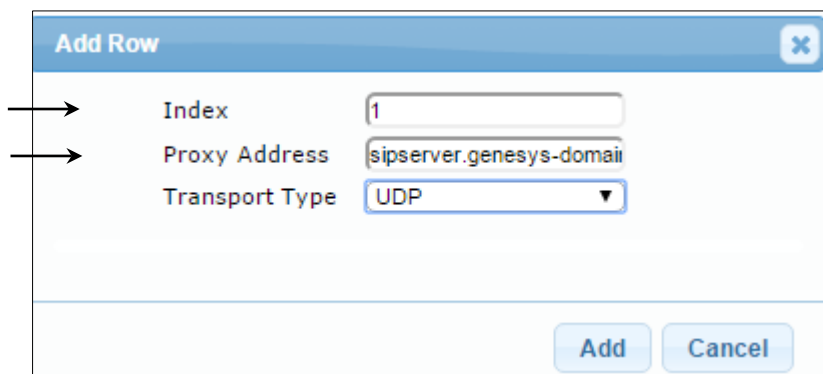

4. Repeat Steps 1-3 for the ITSP Proxy Set.

Parameter	Value
Proxy Set ID	2
SRD	DefaultSRD
Name	ITSP (arbitrary)
SBC IPv4 SIP Interface	ITSP
Proxy Keep Alive	Using OPTIONS
Proxy Address	gw0.itsp-iot.com:5060 ITSP IP address / FQDN and destination port.
Transport Type	UDP

Figure 3-12: Configure Proxy Set for ITSP SIP Trunk

Edit Row

Index	2
SRD	DefaultSRD
Name	ITSP
SBC IPv4 SIP Interface	ITSP
Proxy Keep-Alive	Using OPTIONS
Proxy Keep-Alive Time [sec]	60
Redundancy Mode	
Proxy Load Balancing Method	Disable
DNS Resolve Method	
Proxy Hot Swap	Disable
Keep-Alive Failure Responses	
Classification Input	IP Address only
TLS Context Name	None

Save Cancel

Figure 3-13: Configure Proxy Set for ITSP SIP Trunk – Add Row

Add Row

Index	1
Proxy Address	gw0.itsp-iot.com:5060
Transport Type	UDP

Add Cancel

3.5 Step 5: Configure IP Groups

This step describes how to configure IP Groups. The IP Group represents an IP entity on the network with which the SBC communicates. This can be a server (e.g., IP PBX or ITSP) or a group of users (e.g., LAN IP phones). For servers, the IP Group is typically used to define the server's IP address by associating it with a Proxy Set. A typical deployment consists of multiple IP Groups associated with the same SRD. For example, you can have a LAN IP PBXs sharing the same SRD, with an ITSP / SIP Trunk and a User group. Once IP Groups are configured, they are used to configure IP-to-IP routing rules for denoting the source and destination of the call.

In the interoperability test topology, IP Groups were configured for the following IP entities:

- Genesys Contact Center located on LAN (Server Group)
- ITSP SIP Trunk located on WAN (Server Group)
- Remote User Agents located in the WAN (User Group) (see Section 3.10 on page 54)

➤ To configure IP Groups:

1. Open the IP Group Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **IP Group Table**).
2. Configure an IP Group for the Genesys Contact Center SIP Server:

Parameter	Value
Index	1
Type	Server
Description	Genesys (arbitrary descriptive name)
Proxy Set ID	Genesys
SRD	DefaultSRD
Media Realm Name	MR1-SBC2Genesys
IP Profile ID	Genesys

Figure 3-14: Configure an IP Group for the Genesys Call Center (Common Tab)

The screenshot shows the 'Edit Row' dialog box with the 'Common' tab selected. The 'Index' is set to 1 and the 'SRD' is set to 'DefaultSRD'. The following fields are configured:

Field	Value
Name	Genesys
Type	Server
Proxy Set	Genesys SIP Server
IP Profile	Genesys
Media Realm	MR1-SBC2Genesys
SIP Group Name	
QoE Profile	None
Media Enhancement Profile	None
Bandwidth Profile	None
Always Use Src Address	No
Contact User	
Local Host Name	
UII Format	Disable
Used By Routing	Not Used

Buttons: Save, Cancel

Figure 3-15: Configure an IP Group for the Genesys Call Center (SBC Tab)

The screenshot shows the 'Edit Row' dialog box with the 'SBC' tab selected. The 'Index' is set to 1 and the 'SRD' is set to 'DefaultSRD'. The following fields are configured:

Field	Value
SBC Operation Mode	B2BUA
Classify By Proxy Set	Enable

3. Configure an IP Group for the ITSP SIP Trunk:

Parameter	Value
Index	2
Type	Server
Description	ITSP (arbitrary descriptive name)
Proxy Set ID	ITSP
SRD	DefaultSRD
Media Realm Name	MR2-SBC2ITSP
IP Profile ID	ITSP

Figure 3-16: Configure an IP Group for the ITSP SIP Trunk (Common Tab)

The screenshot shows the 'Edit Row' dialog box for configuring an IP Group. The 'Common' tab is selected. The 'Index' is set to 2 and the 'SRD' is set to 'DefaultSRD'. The following fields are visible:

Field	Value
Name	ITSP
Type	Server
Proxy Set	ITSP
IP Profile	ITSP
Media Realm	MR2-SBC2ITSP
SIP Group Name	
QoE Profile	None
Media Enhancement Profile	None
Bandwidth Profile	None
Always Use Src Address	No
Contact User	
Local Host Name	
UI Format	Disable
Used By Routing	Not Used

Buttons: Save, Cancel

Figure 3-17: Configure an IP Group for the ITSP SIP Trunk (SBC Tab)

The screenshot shows the 'Edit Row' dialog box for configuring an IP Group. The 'SBC' tab is selected. The 'Index' is set to 2 and the 'SRD' is set to 'DefaultSRD'. The following fields are visible:

Field	Value
SBC Operation Mode	B2BUA
Classify By Proxy Set	Enable

The configured IP Groups are shown in the figure below:

Figure 3-18: Configured IP Groups in IP Group Table

▼ IP Group Table											
Add + Edit ✎ Delete 🗑 Show / Hide 📄				▼ All		Search in table		Search 🔍			
Index ↕	Name	SRD	Type	SBC Operation Mode	Proxy Set	IP Profile	Media Realm	SIP Group Name	Classify By Proxy Set	Inbound Message Manipulation Set	Outbound Message Manipulation Set
1	Genesys	■ DefaultSR	Server	B2BUA	Genesys SIP	Genesys	MR1-SBC2G		Enable	3	12
2	ITSP	■ DefaultSR	Server	B2BUA	ITSP	ITSP	MR2-SBC2IT		Enable	-1	1

3.6 Step 6: Configure IP Profiles

This step describes how to configure IP Profiles. In this interoperability test topology, the IP Profile defines a set of call capabilities relating to signaling (e.g., SIP message terminations such as REFER) and media (e.g., coder and transcoding method).

In this interoperability test topology, IP Profiles were configured for the following IP entities:

- Genesys Contact Center
- BT Italia ITSP SIP trunk




Note: The IP Profile index values were assigned to the IP Groups in the previous step (see Section 3.5 on page 30).

➤ **To configure IP Profiles:**


1. Open the IP Profile Settings page (**Configuration** tab > **VoIP** > **Coders and Profiles** > **IP Profile Settings**).
2. Click **Add**.
3. Click the **Common** tab, and then configure the parameters as follows:

Parameter	Value
Index	1
Profile Name	Genesys SIP Server (arbitrary descriptive name)

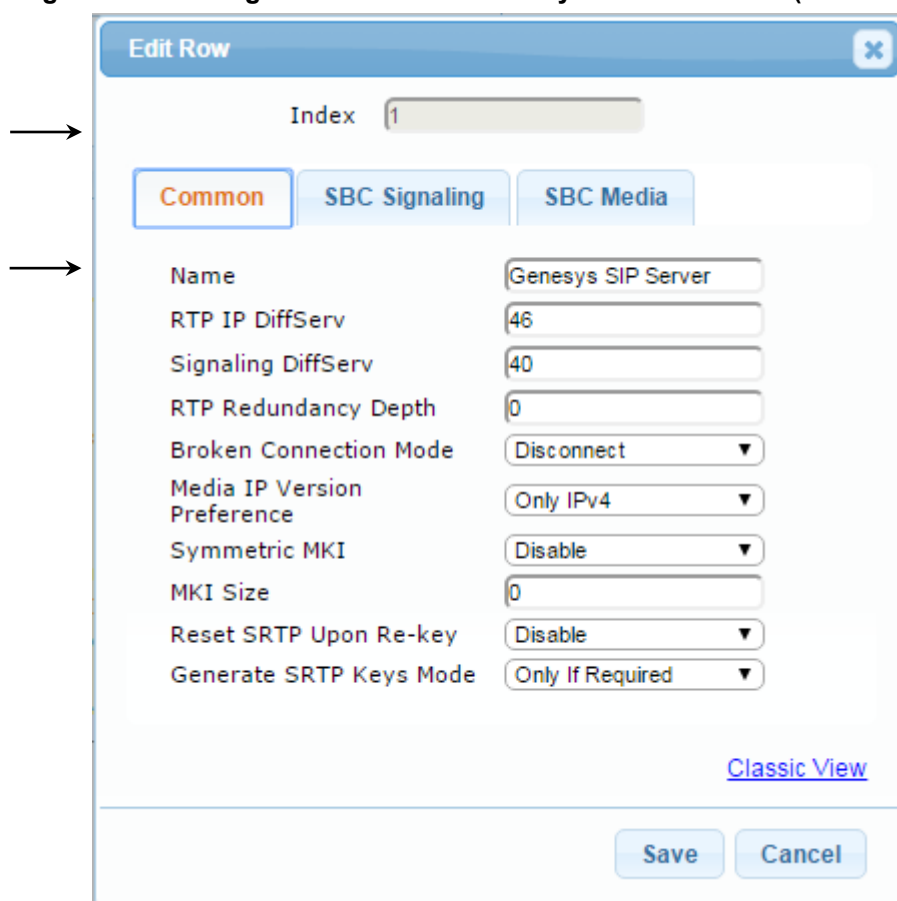Figure 3-19: Configure IP Profile for Genesys Contact Center (Common Tab)


4. Click the **SBC** tab, and then configure the parameters as follows:

Parameter	Value
Allowed Coders Group ID	'Coders Group 1'

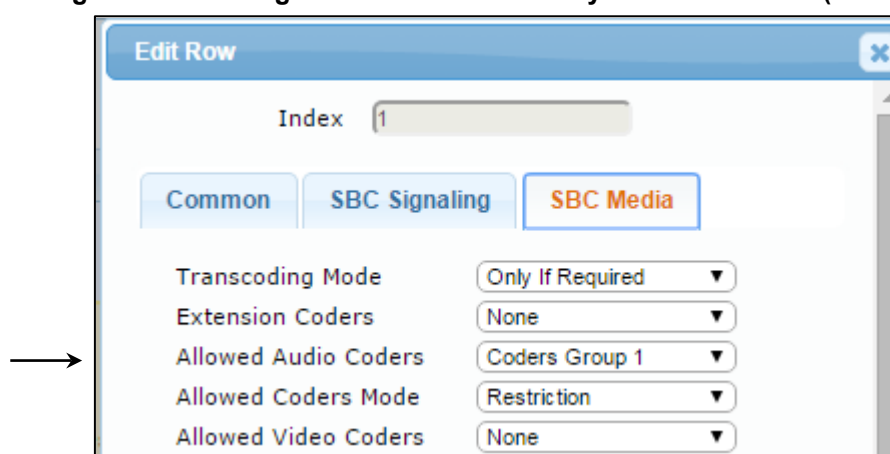Figure 3-20: Configure IP Profile for Genesys Contact Center (SBC Tab)


5. Configure an IP Profile for the BT Italia ITSP SIP Trunk:

a. Click **Add**.

b. Click the **Common** tab, and then configure the parameters as follows:

Parameter	Value
Index	2
Profile Name	ITSP (arbitrary descriptive name)

Figure 3-21: Configure IP Profile for ITSP SIP Trunk (Common Tab)

The screenshot shows the 'Edit Row' dialog box for configuring an IP Profile. The 'Index' field is set to 2. The 'Common' tab is selected. The 'Name' field is set to 'ITSP'. Other parameters include RTP IP DiffServ (46), Signaling DiffServ (40), RTP Redundancy Depth (0), Broken Connection Mode (Disconnect), Media IP Version Preference (Only IPv4), Symmetric MKI (Disable), MKI Size (0), Reset SRTP Upon Re-key (Disable), and Generate SRTP Keys Mode (Only If Required). A 'Classic View' link is at the bottom right, and 'Save' and 'Cancel' buttons are at the bottom.

c. Click the **SBC Signaling** tab and then configure the parameters as follows:

Parameter	Value
Remote REFER Behavior	'Handle Locally'
Remote Delayed Offer Support	'Not Supported' : BT Italia does not support receiving INVITE without SDP. In this case, it is necessary to use an extended coders group to provide the SBC a set of coders that can be offered to the ITSP side.
Session Expires Mode (not supported by BT Italia; interoperability was completed with this parameter set to Transparent)	'Transparent' : one of Remote Update Support or Remote Re-INVITE support must be supported to refresh the session (default). 'Not Supported' : If Remote UPDATE/Re-INVITE is 'Not Supported' , Session Expires Mode should also be made 'Not Supported' .
Remote Update Support (Optional)	'Supported'/'Not Supported'/'Supported Only After'
Remote Re-INVITE Support	'Supported'/'Not Supported'

Parameter	Value
(Optional)	

Figure 3-22: Configure IP Profile for ITSP SIP Trunk – SBC Tab

Edit Row

Index 2

Common
SBC Signaling
SBC Media

PRACK Mode
Transparent

P-Asserted-Identity Header Mode
As Is

Diversion Header Mode
As Is

History-Info Header Mode
As Is

→ Session Expires Mode
Transparent

→ Remote Update Support
Supported Only After

→ Remote re-INVITE
Supported

→ Remote Delayed Offer Support
Not Supported

User Registration Time
0

NAT UDP Registration Time
-1

NAT TCP Registration Time
-1

→ Remote REFER Mode
Handle Locally


Remote Replaces Mode
Standard

Play RBT To Transferee
No

→ Remote 3xx Mode
Handle Locally


- d. Click the **SBC Media** tab, and then configure the parameters as follows:

Parameter	Value
Allowed Coders Group ID	'Coders Group 2'


Figure 3-23: Configure IP Profile for ITSP SIP Trunk – SBC Tab


→

Note:

- 
- BT Italia does not Support SIP 302 Moved Temporarily.
 - The SBC may handle the 302 Moved Temporarily locally; the 302 Moved Temporarily response from the SIP server is accepted by the SBC, and then the SBC sends an INVITE to the temporary external number via the ITSP SIP Trunk. Notify messages are passed to the SIP server to provide status on the pending connection. The call is anchored by the SBC.
 - The 302 Moved Temporarily handling on the SBC is configured by setting *SBCRemote3xxBehavior* = 'handle locally' in the IP Profile for the ITSP IP Group, and by setting an IP2IP route for calls originating from the ITSP IP Group to trigger on 3xx/REFER and route to ITSP IP Group.

Note:

- 
- The preferred method is that the SBC should be configured to handle the REFER locally. When the SBC receives the REFER, the SBC sends an INVITE to the new destination via the ITSP SIP Trunk or via the Genesys SIP server according to routing rules. Notify messages are passed to the SIP server to provide status on the pending connection. The call is anchored by the SBC.

The REFER handling on the SBC is configured by setting *SBCRemote3xxBehavior* = 'handle locally' in the IP Profile for the ITSP IP Group, and by setting an IP2IP route for calls originating from the ITSP IP Group to trigger on 3xx/REFER and route to the ITSP IP Group.

The configured IP Groups are shown in the figure below:

Figure 3-24: Configured IP Profiles in IP Profile Table

IP Profile Settings	
Add +	
Index	Profile Name
1	Genesys SIP Server
2	ITSP

3.7 Step 7: Configure Coders

This section shows how to configure an Allowed Coders Group to ensure that voice sent to the ITSP SIP Trunk uses the preferred coders only. The BT Italia SIP Trunk supports G.711A-law and G.729 coders. The Genesys Contact Center supports G.729, G.711A-law, G.711U-law, G.723 and GSM coders. Since both entities have common codecs supported, transcoding is not required. However, to ensure transcoding is not used, IP Profiles for both the ITSP and Genesys trunks are configured to use the same Allowed Coders Group ID (configured in previous section).


If support for different coders is required in the deployment, an SBC transcoding configuration is required (refer to the *SBC User's Manual*) for Coder Transcoding configuration.

➤ **To set a preferred coder for the BT Italia SIP & Genesys Trunk:**

1. Open the Allowed Coders Group page (**Configuration** tab > **VoIP** > **SBC** > **Allowed Coders Group**).
2. Configure an Allowed Coders Group as follows:

Parameter	Value
Allowed Coders Group ID	1
Coder Name	G.729
Coder Name	G.711A-Law

Figure 3-25: Configure an Allowed Coders Group

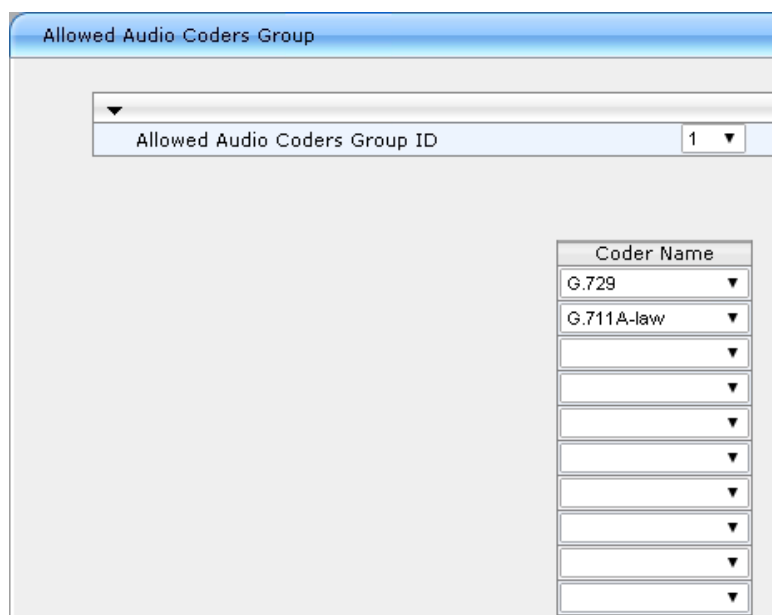

3. **Submit**
4. Repeat for Allowed Coders Group ID 2 (or set to use the same Allowed Audio Coders Group in the IP Profiles for the ITSP & SIP Server).

3.8 Step 8: Configure IP-to-IP Call Routing Rules

This step describes how to configure IP-to-IP call routing rules. These rules define the routes for forwarding SIP messages (e.g., INVITE) received from one IP entity to another. The SBC selects the rule whose configured input characteristics (e.g., IP Group) match those of the incoming SIP message. If the input characteristics do not match the first rule in the table, it is compared to the second rule, and so on, until a matching rule is located. If no rule is matched, the message is rejected. The routing rules use the configured IP Groups to denote the source and destination of the call. As configured in Section 3.5 on page 30, IP Group 1 represents the Genesys Contact Center, and IP Group 2 represents the ITSP SIP Trunk.

For the interoperability test topology, the following IP-to-IP routing rules are configured to route calls between Genesys Contact Center (LAN) and ITSP SIP Trunk (WAN):


- Terminate SIP OPTIONS messages on the SBC that are received from the LAN/WAN
- Route calls from Genesys Contact Center to the BT Italia ITSP SIP Trunk
- Calls from BT Italia ITSP SIP Trunk to Genesys Contact Center
- Trigger rules for handling SIP 3xx/REFER for local agents and external DNS

➤ **To configure IP-to-IP routing rules:**

1. Open the IP-to-IP Routing Table page (**Configuration** tab > **VoIP** menu > **SBC** > **Routing SBC** > **IP-to-IP Routing Table**).
2. Configure a rule to terminate SIP OPTIONS messages received from the LAN:
 - a. Click **Add**.
 - d. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	1
Route Name	OPTIONS termination (arbitrary descriptive name)
Request Type	OPTIONS

Figure 3-26: Configure IP-to-IP Routing Rule for Terminating SIP OPTIONS - Rule Tab

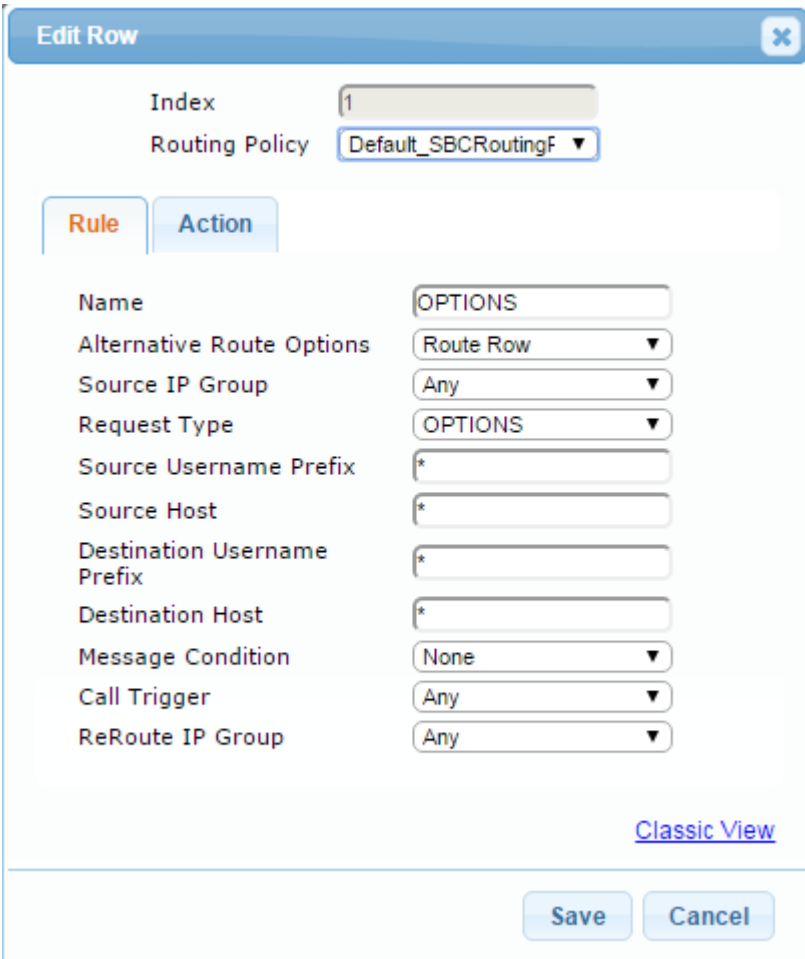

→

→

→

Index: 1

Routing Policy: Default_SBCRoutingF

Rule | Action

Name: OPTIONS

Alternative Route Options: Route Row

Source IP Group: Any

Request Type: OPTIONS

Source Username Prefix: *

Source Host: *

Destination Username Prefix: *

Destination Host: *

Message Condition: None

Call Trigger: Any

ReRoute IP Group: Any

[Classic View](#)

Save Cancel

- Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Destination Type	Dest Address
Destination Address	internal

Figure 3-27: Configure IP-to-IP Routing Rule for Terminating SIP OPTIONS - Action Tab

Edit Row [X]

Index: 1
Routing Policy: Default_SBCRoutingF ▼

Rule | **Action**

Destination Type: Dest Address ▼
Destination IP Group: None ▼
Destination SIP Interface: None ▼
Destination Address: internal
Destination Port: 0
Destination Transport Type: ▼
Call Setup Rules Set ID: -1
Group Policy: None ▼
Cost Group: None ▼


[Classic View](#)

Save Cancel

4. Configure a rule to route calls from Genesys Contact Center to BT Italia SIP Trunk:
 - a. Click **Add**.
 - b. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	8
Route Name	Genesys2ITSP (arbitrary descriptive name)
Source IP Group ID	Genesys

Figure 3-28: Configure IP-to-IP Routing Rule for Genesys to ITSP – Rule tab

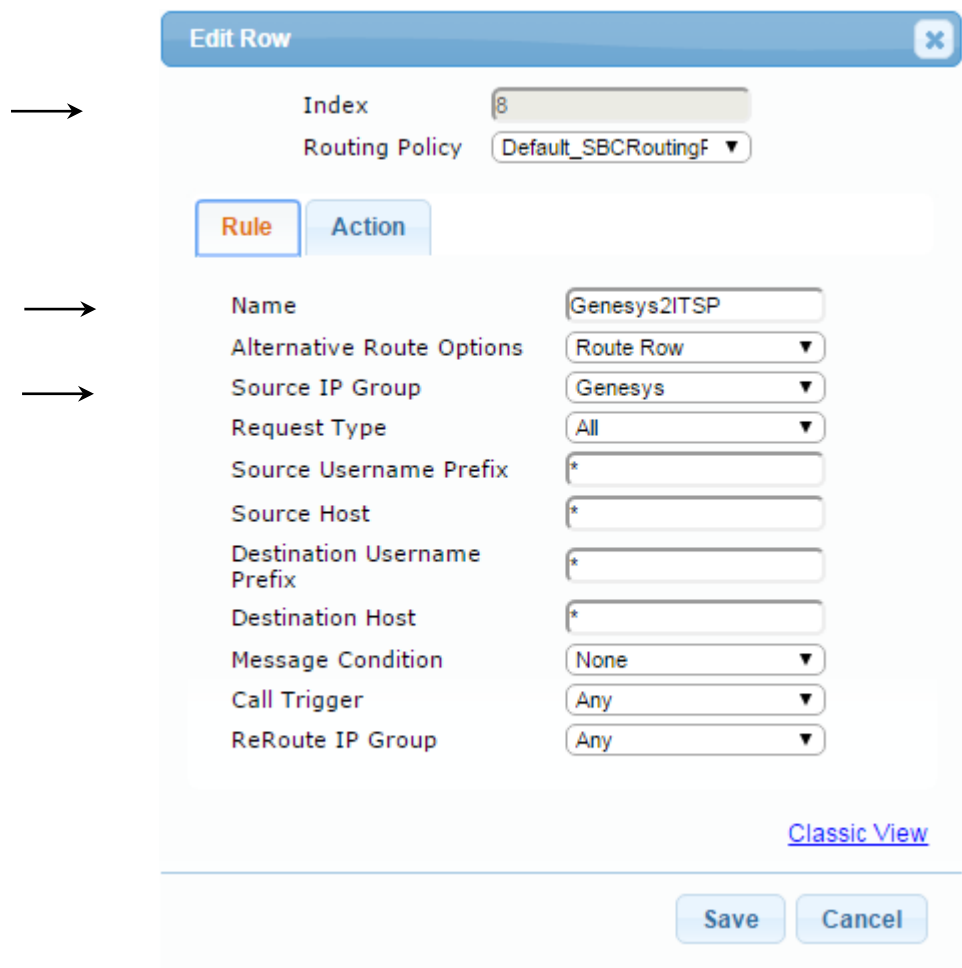

Edit Row

Index

8

Routing Policy

Default_SBCRoutingF

Rule

Action

Name

Genesys2ITSP

Alternative Route Options

Route Row

Source IP Group

Genesys

Request Type

All

Source Username Prefix

*

Source Host

*

Destination Username Prefix

*

Destination Host

*

Message Condition

None

Call Trigger

Any

ReRoute IP Group

Any

[Classic View](#)

Save

Cancel

5. Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Destination Type	IP Group
Destination IP Group ID	2
Destination SIP Interface	2

Figure 3-29: Configure IP-to-IP Routing Rule for Genesys to ITSP – Action tab

Edit Row [X]

Index: 8
Routing Policy: Default_SBCRoutingF

Rule | **Action**

Destination Type: IP Group ▼
Destination IP Group: ITSP ▼
Destination SIP Interface: ITSP ▼
Destination Address:
Destination Port: 0
Destination Transport Type: ▼
Call Setup Rules Set ID: -1
Group Policy: None ▼
Cost Group: None ▼


[Classic View](#)

Save Cancel

6. Configure a trigger rule to route local Agent REFERS to the network from to the Genesys Contact Center back to Genesys SIP Server:
 - a. Click **Add**.
 - b. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	3
Route Name	3xx/Refer local (arbitrary descriptive name)
Source IP Group ID	ITSP
Call Trigger	3xx or REFER
ReRoute IP Group	Genesys

Figure 3-30: Configure IP-to-IP Routing Trigger Rule for 3xx/REFER to local agents – Rule tab

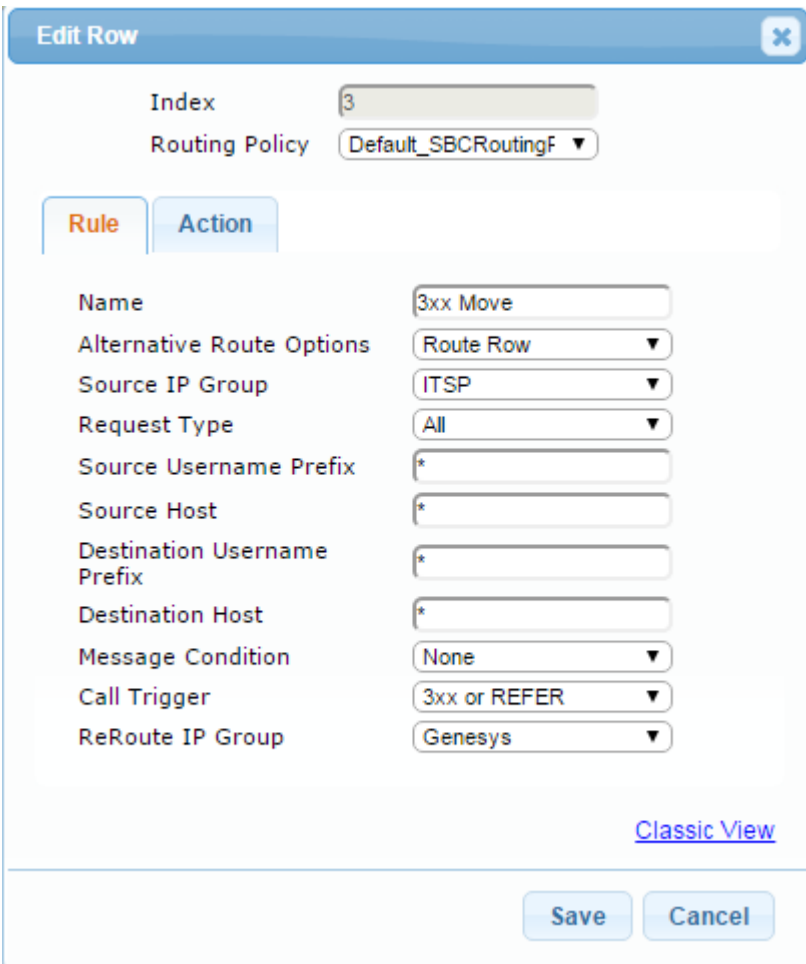

→ Index: 3

→ Routing Policy: Default_SBCRoutingF

→ Rule tab selected

→ Name: 3xx Move

→ Alternative Route Options: Route Row

→ Source IP Group: ITSP

→ Request Type: All

→ Source Username Prefix: *

→ Source Host: *

→ Destination Username Prefix: *

→ Destination Host: *

→ Message Condition: None

→ Call Trigger: 3xx or REFER

→ ReRoute IP Group: Genesys

Classic View

Save Cancel

7. Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Destination Type	IP Group
Destination IP Group ID	Genesys
Destination SRD ID	Genesys

Figure 3-31: Configure IP-to-IP Routing Rule for Trigger Rule for 3xx/REFER to local agents – Action Tab

→ Index 3

→ Routing Policy Default_SBCRoutingF

→ Rule Action

→ Destination Type IP Group

→ Destination IP Group Genesys

→ Destination SIP Interface Genesys

Destination Address

Destination Port 0

Destination Transport Type

Call Setup Rules Set ID -1

Group Policy None

Cost Group None


[Classic View](#)

Save Cancel

8. Configure a rule to route calls from ITSP SIP Trunk to the Genesys Contact Center:
 - a. Click **Add**.
 - b. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	4
Route Name	ITSP2Genesys (arbitrary descriptive name)
Source IP Group ID	ITSP

Figure 3-32: Configure IP-to-IP Routing Rule for ITSP to Genesys – Rule tab

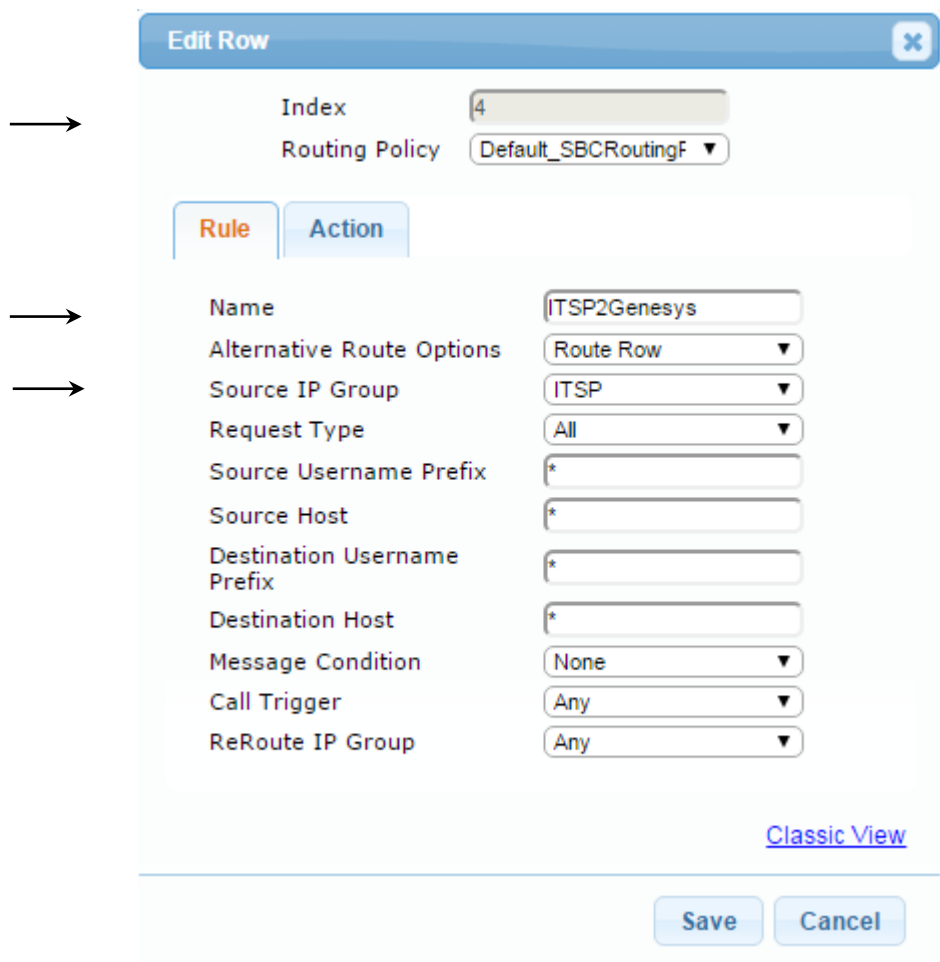

Edit Row

Index

4

Routing Policy

Default_SBCRoutingF

Rule

Action

Name

ITSP2Genesys

Alternative Route Options

Route Row

Source IP Group

ITSP

Request Type

All

Source Username Prefix

*

Source Host

*

Destination Username Prefix

*

Destination Host

*

Message Condition

None

Call Trigger

Any

ReRoute IP Group

Any

[Classic View](#)

Save

Cancel

9. Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Destination Type	IP Group
Destination IP Group ID	1
Destination SRD ID	1

Figure 3-33: Configure IP-to-IP Routing Rule for ITSP to Genesys – Action tab

The configured routing rules are shown in the figure below:

Figure 3-34: Configured IP-to-IP Routing Rules in IP-to-IP Routing Table

Index	Route Name	Routing Policy Name	Src IP Group Name	Src Username Prefix	Src Host	Dest Username Prefix	Dest Host	Request Type	Message Condition Name	Route IP Group Name	Trigger	Call Setup Rules Set ID	Dest Type	Dest IP Group Name	Dest SIP Interface Name	Dest Address	Dest Port	Dest Transport Type	Alt Route Options	Group Policy	Cost Group
1	OPTIONS	Default_SBC Routing Policy	Any	*	*	*	*	6 (OPTIONS)		Any	0 (Any)	-1	1 (Dest Address)			Internal	0	-1 ()	0 (Route Row)	0 (None)	
3	3xx Move	Default_SBC Routing Policy	ITSP	*	*	*	*	0 (All)		Genesys	3 (3xx or REFER)	-1	0 (IP Group)	Genesys	Genesys		0	-1 ()	0 (Route Row)	0 (None)	
4	ITSP2 Genesys	Default_SBC Routing Policy	ITSP	*	*	*	*	0 (All)		Any	0 (Any)	-1	0 (IP Group)	Genesys	Genesys		0	-1 ()	0 (Route Row)	0 (None)	
8	Genesys2ITSP	Default_SBC Routing Policy	Genesys	*	*	*	*	0 (All)		Any	0 (Any)	-1	0 (IP Group)	ITSP	ITSP		0	-1 ()	0 (Route Row)	0 (None)	



Note: The routing configuration may change according to your specific deployment topology, e.g., the deployment specification may indicate that OPTIONS termination should pass through the SBC to the far end, or, other criteria listed in the table may be used for determining routing.

3.9 Step 9: Configure IP-to-IP Manipulation Rules

This step describes how to configure IP-to-IP manipulation rules. These rules manipulate the source and / or destination number. The device supports SIP URI user part (source and destination) manipulations for inbound and outbound routing. The manipulation rules use the configured IP Groups to denote the source and destination of the call



Note The following manipulation rules are only examples. Adapt the manipulation table according to your environment dial plan.

Manipulations may be required to strip digits for an access code to the SBC from the Genesys SIP Server or for removing the country code and/or leading prefixes to map ITSP numbers to the DNS used in the Genesys environment.

➤ **To configure a number manipulation rule to remove the Country Code from messages arriving from the ITSP destined for the Genesys SIP Server:**

1. Open the IP-to-IP Inbound Manipulation page (**Configuration** tab > **VoIP** menu > **SBC > Manipulations SBC > IP-to-IP Inbound**).
2. Click **Add**.
3. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	1
Manipulation Name (optional)	Strip trunk access code
Source IP Group ID	Genesys
Request Type	INVITE and REGISTER
Manipulated URI	Destination

Figure 3-35: Configure IP-to-IP Inbound Manipulation Rule – Rule Tab

Edit Row

Index: 1

Routing Policy: Default_SBCRoutingF

Rule | Action

Name: strip trunk access code

Additional Manipulation: No

Request Type: All

Manipulation Purpose: Normal

Source IP Group: Genesys

Source Username Prefix: *

Source Host: *

Destination Username Prefix: 77*

Destination Host: *

[Classic View](#)

Save Cancel

➤ To configure a number manipulation rule to remove the trunk access code from messages arriving from Genesys destined for the ITSP:

1. Open the IP-to-IP Inbound Manipulation page (**Configuration** tab > **VoIP** menu > **SBC** > **Manipulations SBC** > **IP-to-IP Inbound**).
2. Click **Add**.
3. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	1
Manipulation Name (optional)	rm SBC access code
Source IP Group ID	Genesys
Destination Username Prefix	77

Figure 3-36: Configure IP-to-IP Inbound Manipulation Rule – Rule Tab

Edit Row

Index
1
Routing Policy
Default_SBCRoutingF

Rule

Action

Name
strip trunk access code
Additional Manipulation
No
Request Type
All
Manipulation Purpose
Normal
Source IP Group
Genesys
Source Username Prefix
*
Source Host
*
Destination Username Prefix
77*
Destination Host
*

[Classic View](#)

Save

Cancel

4. Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Manipulated URI	Destination
Remove from Left	2

Figure 3-37: Configure IP-to-IP Inbound Manipulation Rule - Action Tab

→

Index	2
Remove From Left	2
Remove From Right	0
Leave From Right	255
Prefix to Add	
Suffix to Add	

Submit Cancel

5. Click **Submit**.

The figure below shows an example of configured IP-to-IP inbound manipulation rule for calls between IP Group 2 (i.e., Genesys Contact Center) and IP Group 1 (i.e., ITSP SIP Trunk):

Figure 3-38: Example of Configured IP-to-IP Inbound Manipulation Rules

IP to IP Inbound Manipulation													
▼ IP to IP Inbound Manipulation													
Add + Edit ✎ Delete 🗑 Insert + Up ↑ Down ↓ Show/Hide ☰ All Search in table Search 🔍													
Index	Name	Routing Policy	Additional Manipulation	Manipulation Purpose	Source IP Group	Source Username Prefix	Destination Username Prefix	Manipulated URI	Remove From Left	Remove From Right	Leave From Right	Prefix to Add	Suffix to Add
1	strip trunk	Default_SENo		Normal	Genesys	*	77*	Destination	2	0	255		

3.10 Step 10: Perform SIP Header Message Manipulations

This step describes the SBC configuration for SIP Message Header Manipulations. A Message Manipulation rule defines a manipulation sequence for SIP messages. SIP message manipulation enables the normalization of SIP messaging fields between communicating network segments. For example, this functionality allows ITSPs to design policies on the SIP messaging fields that must be present before a SIP call enters the ITSP network. Similarly, the enterprise may have policies for the information that can enter or leave its network for policy and security reasons from an ITSP.

Each Message Manipulation rule is configured with a Manipulation Set ID. Sets of manipulation rules are created by assigning each of the relevant Message Manipulation rules to the same Manipulation Set ID. The Manipulation Set ID is used to assign the rules to the specific calls by designating that set ID in the preferred IP Group table. Message rules can be applied pre- (inbound manipulation) or post-classification (outbound manipulation).


For this interoperability test, message manipulations were applied only to the outbound messages, to the ITSP SIP trunk, for the purposes of modifying existing SIP headers, topology hiding, and adding new SIP headers.

The following procedure generically describes how to configure Message Manipulation rules in the Web interface of the SBC.

➤ To configure SIP Message Manipulation rules:

1. Open the IP-to-IP Inbound Manipulation page (**Configuration** tab > **VoIP** menu > **SIP Definitions** > **Msg Policy & Manipulation** > **Message Manipulations**).
2. Click **Add**; this screen opens:

Figure 3-38: Configure IP-to-IP Inbound Manipulation Rule - Action Tab

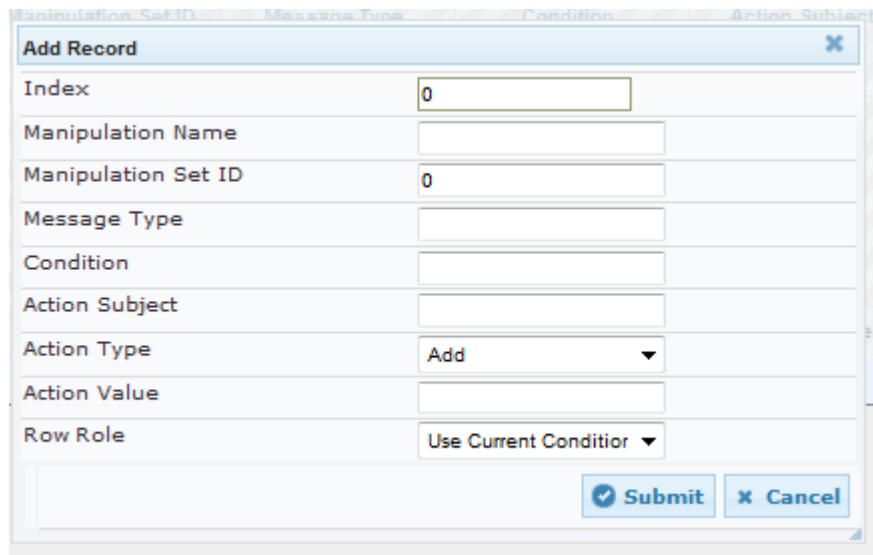

Manipulation Set ID	Message Type	Condition	Action Subject
Add Record			
Index	0		
Manipulation Name			
Manipulation Set ID	0		
Message Type			
Condition			
Action Subject			
Action Type	Add		
Action Value			
Row Role	Use Current Condition		
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>			

3. Configure a Message Manipulation rule according to the parameters described in the table below.
4. Click **Submit** and then save ("burn") your settings to flash memory.

The table below shows the message manipulation used in the interoperability test scenario.

[MessageManipulations]

Index	Manipulation Name	Man Set ID	Message Type	Condition	Action Subject	Action Type	Action Value	Row Role
0	max forwards	0	any.request	header.max-forwards == '10'	header.max-forwards.val	2 (Modify)	'30'	0 (Use Current Condition)
1	From header	0	Any.Request		Header.From.Url.Host	2 (Modify)	'extlab.com'	0 (Use Current Condition)
2	From header userphone	0	Any.Request		Header.from.url.userphone	2 (Modify)	'1'	0 (Use Current Condition)
3	To header	0	Any.request	Header.to.url.host == '10.38.5.107'	Header.to.url.host	2 (Modify)	'213.213.83.147'	0 (Use Current Condition)
4	To header userphone	0	Any.request		header.to.url.userphone	2 (Modify)	'1'	0 (Use Current Condition)
5	URI port	0	Any.request		header.Request-URI.url.port	0 (Add)	'5060'	0 (Use Current Condition)
10	URI host	0	Any.request	header.REQUEST-URI.url.host == '10.38.5.39'	header.REQUEST-URI.url.host	2 (Modify)	'213.213.83.147'	0 (Use Current Condition)
11	URI host to Genesys	1	Any.request	header.REQUEST-URI.url.host == '173.227.254.124'	header.REQUEST_URI.url.host	2 (Modify)	'10.38.5.39'	0 (Use Current Condition)
12	From header	1	any.request	header.from.url.host == 'extlab.com'	header.from.url.host	2 (Modify)	'10.38.5.39'	0 (Use Current Condition)
13	To header	1	any.request	header.to.url.host == '213.213.83.145'	header.to.url.host	2 (Modify)	'10.38.5.107'	0 (Use Current Condition)

The outbound manipulation rules are not applied for a particular IP Group until the Manipulation Set is assigned as an inbound or outbound manipulation set. In the interoperability test scenario, Manipulation Set 1 was applied to the ITSP IP Group.

3.11 Step 11: Configure Remote Agents

This step describes the SBC configuration for Remote User Agents. Remote Agent DNs are registered on the SBC or through the SBC to the Genesys SIP Server. In the interoperability testing scenario, the Remote Agents are configured on a new Signaling Routing Domain over an existing untrusted interface.


3.11.1 Step 11a: Configure Media Realm for a Remote Agent

This step describes how to configure Media Realms for a Remote Agent. Remote Agents interact with the SBC over the untrusted interface. Use the Media Realm table to designate the media port range that will be associated with the Remote Agents.

➤ To configure the Media Realm for a Remote Agent:

1. Open the **Advanced Parameters** page (**Configuration** tab > **VoIP** menu > **Media Realm Table**).


Figure 3-39: Configure a Remote Agent Media Realm

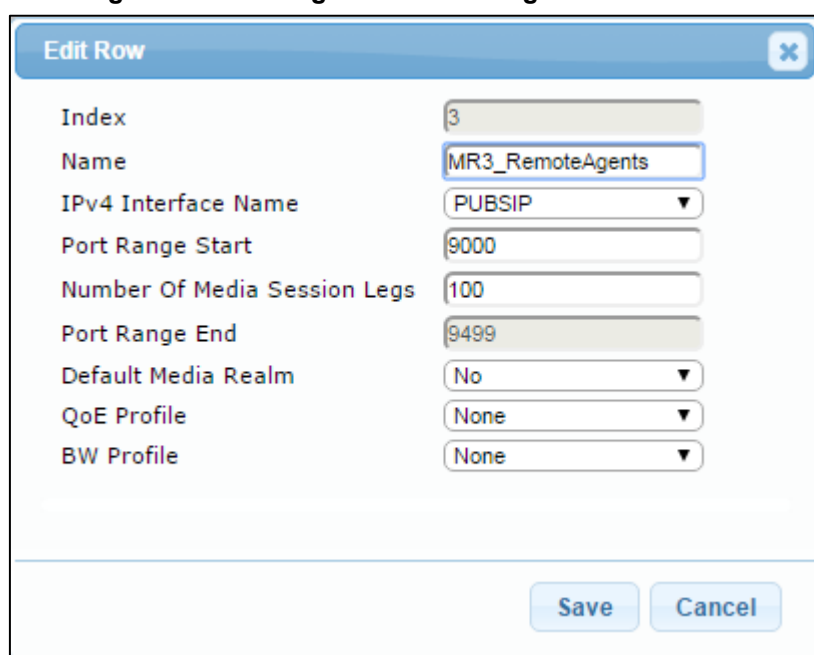

Index	3
Name	MR3_RemoteAgents
IPv4 Interface Name	PUBSIP
Port Range Start	9000
Number Of Media Session Legs	100
Port Range End	9499
Default Media Realm	No
QoE Profile	None
BW Profile	None

The figure below shows an example of a configured Media Realm Table including the Media Realm for Remote Agents.

Figure 3-40: Configure a Remote Agent Media Realm

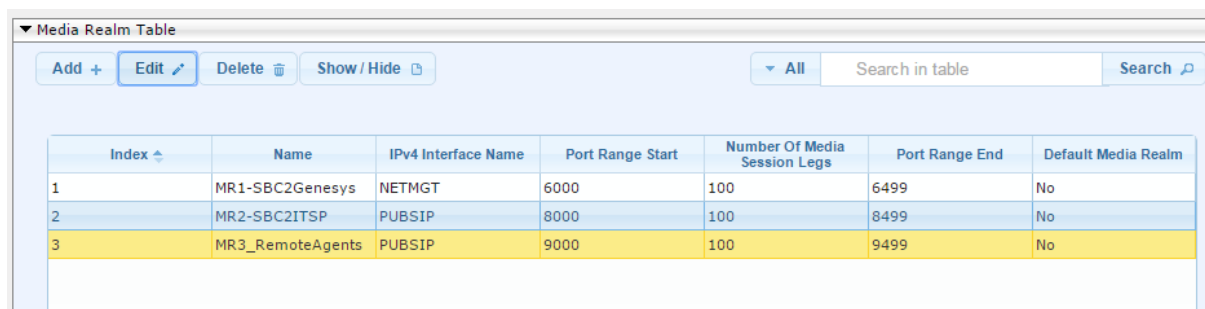

Index	Name	IPv4 Interface Name	Port Range Start	Number Of Media Session Legs	Port Range End	Default Media Realm
1	MR1-SBC2Genesys	NETMGT	6000	100	6499	No
2	MR2-SBC2ITSP	PUBSIP	8000	100	8499	No
3	MR3_RemoteAgents	PUBSIP	9000	100	9499	No

3.11.2 Step 11b: Configure SIP Signaling Interfaces for Remote Agents

This step describes how to create a new SIP Signaling interface on the Untrusted Network Interface for the Remote Agents.

➤ **To configure SIP interfaces for a Remote Agent:**

1. Open the SIP Interface Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **SIP Interface Table**).
2. Configure a SIP interface for the LAN:

Parameter	Value
Index	3
Interface Name	RemoteAgents (arbitrary descriptive name)
Network Interface	PUBSIP
Application Type	SBC
UDP	5070
SRD	DefaultSRD

The configured SIP Interfaces Table, including the Remote Agents, is shown in the figure below:

Figure 3-41: Configured SIP Interfaces for Remote Agents in SIP Interface Table

The screenshot shows the 'SIP Interface Table' configuration page. It includes a table with columns: Index, Name, SRD, Network Interface, Application Type, UDP Port, TCP Port, TLS Port, Encapsulating Protocol, and Media Realm. Three entries are listed: Genesys (Index 1, Network Interface NETMGT), ITSP (Index 2, Network Interface PUBSIP), and RemoteAgents (Index 3, Network Interface PUBSIP). The RemoteAgents entry is highlighted in yellow.

Index	Name	SRD	Network Interface	Application Type	UDP Port	TCP Port	TLS Port	Encapsulating Protocol	Media Realm
1	Genesys	DefaultSRD (#0)	NETMGT	SBC	5060	0	0	No encapsulation	MR1-SBC2Genesys
2	ITSP	DefaultSRD (#0)	PUBSIP	SBC	5060	0	0	No encapsulation	MR2-SBC2ITSP
3	RemoteAgents	DefaultSRD (#0)	PUBSIP	SBC	5070	0	0	No encapsulation	MR3_RemoteAgents

3.11.3 Step 11c: Configure Remote (User) Agents IP Group


This step describes how to configure remote (User) agents IP Group. In the interoperability test topology, an IP User Group was configured for Remote (User) Agents registering from the WAN.

➤ **To configure an IP User Group:**

1. Open the IP Group Table page (**Configuration** tab > **VoIP** menu > **VoIP Network** > **IP Group Table**).
2. Configure an IP Group for the Remote Agents as follows:

Parameter	Value
Index	3
Type	User
Description	Remote Agents (arbitrary descriptive name)
SRD	DefaultSRD
Media Realm Name	MR3-RemoteAgents
IP Profile ID	MR3-RemoteAgents

Figure 3-42: Configure an IP Group for the Remote (User) Agents (Common Tab)

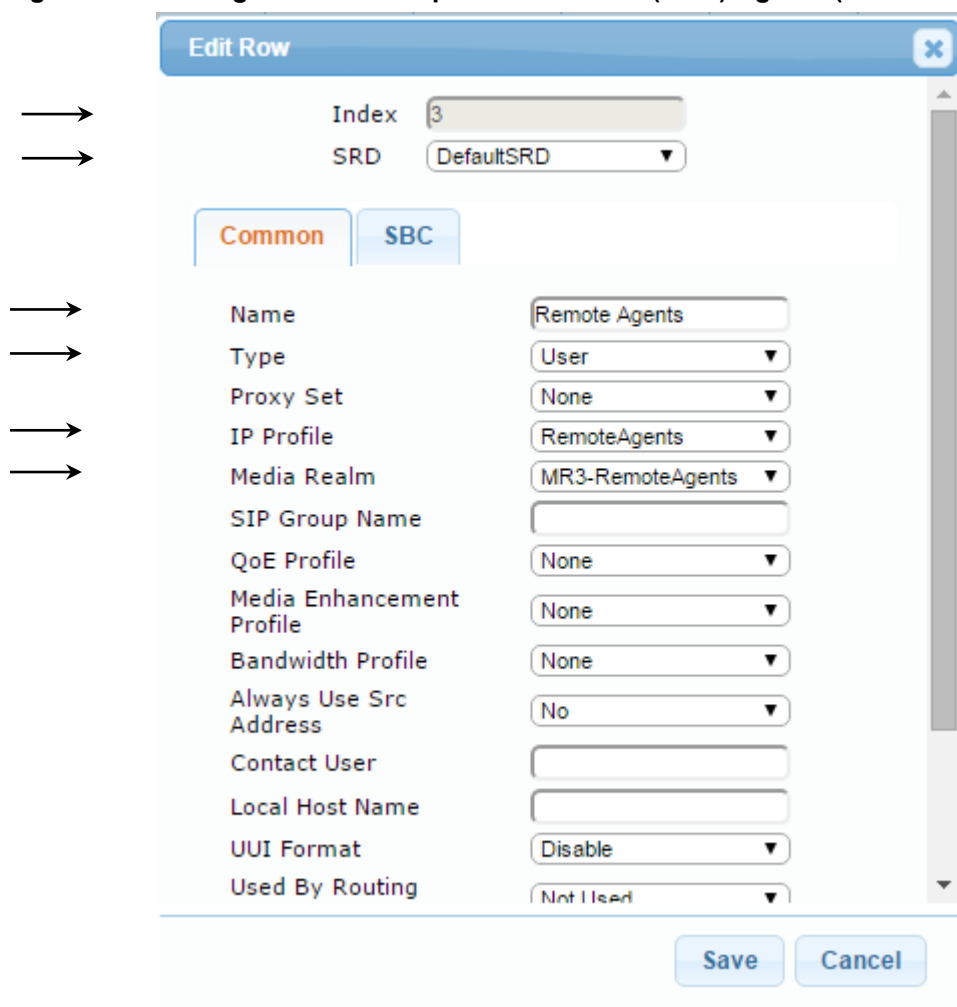

Edit Row

Index: 3

SRD: DefaultSRD

Common | SBC

Name: Remote Agents

Type: User

Proxy Set: None

IP Profile: RemoteAgents

Media Realm: MR3-RemoteAgents

SIP Group Name:

QoE Profile: None

Media Enhancement Profile: None

Bandwidth Profile: None

Always Use Src Address: No

Contact User:

Local Host Name:

UII Format: Disable

Used By Routing: Not Used

Save Cancel

Figure 3-43: Configure an IP Group for Remote User Agents (SBC Tab)

Edit Row

Index: 3
SRD: DefaultSRD

Common | **SBC**

SBC Operation Mode: Not Configured
Classify By Proxy Set: Disable
SBC Client Forking Mode: Sequential
Inbound Message Manipulation Set: -1
Outbound Message Manipulation Set: -1
Message Manipulation User-Defined String 1:
Message Manipulation User-Defined String 2:
Registration Mode: User Initiates Registr.
Max. Number of Registered Users: -1
Authentication Mode: User Authenticates
Authentication Method List:
Username:

Save Cancel

The configured IP Groups are shown in the figure below:

Figure 3-44: Configured IP Group for Remote Users in IP Group Table

IP Group Table											
▼ IP Group Table											
Add + Edit Delete Show / Hide ▼ All <input type="text" value="Search in table"/> <input type="button" value="Search"/>											
Index	Name	SRD	Type	SBC Operation Mode	Proxy Set	IP Profile	Media Realm	SIP Group Name	Classify By Proxy Set	Inbound Message Manipulation Set	Outbound Message Manipulation Set
1	Genesys	DefaultSR	Server	B2BUA	Genesys SIP	Genesys SIP	MR1-SBC2G		Enable	3	12
2	ITSP	DefaultSR	Server	B2BUA	ITSP	ITSP	MR2-SBC2IT		Enable	-1	1
3	Remote Age	DefaultSR	User	Not Configur	None	RemoteAger	MR3-Remote		Disable	-1	-1

3.11.4 Step 11d: Configure IP Profiles for Remote Agents

This step describes how to configure IP Profiles for the Remote (User) Agents.




Note: The IP Profile index values were assigned to the IP Groups in the previous step (see Section 3.5 on page 30).

➤ **To configure IP Profile for the Remote (User) Agent:**

1. Open the IP Profile Settings page (**Configuration** tab > **VoIP** > **Coders and Profiles** > **IP Profile Settings**).
2. Click **Add**.
3. Click the **Common** tab, and then configure the parameters as follows:

Parameter	Value
Index	3
Profile Name	Remote Users (arbitrary descriptive name)

Figure 3-45: Configure IP Profile for Remote Users (Common Tab)

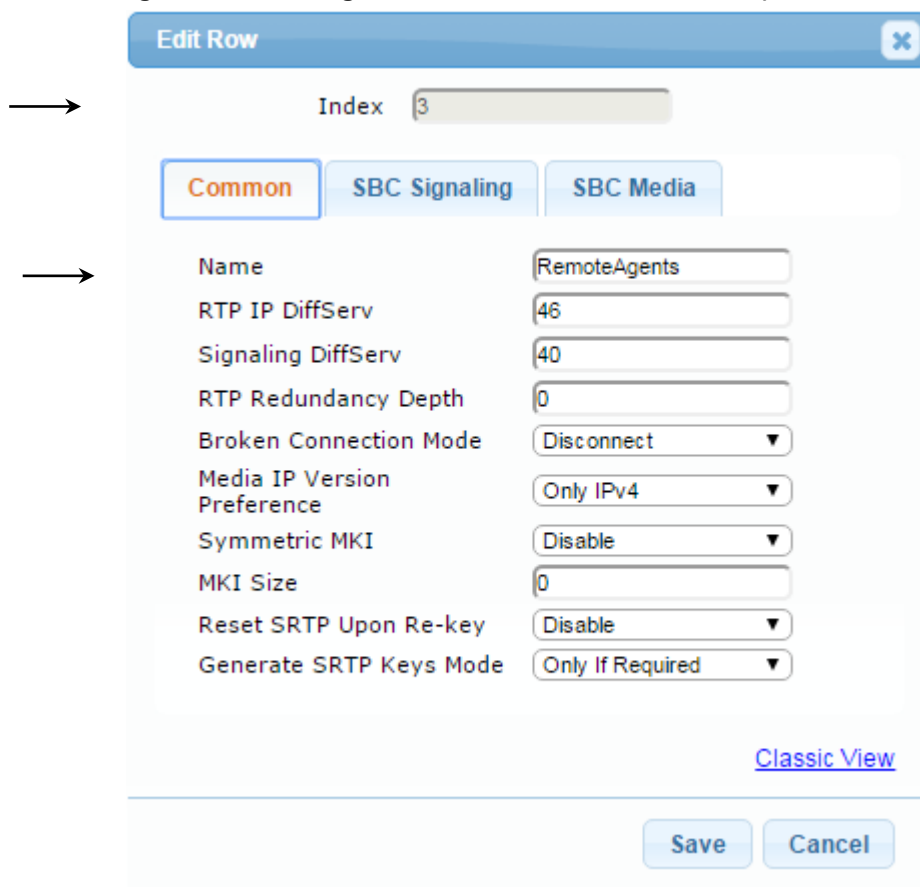



Note: Presently, no parameters require configuration on the **SBC** tab for the Remote Agents IP Profile. All parameters are set to their default values. The IP Profile is created for the purpose of future configuration only.

The configured IP Remote Agent Groups are shown in the figure below:

Figure 3-46: Configured IP Profiles in IP Profile Table

Index	Name
1	Genesys SIP Server
2	ITSP
3	RemoteAgents


3.11.5 Step 11e: Configure Classification Table for Remote Agents

This step describes how to configure the Classification table for Remote Agents. The Classification rules classify incoming SIP dialog-initiating requests to an IP Group from where the SIP dialog request was received. The identified IP Group is then used in the manipulation and routing processes. For Remote Users arriving on an interface with multiple IP Groups, the classification rules will determine the origination IP Group.

➤ **To configure IP Profile for the Remote (User) Agent:**

1. Open the Classification Table page (**Configuration** tab > **VoIP** > **SBC** > **Routing SBC** > **Classification Table**).
2. Click **Add**.
3. On the **Rule** tab, configure the parameters as follows:

Parameter	Value
Index	1
Classification Name	Remote Users (arbitrary descriptive name)
Source SIP Interface	RemoteAgents

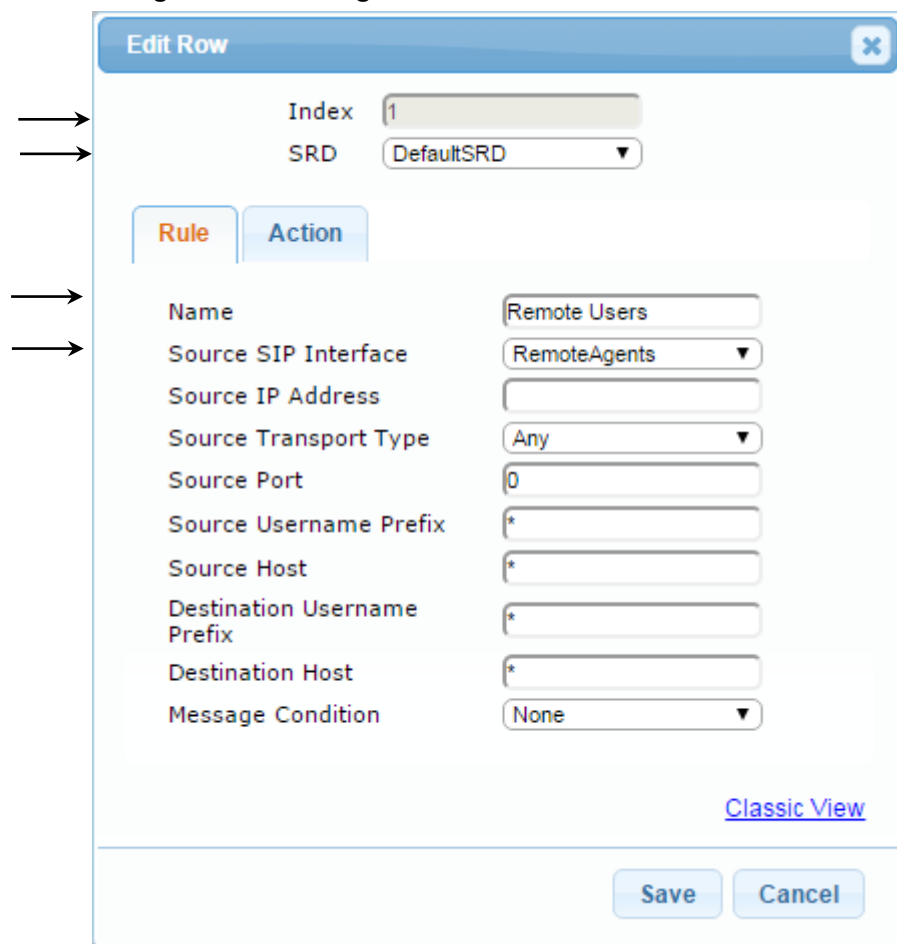Figure 3-47: Configure Rule Tab of the Classification Table


4. On the **Action** tab, configure the parameters as follows:

Parameter	Value
Source IP Group ID	Remote Agents
IP Profile	RemoteAgents

Figure 3-48: Configured IP Profiles in IP Profile Table

Edit Row

Index: 1

SRD: DefaultSRD

Rule | **Action**

Action Type: Allow

Destination Routing Policy: None

Source IP Group: Remote Agents

IP Profile: RemoteAgents

[Classic View](#)

Save Cancel

The configured IP Remote Agent Groups are shown in the figure below:

Figure 3-49: Configured Classification Rule for Remote (Users) Agents

Classification Table									
▼ Classification Table									
Add + Edit Delete Insert + Up ↑ Down ↓ Show / Hide									
All Search in table Search									
Index	Name	SRD	Source SIP Interface	Source Username Prefix	Source Host	Destination Username Prefix	Destination Host	Action Type	Source IP Group
1	Remote Users	DefaultSRD (#0)	RemoteAgents	*	*	*	*	Allow	Remote Agents

3.11.6 Step 11f: Configure IP-to-IP Call Routing Rules for Remote (User) Agent

This step describes how to configure additional IP-to-IP call routing rules that are required for routing calls between the Remote Users (classified to a particular IP Group via the Classification table in Section 3.11.5 on page 61) and the Genesys SIP Server.

The following IP-to-IP call routing rules were configured (see Section 3.8 on page 41):

- Terminate SIP OPTIONS messages on the SBC that are received from the LAN
- Calls from Genesys Contact Center to ITSP SIP Trunk
- Calls from ITSP SIP Trunk to Genesys Contact Center
- Trigger rules for handling SIP 3xx/REFER for local agents and external DNS

For the interoperability test topology, IP-to-IP routing rules were configured to route SIP messages between the Remote (User) Agents and the Genesys SIP Server, and to ensure that the messages are routed back to the correct user group to reach the intended agent.

➤ **To configure IP-to-IP routing rules:**

1. Open the IP-to-IP Routing Table page (**Configuration** tab > **VoIP** menu > **SBC** > **Routing SBC** > **IP-to-IP Routing Table**).
2. Configure a rule to route between the Remote Agent and the Genesys SIP Server:
 - a. Click **Add**.
 - b. Click the **Rule** tab, and then configure the parameters as follows:

Parameter	Value
Index	10
Route Name	RemoteAgents2Genesys (arbitrary descriptive name)
Source IP Group ID	Remote Agents

Figure 3-50: Configure IP-to-IP Routing Rule for Terminating RemoteAgents2Genesys – Rule Tab

→ Index: 10

→ Routing Policy: Default_SBCRoutingF

→ Rule | Action

Name: RemoteAgents2Genesys

Alternative Route Options: Route Row

Source IP Group: Remote Agents

Request Type: All

Source Username Prefix: *

Source Host: *

Destination Username Prefix: *

Destination Host: *

Message Condition: None

Call Trigger: Any

ReRoute IP Group: Any


[Classic View](#)

Save Cancel

3. Click the **Action** tab, configure the parameters as follows, and then click **Submit**.

Parameter	Value
Destination Type	IP Group
Destination IP Group ID	Genesys
Destination SIP Interface	Genesys

Figure 3-51: Configure IP-to-IP Routing Rule for Terminating RemoteAgents2Genesys – Action Tab

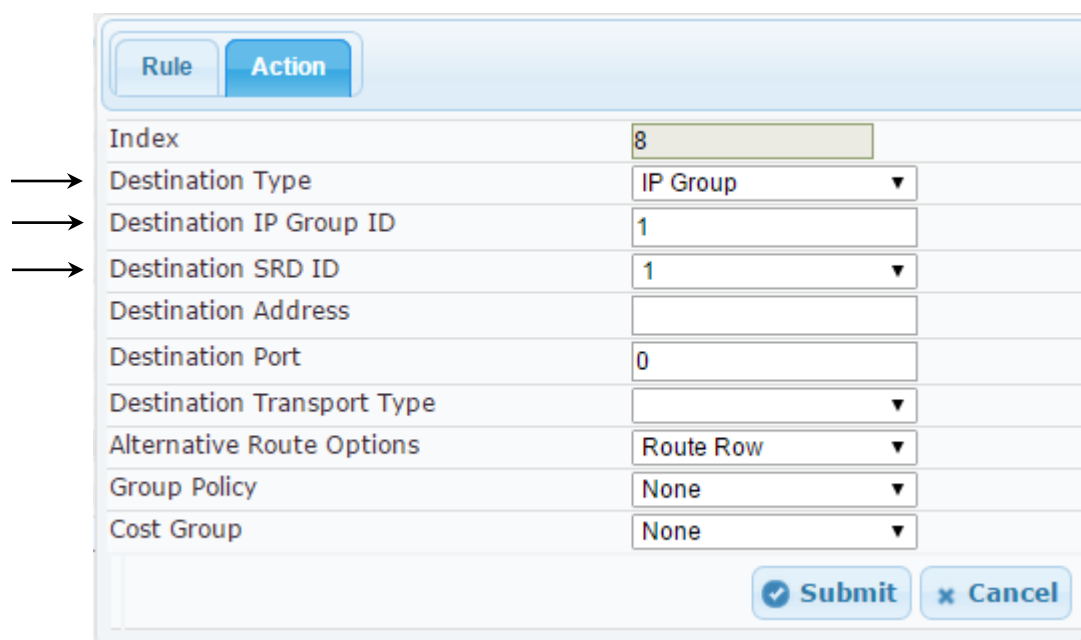

Rule Action	
Index	8
Destination Type	IP Group ▼
Destination IP Group ID	1
Destination SRD ID	1 ▼
Destination Address	
Destination Port	0
Destination Transport Type	▼
Alternative Route Options	Route Row ▼
Group Policy	None ▼
Cost Group	None ▼

4. Configure a rule to route calls from the Genesys Contact Center to the Remote User Agent Group. Note that in this case the rule is inserted in the IP-to-IP Routing table above the routing rule that already exists for calls from IP Group 1 (Genesys) toward the ITSP IP Group 2. For the Genesys to Remote Agent routing rule, the destination number is used to differentiate these calls from those calls that will be routed to the ITSP. For calls in the Remote Agent group, the SBC will determine the next destination from the Address of Record (AOR) table.
 - a. Select Index 1 (Genesys2ITSP route), and then click **Insert +**.
 - b. Click the **Rule** tab, configure the parameters as follows, and then click **Submit**.

Parameter	Value
Index	6
Route Name	Genesys2RemoteAgents (arbitrary descriptive name)
Source IP Group ID	Genesys
Destination Username Prefix	7138675309*

Figure 3-52: Configure IP-to-IP Routing Rule for Genesys to Remote Agent Group – Rule tab

Edit Row

Index: 6
Routing Policy: Default_SBCRoutingF

Rule | Action

Name: Genesys2RemoteAgents
Alternative Route Options: Route Row
Source IP Group: Genesys
Request Type: All
Source Username Prefix: *
Source Host: *
Destination Username Prefix: 7138675309*
Destination Host: *
Message Condition: None
Call Trigger: Any
ReRoute IP Group: Any


[Classic View](#)

Save Cancel

5. Click the **Action** tab, and then configure the parameters as follows:

Parameter	Value
Destination Type	IP Group
Destination IP Group ID	Remote Agents
Destination SRD ID	RemoteAgents

Figure 3-53: Configure IP-to-IP Routing Rule for Genesys to SIP Trunk – Action tab

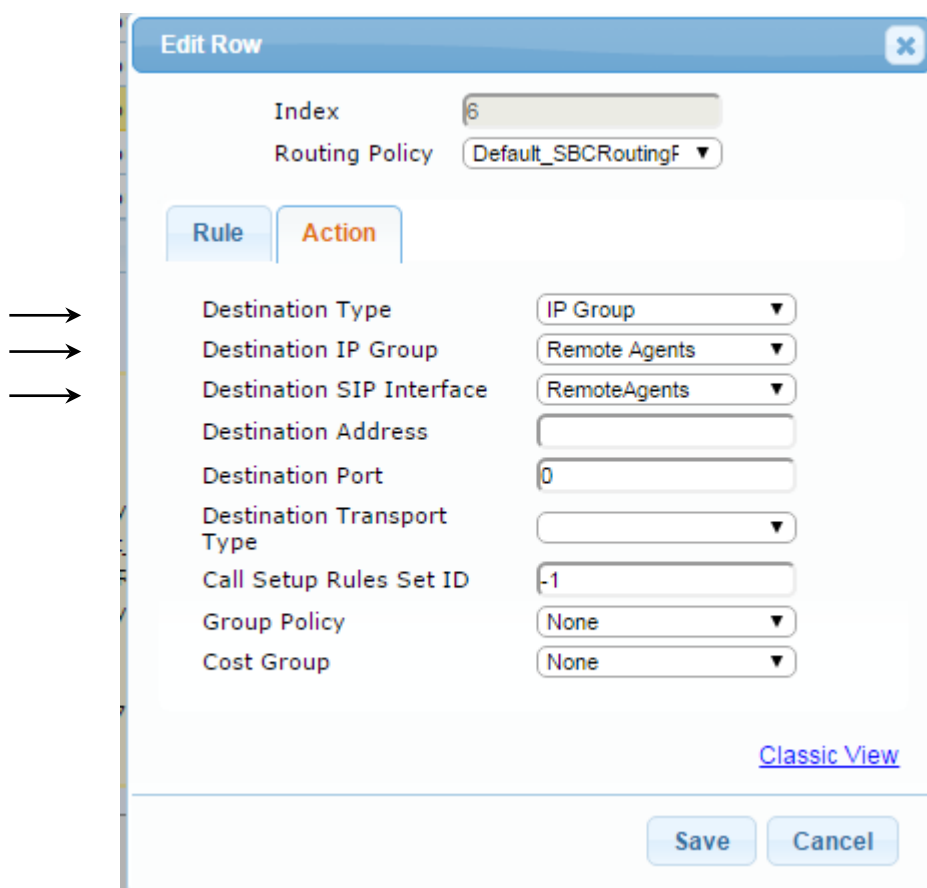

Edit Row

Index: 6
Routing Policy: Default_SBCRoutingF

Rule **Action**

Destination Type: IP Group
Destination IP Group: Remote Agents
Destination SIP Interface: RemoteAgents
Destination Address:
Destination Port: 0
Destination Transport Type:
Call Setup Rules Set ID: -1
Group Policy: None
Cost Group: None

[Classic View](#)

Save Cancel

The configured IP-to-IP routing rules including rules for Remote Agents are shown in the figure below.

Figure 3-54: Configured IP-to-IP Routing Rules in IP-to-IP Routing Table

IP-to-IP Routing Table											
<div> Add + Edit Delete Insert + Up ↑ Down ↓ Show / Hide </div> <div> All Search in table Search </div>											
Index	Name	Routing Policy	Alternative Route Options	Source IP Group	Request Type	Source Username Prefix	Destination Username Prefix	Destination Type	Destination IP Group	Destination SIP Interface	Destination Address
1	OPTIONS	Default_SBCRo	Route Row	Any	OPTIONS	*	*	Dest Address	None	None	internal
3	3xx Move	Default_SBCRo	Route Row	ITSP	All	*	*	IP Group	Genesys	Genesys	
4	Windstream2Ge	Default_SBCRo	Route Row	ITSP	All	*	*	IP Group	Genesys	Genesys	
6	Genesys2Remo	Default_SBCRo	Route Row	Genesys	All	*	7138675309*	IP Group	Remote Agents	RemoteAgents	
8	Genesys2ITSP	Default_SBCRo	Route Row	Genesys	All	*	*	IP Group	ITSP	ITSP	
10	RemoteAgents2	Default_SBCRo	Route Row	Remote Agents	All	*	*	IP Group	Genesys	Genesys	
<div> Page 1 of 1 10 View 1 - 6 of 6 </div>											



Note: The routing configuration may change according to your specific deployment topology. For example, the deployment specification may indicate a particular set of numbers that should be routed to the User group; however, a particular deployment may handle the routing of Remote Agents over a different trunk from the Genesys SIP Server or may require the use of other criteria/filters in the routing table.


3.12 Step 12: Reset the SBC

After completing the configuration of the SBC, save ("burn") the configuration to the SBC's flash memory with a reset for the settings to take effect.

➤ **To save the configuration to flash memory:**

1. Open the Maintenance Actions page (**Maintenance** tab > **Maintenance** menu > **Maintenance Actions**).

Figure 3-55: Resetting the SBC

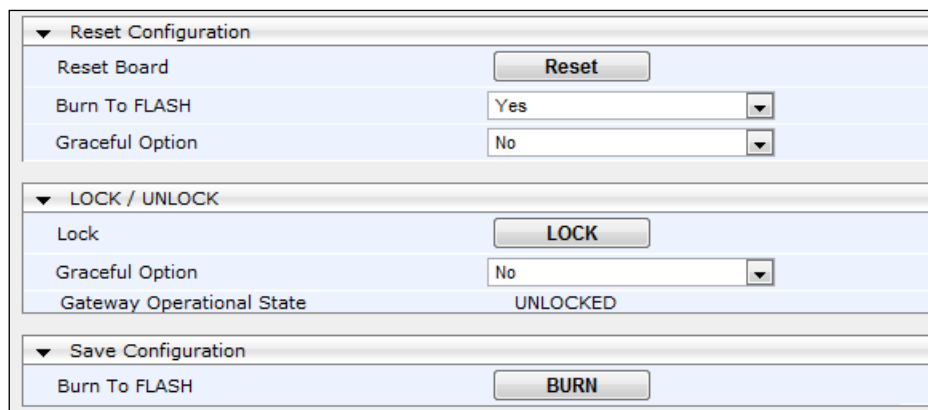

▼ Reset Configuration	
Reset Board	<input type="button" value="Reset"/>
Burn To FLASH	Yes ▼
Graceful Option	No ▼
▼ LOCK / UNLOCK	
Lock	<input type="button" value="LOCK"/>
Graceful Option	No ▼
Gateway Operational State	UNLOCKED
▼ Save Configuration	
Burn To FLASH	<input type="button" value="BURN"/>

2. Make sure that the 'Burn to FLASH' field is set to **Yes** (default).
3. Click the **Reset** button.

A AudioCodes *ini* File

This appendix shows the *ini* configuration file of the SBC, corresponding to the Web-based configuration described in Section 3 on page 19.



Note: To load and save an *ini* file, use the Configuration File page (**Maintenance** tab > **Software Update** menu > **Configuration File**).

```
;*****
;** Ini File **
;*****

;Board: Mediant VE SBC
;HW Board Type: 73 FK Board Type: 79
;Serial Number: 137709054472906
;Product Key:
;Slot Number: 1
;Software Version: 7.00A.049.003
;DSP Software Version: SOFTDSP => 700.44
;Board IP Address: 10.38.5.39
;Board Subnet Mask: 255.255.255.0
;Board Default Gateway: 10.38.5.1
;Ram size: 3832M Flash size: 0M
;Num of DSP Cores: 0 Num DSP Channels: 0
;Profile: NONE
;;;Key features;;Board Type: Mediant VE SBC ;Channel Type: DspCh=30
IPMediaDspCh=30 ;HA ;Coders: G723 G729 G728 NETCODER GSM-FR GSM-EFR AMR
EVRC-QCELP G727 ILBC EVRC-B AMR-WB G722 EG711 MS_RTA_NB MS_RTA_WB SILK_NB
SILK_WB SPEEX_NB SPEEX_WB OPUS_NB OPUS_WB ;DATA features: ;QOE features:
VoiceQualityMonitoring MediaEnhancement ;DSP Voice features: RTCP-XR
;Control Protocols: FEU=10 MGCP SIP SBC=20 ;Default features;;Coders: G711
G726;

;MAC Addresses in use:
;-----
;GROUP_1 - 00:0c:29:21:73:b5
;GROUP_2 - 00:0c:29:21:73:bf
;-----

[SYSTEM Params]

SyslogServerIP = 10.38.5.70
EnableSyslog = 1
ENABLEPARAMETERSMONITORING = 1
ActivityListToLog = 'pvc', 'afl', 'dr', 'fb', 'swu', 'naa', 'spc', 'll',
'ae'
DebugRecordingDestIP = 10.38.5.70
;VpFileLastUpdateTime is hidden but has non-default value
NTPServerIP = '0.0.0.0'
;LastConfigChangeTime is hidden but has non-default value
;PM_gwINVITEDialogs is hidden but has non-default value
;PM_gwSUBSCRIBEDialogs is hidden but has non-default value
;PM_gwSBCMediaLegs is hidden but has non-default value
;PM_gwSBCTranscodingSessions is hidden but has non-default value
```

[BSP Params]

```
PCMLawSelect = 3
AuthorizedTPNCPServers_0 = 0.0.0.0
AuthorizedTPNCPServers_1 = 0.0.0.0
AuthorizedTPNCPServers_2 = 0.0.0.0
AuthorizedTPNCPServers_3 = 78.75.78.85
UdpPortSpacing = 5
EnterCpuOverloadPercent = 99
ExitCpuOverloadPercent = 95
```

[ControlProtocols Params]

```
AdminStateLockControl = 0
```

[MGCP Params]**[MEGACO Params]**

```
EP_Num_0 = 0
EP_Num_1 = 1
EP_Num_2 = 1
EP_Num_3 = 0
EP_Num_4 = 0
```

[Voice Engine Params]**[WEB Params]**

```
LogoWidth = '145'
```

[SIP Params]

```
GWDEBUGLEVEL = 5
;ISPRACKREQUIRED is hidden but has non-default value
ENABLEEARLYMEDIA = 0
ASSERTEDIDMODE = 0
USETELURIFORASSERTEDID = 0
ENABLECONTACTRESTRICTION = 0
MSLDAPPRIMARYKEY = 'telephoneNumber'
ENERGYDETECTORCMD = 104
ANSWERDETECTORCMD = 12582952
HTTPPROXYSYSLOGDEBUGLEVEL = 5
;GWAPPCONFIGURATIONVERSION is hidden but has non-default value
```

[IPsec Params]**[SNMP Params]****[PhysicalPortsTable]**

```
FORMAT PhysicalPortsTable_Index = PhysicalPortsTable_Port,
PhysicalPortsTable_Mode, PhysicalPortsTable_SpeedDuplex,
PhysicalPortsTable_PortDescription, PhysicalPortsTable_GroupMember,
PhysicalPortsTable_GroupStatus;
PhysicalPortsTable 0 = "GE_1", 1, 4, "User Port #0", "GROUP_1", "Active";
PhysicalPortsTable 1 = "GE_2", 1, 4, "User Port #1", "GROUP_2", "Active";
```



```
[ \PhysicalPortsTable ]

[ EtherGroupTable ]

FORMAT EtherGroupTable_Index = EtherGroupTable_Group, EtherGroupTable_Mode,
EtherGroupTable_Member1, EtherGroupTable_Member2;
EtherGroupTable 0 = "GROUP_1", 1, "GE_1", "";
EtherGroupTable 1 = "GROUP_2", 1, "GE_2", "";

[ \EtherGroupTable ]

[ DeviceTable ]

FORMAT DeviceTable_Index = DeviceTable_VlanID,
DeviceTable_UnderlyingInterface, DeviceTable_DeviceName,
DeviceTable_Tagging;
DeviceTable 0 = 1, "GROUP_1", "trusted", 0;
DeviceTable 1 = 254, "GROUP_2", "untrusted", 0;

[ \DeviceTable ]

[ InterfaceTable ]

FORMAT InterfaceTable_Index = InterfaceTable_ApplicationTypes,
InterfaceTable_InterfaceMode, InterfaceTable_IPAddress,
InterfaceTable_PrefixLength, InterfaceTable_Gateway,
InterfaceTable_InterfaceName, InterfaceTable_PrimaryDNSServerIPAddress,
InterfaceTable_SecondaryDNSServerIPAddress,
InterfaceTable_UnderlyingDevice;
InterfaceTable 0 = 6, 10, 10.38.5.39, 24, 10.38.5.1, "NETMGT", 0.0.0.0,
0.0.0.0, "trusted";
InterfaceTable 1 = 5, 10, 173.227.254.124, 26, 173.227.254.65, "PUBSIP",
0.0.0.0, 0.0.0.0, "untrusted";

[ \InterfaceTable ]

[ ACCESSLIST ]

FORMAT ACCESSLIST_Index = ACCESSLIST_Source_IP, ACCESSLIST_Source_Port,
ACCESSLIST_PrefixLen, ACCESSLIST_Start_Port, ACCESSLIST_End_Port,
ACCESSLIST_Protocol, ACCESSLIST_Use_Specific_Interface,
ACCESSLIST_Interface_ID, ACCESSLIST_Packet_Size, ACCESSLIST_Byte_Rate,
ACCESSLIST_Byte_Burst, ACCESSLIST_Allow_Type;
ACCESSLIST 0 = "213.213.83.147", 0, 32, 5060, 5060, "SIP", 1, "PUBSIP", 0,
0, 0, "allow";
ACCESSLIST 1 = "50.52.146.54", 0, 32, 0, 65535, "Any", 1, "PUBSIP", 0, 0,
0, "Allow";
ACCESSLIST 2 = "0.0.0.0", 0, 0, 6000, 65535, "RTP", 1, "PUBSIP", 0, 0, 0,
"allow";
ACCESSLIST 3 = "0.0.0.0", 0, 0, 0, 65535, "Any", 1, "PUBSIP", 0, 0, 0,
"Block";

[ \ACCESSLIST ]

[ DspTemplates ]
```

```
FORMAT DspTemplates_Index = DspTemplates_DspTemplateName,  
DspTemplates_DspResourcesPercentage;  
DspTemplates 0 = 0, 100;  
  
[ \DspTemplates ]  
  
[ WebUsers ]  
  
FORMAT WebUsers_Index = WebUsers_Username, WebUsers_Password,  
WebUsers_Status, WebUsers_PwAgeInterval, WebUsers_SessionLimit,  
WebUsers_SessionTimeout, WebUsers_BlockTime, WebUsers_UserLevel,  
WebUsers_PwNonce;  
WebUsers 0 = "Admin",  
"$1$zKj7+P7ms+Hgt+Hus+3t67jou+nv0IPSGtbdgN/Qio/b29yP18fBwsORk5WWy8jCw8zLx89  
kZ2AzPGNnZjE/Mm4=", 1, 0, 2, 15, 60, 200,  
"412aa6dc7ff09cafc2487821e3cf97f7";  
WebUsers 1 = "User",  
"$1$U2BiMTJhaDw+az5tPGpTVlYAXFEAUllRWlIIIVFdcFhITrkZFQE5OSk9NHkVHHuHjtrbmsOO  
xvrqz77206rukoqM=", 1, 0, 2, 15, 60, 50,  
"7538d721e18268bc6e7222ec61221e6f";  
  
[ \WebUsers ]  
  
[ TLSContexts ]  
  
FORMAT TLSContexts_Index = TLSContexts_Name, TLSContexts_TLSVersion,  
TLSContexts_ServerCipherString, TLSContexts_ClientCipherString,  
TLSContexts_OcspEnable, TLSContexts_OcspServerPrimary,  
TLSContexts_OcspServerSecondary, TLSContexts_OcspServerPort,  
TLSContexts_OcspDefaultResponse;  
TLSContexts 0 = "default", 0, "RC4:EXP", "ALL:!ADH", 0, , , 2560, 0;  
  
[ \TLSContexts ]  
  
[ IpProfile ]  
  
FORMAT IpProfile_Index = IpProfile_ProfileName, IpProfile_IpPreference,  
IpProfile_CodersGroupID, IpProfile_IsFaxUsed, IpProfile_JitterBufMinDelay,  
IpProfile_JitterBufOptFactor, IpProfile_IPDiffServ,  
IpProfile_SigIPDiffServ, IpProfile_SCE, IpProfile_RTPRedundancyDepth,  
IpProfile_RemoteBaseUDPPort, IpProfile_CNGmode, IpProfile_VxxTransportType,  
IpProfile_NSEmode, IpProfile_IsDTMFUsed, IpProfile_PlayRBTone2IP,  
IpProfile_EnableEarlyMedia, IpProfile_ProgressIndicator2IP,  
IpProfile_EnableEchoCanceller, IpProfile_CopyDest2RedirectNumber,  
IpProfile_MediaSecurityBehaviour, IpProfile_CallLimit,  
IpProfile_DisconnectOnBrokenConnection, IpProfile_FirstTxDtmfOption,  
IpProfile_SecondTxDtmfOption, IpProfile_RxDTMFOption, IpProfile_EnableHold,  
IpProfile_InputGain, IpProfile_VoiceVolume, IpProfile_AddIEInSetup,  
IpProfile_SBCExtensionCodersGroupID, IpProfile_MediaIPVersionPreference,  
IpProfile_TranscodingMode, IpProfile_SBCAllowedMediaTypes,  
IpProfile_SBCAllowedCodersGroupID, IpProfile_SBCAllowedVideoCodersGroupID,  
IpProfile_SBCAllowedCodersMode, IpProfile_SBCMediaSecurityBehaviour,  
IpProfile_SBCRFC2833Behavior, IpProfile_SBCAlternativeDTMFMethod,  
IpProfile_SBCAssertIdentity, IpProfile_AMDSensitivityParameterSuit,  
IpProfile_AMDSensitivityLevel, IpProfile_AMDMaxGreetingTime,  
IpProfile_AMDMaxPostSilenceGreetingTime, IpProfile_SBCDiversiionMode,  
IpProfile_SBCHistoryInfoMode, IpProfile_EnableQSIGTunneling,
```

```

IpProfile_SBCFaxCodersGroupID, IpProfile_SBCFaxBehavior,
IpProfile_SBCFaxOfferMode, IpProfile_SBCFaxAnswerMode,
IpProfile_SbcPrackMode, IpProfile_SBCSessionExpiresMode,
IpProfile_SBCRemoteUpdateSupport, IpProfile_SBCRemoteReinviteSupport,
IpProfile_SBCRemoteDelayedOfferSupport, IpProfile_SBCRemoteReferBehavior,
IpProfile_SBCRemote3xxBehavior, IpProfile_SBCRemoteMultiple18xSupport,
IpProfile_SBCRemoteEarlyMediaResponseType,
IpProfile_SBCRemoteEarlyMediaSupport, IpProfile_EnableSymmetricMKI,
IpProfile_MKISize, IpProfile_SBCEnforceMKISize,
IpProfile_SBCRemoteEarlyMediaRTP, IpProfile_SBCRemoteSupportsRFC3960,
IpProfile_SBCRemoteCanPlayRingback, IpProfile_EnableEarly183,
IpProfile_EarlyAnswerTimeout, IpProfile_SBC2833DTMFPayloadType,
IpProfile_SBCUserRegistrationTime, IpProfile_ResetSRTPStateUponRekey,
IpProfile_AmdMode, IpProfile_SBCReliableHeldToneSource,
IpProfile_GenerateSRTPKeys, IpProfile_SBCPlayHeldTone,
IpProfile_SBCRemoteHoldFormat, IpProfile_SBCRemoteReplacesBehavior,
IpProfile_SBCSDPptimeAnswer, IpProfile_SBCPreferredPTIME,
IpProfile_SBCUseSilenceSupp, IpProfile_SBCRTPRedundancyBehavior,
IpProfile_SBCPlayRBTToTransferee, IpProfile_SBCRTCPMode,
IpProfile_SBCJitterCompensation,
IpProfile_SBCRemoteRenegotiateOnFaxDetection, IpProfile_JitterBufMaxDelay,
IpProfile_SBCUserBehindUdpNATRegistrationTime,
IpProfile_SBCUserBehindTcpNATRegistrationTime,
IpProfile_SBCSDPHandlerRTCPAttribute,
IpProfile_SBCRemoveCryptoLifetimeInSDP, IpProfile_SBCIceMode,
IpProfile_SBCRTCPMux, IpProfile_SBCMediaSecurityMethod,
IpProfile_SBCHandleXDetect, IpProfile_SBCRTCPFeedback,
IpProfile_SBCRemoteRepresentationMode, IpProfile_SBCKeepVIAHeaders,
IpProfile_SBCKeepRoutingHeaders, IpProfile_SBCKeepUserAgentHeader,
IpProfile_SBCRemoteMultipleEarlyDialogs,
IpProfile_SBCRemoteMultipleAnswersMode, IpProfile_SBCDirectMediaTag,
IpProfile_SBCAdaptRFC2833BWToVoiceCoderBW;
IpProfile 1 = "Genesys", 1, 0, 0, 10, 10, 46, 40, 0, 0, 0, 0, 2, 0, 0, 0,
0, -1, 1, 0, 0, -1, 1, 4, -1, 1, 1, 0, 0, "", -1, 0, 0, "", 1, -1, 0, 0, 0,
0, 0, 0, 8, 300, 400, 0, 0, 0, -1, 0, 0, 1, 3, 0, 2, 2, 1, 0, 0, 1, 0, 1,
0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
300, -1, -1, 0, 0, 0, 0, 0, 0, 0, -1, -1, -1, -1, -1, 0, "", 0;
IpProfile 2 = "ITSP", 1, 0, 0, 10, 10, 46, 40, 0, 0, 0, 0, 2, 0, 0, 0, 0, -
1, 1, 0, 0, -1, 1, 4, -1, 1, 1, 0, 0, "", 2, 0, 0, "", -1, -1, 2, 0, 0, 0,
0, 0, 8, 300, 400, 0, 0, 0, -1, 0, 0, 1, 3, 0, 1, 2, 0, 3, 2, 1, 0, 1, 0,
0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
300, -1, -1, 0, 0, 0, 0, 0, 0, 0, -1, -1, -1, -1, -1, 0, "", 0;
IpProfile 3 = "RemoteAgents", 1, 0, 0, 10, 10, 46, 40, 0, 0, 0, 0, 2, 0, 0, 0,
0, 0, -1, 1, 0, 0, -1, 1, 4, -1, 1, 1, 0, 0, "", -1, 0, 0, "", -1, -1, 0,
0, 0, 0, 0, 8, 300, 400, 0, 0, 0, -1, 0, 0, 1, 3, 0, 2, 2, 1, 0, 0, 1,
0, 1, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
0, 0, 300, -1, -1, 0, 0, 0, 0, 0, 0, 0, -1, -1, -1, -1, -1, 0, "", 0;

[ \IpProfile ]

[ CpMediaRealm ]

FORMAT CpMediaRealm_Index = CpMediaRealm_MediaRealmName,
CpMediaRealm_IPv4IF, CpMediaRealm_IPv6IF, CpMediaRealm_PortRangeStart,
CpMediaRealm_MediaSessionLeg, CpMediaRealm_PortRangeEnd,
CpMediaRealm_IsDefault, CpMediaRealm_QoeProfile, CpMediaRealm_BWProfile;
CpMediaRealm 1 = "MR1-SBC2Genesys", "NETMGMT", "", 6000, 100, 6499, 1, "",
"";
CpMediaRealm 2 = "MR2-SBC2ITSP", "PUBSIP", "", 10000, 100, 10499, 0, "",
"";

```

```
CpMediaRealm 3 = "MR3_RemoteAgents", "PUBSIP", "", 9000, 100, 9499, 0, "",
"";

[ \CpMediaRealm ]

[ SBCRoutingPolicy ]

FORMAT SBCRoutingPolicy_Index = SBCRoutingPolicy_Name,
SBCRoutingPolicy_LCReEnable, SBCRoutingPolicy_LCRAverageCallLength,
SBCRoutingPolicy_LCRDefaultCost, SBCRoutingPolicy_LdapServerGroupName;
SBCRoutingPolicy 0 = "Default_SBCRoutingPolicy", 0, 1, 0, "";

[ \SBCRoutingPolicy ]

[ SRD ]

FORMAT SRD_Index = SRD_Name, SRD_BlockUnRegUsers, SRD_MaxNumOfRegUsers,
SRD_EnableUnAuthenticatedRegistrations, SRD_SharingPolicy,
SRD_UsedByRoutingServer, SRD_SBCOperationMode, SRD_SBCRoutingPolicyName,
SRD_SBCDialPlanName;
SRD 0 = "DefaultSRD", 0, -1, 1, 0, 0, 0, "Default_SBCRoutingPolicy", "";

[ \SRD ]

[ SIPInterface ]

FORMAT SIPInterface_Index = SIPInterface_InterfaceName,
SIPInterface_NetworkInterface, SIPInterface_ApplicationType,
SIPInterface_UDPPort, SIPInterface_TCPPort, SIPInterface_TLSPort,
SIPInterface_SRDName, SIPInterface_MessagePolicyName,
SIPInterface_TLSContext, SIPInterface_TLSMutualAuthentication,
SIPInterface_TCPKeepaliveEnable,
SIPInterface_ClassificationFailureResponseType,
SIPInterface_PreClassificationManSet, SIPInterface_EncapsulatingProtocol,
SIPInterface_MediaRealm, SIPInterface_SBCDirectMedia,
SIPInterface_BlockUnRegUsers, SIPInterface_MaxNumOfRegUsers,
SIPInterface_EnableUnAuthenticatedRegistrations,
SIPInterface_UsedByRoutingServer;
SIPInterface 1 = "Genesys", "NETMGT", 2, 5060, 0, 0, "DefaultSRD", "",
"default", -1, 0, 500, -1, 0, "MR1-SBC2Genesys", 0, -1, -1, -1, 0;
SIPInterface 2 = "ITSP", "PUBSIP", 2, 5060, 0, 0, "DefaultSRD", "",
"default", -1, 0, 500, -1, 0, "MR2-SBC2ITSP", 0, -1, -1, -1, 0;
SIPInterface 3 = "RemoteAgents", "PUBSIP", 2, 5070, 0, 0, "DefaultSRD", "",
"default", -1, 0, 500, -1, 0, "MR3_RemoteAgents", 0, -1, -1, -1, 0;

[ \SIPInterface ]

[ ProxySet ]

FORMAT ProxySet_Index = ProxySet_ProxyName, ProxySet_EnableProxyKeepAlive,
ProxySet_ProxyKeepAliveTime, ProxySet_ProxyLoadBalancingMethod,
ProxySet_IsProxyHotSwap, ProxySet_SRDName, ProxySet_ClassificationInput,
ProxySet_TLSContextName, ProxySet_ProxyRedundancyMode,
ProxySet_DNSResolveMethod, ProxySet_KeepAliveFailureResp,
ProxySet_GWIPv4SIPInterfaceName, ProxySet_SBCIPv4SIPInterfaceName,
ProxySet_SASIPv4SIPInterfaceName, ProxySet_GWIPv6SIPInterfaceName,
ProxySet_SBCIPv6SIPInterfaceName, ProxySet_SASIPv6SIPInterfaceName;
```

```

ProxySet 0 = "ProxySet_0", 0, 60, 0, 0, "DefaultSRD", 0, "", -1, -1, "",
"", "Genesys", "", "", "", "";
ProxySet 1 = "Genesys SIP Server", 1, 60, 0, 0, "DefaultSRD", 0, "", -1, -
1, "", "", "Genesys", "", "", "", "";
ProxySet 2 = "ITSP", 1, 60, 0, 0, "DefaultSRD", 0, "", -1, -1, "", "",
"ITSP", "", "", "", "";

[ \ProxySet ]

[ IPGroup ]

FORMAT IPGroup_Index = IPGroup_Type, IPGroup_Name, IPGroup_ProxySetName,
IPGroup_SIPGroupName, IPGroup_ContactUser, IPGroup_SipReRoutingMode,
IPGroup_AlwaysUseRouteTable, IPGroup_SRDName, IPGroup_MediaRealm,
IPGroup_ClassifyByProxySet, IPGroup_ProfileName, IPGroup_MaxNumOfRegUsers,
IPGroup_InboundManSet, IPGroup_OutboundManSet, IPGroup_RegistrationMode,
IPGroup_AuthenticationMode, IPGroup_MethodList,
IPGroup_EnableSBCCClientForking, IPGroup_SourceUriInput,
IPGroup_DestUriInput, IPGroup_ContactName, IPGroup_Username,
IPGroup_Password, IPGroup_UIFormat, IPGroup_QOEProfile, IPGroup_BWProfile,
IPGroup_MediaEnhancementProfile, IPGroup_AlwaysUseSourceAddr,
IPGroup_MsgManUserDef1, IPGroup_MsgManUserDef2, IPGroup_SIPConnect,
IPGroup_SBCPSAPMode, IPGroup_DTLSContext, IPGroup_CreatedByRoutingServer,
IPGroup_UsedByRoutingServer, IPGroup_SBCOperationMode,
IPGroup_SBCRouteUsingRequestURIPort, IPGroup_SBCKeepOriginalCallID,
IPGroup_SBCDialPlanName;
IPGroup 0 = 0, "Default_IPG", "ProxySet_0", "", "", -1, 0, "DefaultSRD",
"", 1, "", -1, -1, -1, 0, 0, "", 0, -1, -1, "", "", "$1$gQ==", 0, "", "",
"", 0, "", "", 0, 0, "", 0, 0, -1, 0, 0, "";
IPGroup 1 = 0, "Genesys", "Genesys SIP Server", "", "", -1, 0,
"DefaultSRD", "MR1-SBC2Genesys", 1, "Genesys", -1, 2, 1, 0, 0, "", 0, -1, -
1, "", "", "$1$gQ==", 0, "", "", "", 0, "", "", 0, 0, 0, 0, 0, 0,
"";
IPGroup 2 = 0, "ITSP", "ITSP", "", "", -1, 0, "DefaultSRD", "MR2-SBC2ITSP",
1, "ITSP", -1, -1, 0, 0, 0, "", 0, -1, -1, "", "", "$1$gQ==", 0, "", "",
"", 0, "", "", 0, 0, "", 0, 0, 0, 0, 0, 0, "";
IPGroup 3 = 1, "Remote Agents", "", "", "", -1, 0, "DefaultSRD",
"MR3_RemoteAgents", 0, "RemoteAgents", -1, -1, -1, 0, 0, "", 0, -1, -1, "",
"", "$1$gQ==", 0, "", "", "", 0, "", "", 0, 0, 0, 0, 0, 0, "";

[ \IPGroup ]

[ ProxyIp ]

FORMAT ProxyIp_Index = ProxyIp_ProxySetId, ProxyIp_ProxyIpIndex,
ProxyIp_IpAddress, ProxyIp_TransportType;
ProxyIp 0 = "2", 1, "213.213.83.147", 0;
ProxyIp 1 = "1", 1, "10.38.5.107", 0;

[ \ProxyIp ]

[ Account ]

FORMAT Account_Index = Account_ServedTrunkGroup, Account_ServedIPGroupName,
Account_ServingIPGroupName, Account_Username, Account_Password,
Account_HostName, Account_Register, Account_ContactUser,
Account_ApplicationType;
Account 0 = -1, "ITSP", "Genesys", "genesys", "$1$S3p+fno=", "", 0, "", 2;

```

```
[ \Account ]
```

```
[ IP2IPRouting ]
```

```
FORMAT IP2IPRouting_Index = IP2IPRouting_RouteName,  
IP2IPRouting_RoutingPolicyName, IP2IPRouting_SrcIPGroupName,  
IP2IPRouting_SrcUsernamePrefix, IP2IPRouting_SrcHost,  
IP2IPRouting_DestUsernamePrefix, IP2IPRouting_DestHost,  
IP2IPRouting_RequestType, IP2IPRouting_MessageConditionName,  
IP2IPRouting_ReRouteIPGroupName, IP2IPRouting_Trigger,  
IP2IPRouting_CallSetupRulesSetId, IP2IPRouting_DestType,  
IP2IPRouting_DestIPGroupName, IP2IPRouting_DestSIPInterfaceName,  
IP2IPRouting_DestAddress, IP2IPRouting_DestPort,  
IP2IPRouting_DestTransportType, IP2IPRouting_AltRouteOptions,  
IP2IPRouting_GroupPolicy, IP2IPRouting_CostGroup, IP2IPRouting_DestTags,  
IP2IPRouting_SrcTags;  
IP2IPRouting 0 = "OPTIONS", "Default_SBCRoutingPolicy", "Any", "*", "*",  
"*, "*", 6, "", "Any", 0, -1, 1, "", "", "internal", 0, -1, 0, 0, "", "",  
"";  
IP2IPRouting 1 = "3xxREFER outside", "Default_SBCRoutingPolicy", "ITSP",  
"*, "*", "*", "*", 0, "", "Genesys", 3, -1, 0, "Genesys", "Genesys", "",  
0, -1, 0, 0, "", "", "";  
IP2IPRouting 2 = "Genesys2RemoteAgents", "Default_SBCRoutingPolicy",  
"Genesys", "*", "*", "0689780433*", "*", 0, "", "Any", 0, -1, 0, "Remote  
Agents", "RemoteAgents", "", 0, -1, 0, 0, "", "", "";  
IP2IPRouting 3 = "Genesys2rm", "Default_SBCRoutingPolicy", "ITSP", "*",  
"*, "0689780439", "*", 0, "", "Any", 0, -1, 0, "Remote Agents",  
"RemoteAgents", "", 0, -1, 0, 0, "", "", "";  
IP2IPRouting 4 = "RemoteAgenst2Genesys", "Default_SBCRoutingPolicy",  
"Remote Agents", "*", "*", "*", "*", 0, "", "Any", 0, -1, 0, "Genesys",  
"Genesys", "", 0, -1, 0, 0, "", "", "";  
IP2IPRouting 8 = "ITSP2Genesys", "Default_SBCRoutingPolicy", "ITSP", "*",  
"*, "*", "*", 0, "", "Any", 0, -1, 0, "Genesys", "Genesys", "", 0, -1, 0,  
0, "", "", "";  
IP2IPRouting 10 = "Genesys2ITSP", "Default_SBCRoutingPolicy", "Genesys",  
"*, "*", "*", "*", 0, "", "Any", 0, -1, 0, "ITSP", "ITSP", "", 0, -1, 0,  
0, "", "", "";
```

```
[ \IP2IPRouting ]
```

```
[ Classification ]
```

```
FORMAT Classification_Index = Classification_ClassificationName,  
Classification_MessageConditionName, Classification_SRDName,  
Classification_SrcSIPInterfaceName, Classification_SrcAddress,  
Classification_SrcPort, Classification_SrcTransportType,  
Classification_SrcUsernamePrefix, Classification_SrcHost,  
Classification_DestUsernamePrefix, Classification_DestHost,  
Classification_ActionType, Classification_SrcIPGroupName,  
Classification_DestRoutingPolicy, Classification_IpProfileName;  
Classification 0 = "Remote Users", "", "DefaultSRD", "RemoteAgents", "", 0,  
-1, "*", "*", "*", "*", 1, "Remote Agents", "Default_SBCRoutingPolicy",  
"RemoteAgents";
```

```
[ \Classification ]
```

```
[ IPOutboundManipulation ]
```

```

FORMAT IPOutboundManipulation_Index =
IPOutboundManipulation_ManipulationName,
IPOutboundManipulation_RoutingPolicyName,
IPOutboundManipulation_IsAdditionalManipulation,
IPOutboundManipulation_SrcIPGroupName,
IPOutboundManipulation_DestIPGroupName,
IPOutboundManipulation_SrcUsernamePrefix, IPOutboundManipulation_SrcHost,
IPOutboundManipulation_DestUsernamePrefix, IPOutboundManipulation_DestHost,
IPOutboundManipulation_CallingNamePrefix,
IPOutboundManipulation_MessageConditionName,
IPOutboundManipulation_RequestType,
IPOutboundManipulation_ReRouteIPGroupName, IPOutboundManipulation_Trigger,
IPOutboundManipulation_ManipulatedURI,
IPOutboundManipulation_RemoveFromLeft,
IPOutboundManipulation_RemoveFromRight,
IPOutboundManipulation_LeaveFromRight, IPOutboundManipulation_Prefix2Add,
IPOutboundManipulation_Suffix2Add,
IPOutboundManipulation_PrivacyRestrictionMode,
IPOutboundManipulation_DestTags, IPOutboundManipulation_SrcTags;
IPOutboundManipulation 0 = "strip access digits",
"Default_SBCRoutingPolicy", 0, "Genesys", "Any", "*", "*", "79*", "*", "*",
", 0, "Any", 0, 1, 2, 0, 255, "", "", 2, "", "";

```

```
[ \IPOutboundManipulation ]
```

```
[ CodersGroup0 ]
```

```

FORMAT CodersGroup0_Index = CodersGroup0_Name, CodersGroup0_pTime,
CodersGroup0_rate, CodersGroup0_PayloadType, CodersGroup0_Sce,
CodersGroup0_CoderSpecific;
CodersGroup0 0 = "g729", 20, 0, -1, 0, "";
CodersGroup0 1 = "g711Alaw64k", 20, 0, -1, 0, "";

```

```
[ \CodersGroup0 ]
```

```
[ CodersGroup1 ]
```

```

FORMAT CodersGroup1_Index = CodersGroup1_Name, CodersGroup1_pTime,
CodersGroup1_rate, CodersGroup1_PayloadType, CodersGroup1_Sce,
CodersGroup1_CoderSpecific;
CodersGroup1 0 = "g729", 20, 0, -1, 0, "";
CodersGroup1 1 = "g711Alaw64k", 20, 0, -1, 0, "";

```

```
[ \CodersGroup1 ]
```

```
[ CodersGroup2 ]
```

```

FORMAT CodersGroup2_Index = CodersGroup2_Name, CodersGroup2_pTime,
CodersGroup2_rate, CodersGroup2_PayloadType, CodersGroup2_Sce,
CodersGroup2_CoderSpecific;
CodersGroup2 0 = "g729", 20, 0, -1, 0, "";
CodersGroup2 1 = "g711Alaw64k", 20, 0, -1, 0, "";

```

```
[ \CodersGroup2 ]
```

```
[ AllowedCodersGroup1 ]
```

```
FORMAT AllowedCodersGroup1_Index = AllowedCodersGroup1_Name;
AllowedCodersGroup1 0 = "g729";
AllowedCodersGroup1 1 = "g711Alaw64k";

[ \AllowedCodersGroup1 ]

[ AllowedCodersGroup2 ]

FORMAT AllowedCodersGroup2_Index = AllowedCodersGroup2_Name;
AllowedCodersGroup2 0 = "g729";
AllowedCodersGroup2 1 = "g711Alaw64k";

[ \AllowedCodersGroup2 ]

[ MessageManipulations ]

FORMAT MessageManipulations_Index = MessageManipulations_ManipulationName,
MessageManipulations_ManSetID, MessageManipulations_MessageType,
MessageManipulations_Condition, MessageManipulations_ActionSubject,
MessageManipulations_ActionType, MessageManipulations_ActionValue,
MessageManipulations_RowRole;
MessageManipulations 0 = "max forwards", 0, "any.request", "header.max-
forwards == '10'", "header.max-forwards.val", 2, "'30'", 0;
MessageManipulations 1 = "From header", 0, "Any.Request", "",
"Header.From.Url.Host", 2, "'extlab.com'", 0;
MessageManipulations 2 = "From header userphone", 0, "Any.Request", "",
"Header.from.url.userphone", 2, "'1'", 0;
MessageManipulations 3 = "To header", 0, "Any.request", "Header.to.url.host
== '10.38.5.107'", "Header.to.url.host", 2, "'213.213.83.147'", 0;
MessageManipulations 4 = "To header userphone", 0, "Any.request", "",
"header.to.url.userphone", 2, "'1'", 0;
MessageManipulations 5 = "URI port", 0, "Any.request", "", "header.Request-
URI.url.port", 0, "'5060'", 0;
MessageManipulations 10 = "URI host", 0, "Any.request", "header.REQUEST-
URI.url.host == '10.38.5.39'", "header.REQUEST-URI.url.host", 2,
"'213.213.83.147'", 0;
MessageManipulations 11 = "URI host to Genesys", 1, "Any.request",
"header.REQUEST-URI.url.host == '173.227.254.124'",
"header.REQUEST-URI.url.host", 2, "'10.38.5.39'", 0;
MessageManipulations 12 = "From header", 1, "any.request",
"header.from.url.host == 'extlab.com'", "header.from.url.host", 2,
"'10.38.5.39'", 0;
MessageManipulations 13 = "To header", 1, "any.request",
"header.to.url.host == '213.213.83.145'", "header.to.url.host", 2,
"'10.38.5.107'", 0;

[ \MessageManipulations ]

[ GwRoutingPolicy ]

FORMAT GwRoutingPolicy_Index = GwRoutingPolicy_Name,
GwRoutingPolicy_LCREnable, GwRoutingPolicy_LCRAverageCallLength,
GwRoutingPolicy_LCRDefaultCost, GwRoutingPolicy_LdapServerGroupName;
GwRoutingPolicy 0 = "GwRoutingPolicy", 0, 1, 0, "";

[ \GwRoutingPolicy ]
```



```
[ LoggingFilters ]

FORMAT LoggingFilters_Index = LoggingFilters_FilterType,
LoggingFilters_Value, LoggingFilters_LogDestination,
LoggingFilters_CaptureType, LoggingFilters_Mode;
LoggingFilters 0 = 1, "", 0, 3, 1;
LoggingFilters 1 = 13, "", 0, 0, 1;

[ \LoggingFilters ]


[ ResourcePriorityNetworkDomains ]

FORMAT ResourcePriorityNetworkDomains_Index =
ResourcePriorityNetworkDomains_Name,
ResourcePriorityNetworkDomains_Ip2TelInterworking;
ResourcePriorityNetworkDomains 1 = "dsn", 1;
ResourcePriorityNetworkDomains 2 = "dod", 1;
ResourcePriorityNetworkDomains 3 = "drsn", 1;
ResourcePriorityNetworkDomains 5 = "uc", 1;
ResourcePriorityNetworkDomains 7 = "cuc", 1;

[ \ResourcePriorityNetworkDomains ]
```




Configuration Note

