



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

SIP Server Deployment Guide

Alternate Routing for Unresponsive URS/ORS

12/21/2025

Alternate Routing for Unresponsive URS/ORS

Contents

- [1 Alternate Routing for Unresponsive URS/ORS](#)
 - [1.1 Feature Configuration](#)
 - [1.2 Feature Limitations](#)

SIP Server supports delivering calls to an alternative location in situations in which the Universal Routing Server (URS) or Orchestration Server (ORS) becomes non-operational or unresponsive. If enabled, SIP Server sends the call to a specified alternate DN should URS/ORS fail, or if the call waits too long on a Routing Point.

You can now configure multiple destinations for alternate routing.

In multi-site deployments, calls can be routed by using route or direct-uuu ISCC transaction types, or by using the ISCC Call Overflow mechanism. If route or direct-uuu transaction types are used, Genesys recommends configuring inbound trunks with OOSP (Out Of Signaling Path) for efficient use of alternate routing. That way, a call is removed from SIP Server, minimizing its load.

In addition, with this enhancement:


- When multiple alternate destinations are configured, including those located on different switches, SIP Server load balances them in a round-robin manner.
- SIP Server prevents loops in the routing path by ignoring all destinations that were already tried, and rejects the call if none are available.
- SIP Server supports standard log event 52053 for an alternate routing indication.

Feature Configuration

- Use the Application-level option `alternate-route-profile` to define a valid Routing Point DN that contains a Default DN's list. SIP Server uses that list when it encounters a Routing Point with an empty Default DN's list.
- Set the parameter `alternate-route-cof` to `true` to specify that alternate routing uses the ISCC Call Overflow feature.

Important

Alternate routing with attached data is enabled when alternate destinations are configured in a Default DN's list of the Routing Point DN configuration. However, if you configure the alternate destination using the `default-dn` option (on either the Application or the DN level), the alternate destination will be taken from that `default-dn` option. The alternate destination configured in `alternate-route-profile` will be ignored and not used.

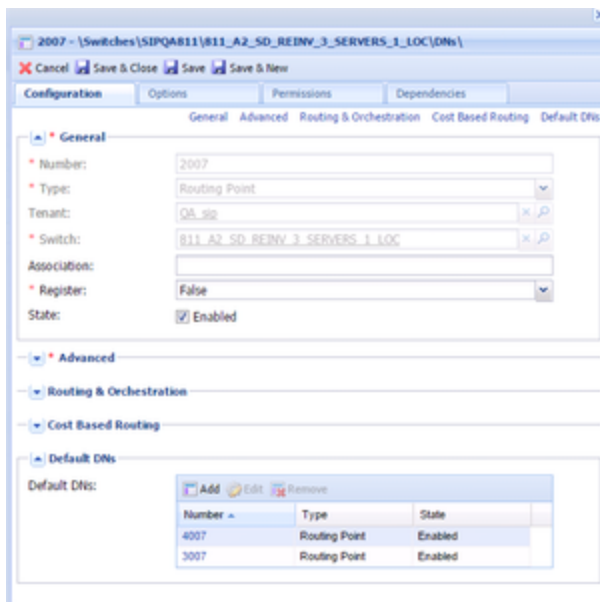

Configuration example: Default DNS list

alternate-route-profile

Setting: Application level

Section: TServer

Default Value: An empty string

Valid Values: A Routing Point DN with non-empty Default DNS list

Changes Take Effect: For the next default routing

Defines a Routing Point DN with a Default DNS list in its configuration. This list is used for alternate routing for all Routing Points with an empty Default DNS list.

alternate-route-cof

Setting: ISCC Protocol Parameters field of the Switch Access Code configuration object

Default Value: An empty string

Valid Values: true, false

Changes Take Effect: After SIP Server restart

When set to true, SIP Server uses the ISCC Call Overflow (COF) feature for alternate routing.

Feature Limitations

- Alternate routing does not support default access codes.
- SIP Server does not trigger alternate routing when the router-timeout timer is in progress and a URS disconnects from SIP Server, or when SIP Server submits a TUnregisterAddress request from the last T-Library client registered on this Routing Point. SIP Server triggers alternate routing only when the router-timeout timer expires.