

# Genesys

# **Events and Models**

# **Reference Manual**

The information contained herein is proprietary and confidential and cannot be disclosed or duplicated without the prior written consent of Genesys Telecommunications Laboratories, Inc.

Copyright © 2007–2011 Genesys Telecommunications Laboratories, Inc. All rights reserved.

#### **About Genesys**

Alcatel-Lucent's Genesys solutions feature leading software that manages customer interactions over phone, Web, and mobile devices. The Genesys software suite handles customer conversations across multiple channels and resources—self-service, assisted-service, and proactive outreach—fulfilling customer requests and optimizing customer care goals while efficiently using resources. Genesys software directs more than 100 million customer interactions every day for 4,000 companies and government agencies in 80 countries. These companies and agencies leverage their entire organization, from the contact center to the back office, while dynamically engaging their customers. Go to www.genesyslab.com for more information.

Each product has its own documentation for online viewing at the Genesys Technical Support website or on the Documentation Library DVD, which is available from Genesys upon request. For more information, contact your sales representative.

#### **Notice**

Although reasonable effort is made to ensure that the information in this document is complete and accurate at the time of release, Genesys Telecommunications Laboratories, Inc., cannot assume responsibility for any existing errors. Changes and/or corrections to the information contained in this document may be incorporated in future versions.

#### Your Responsibility for Your System's Security

You are responsible for the security of your system. Product administration to prevent unauthorized use is your responsibility. Your system administrator should read all documents provided with this product to fully understand the features available that reduce your risk of incurring charges for unlicensed use of Genesys products.

#### **Trademarks**

Genesys, the Genesys logo, and T-Server are registered trademarks of Genesys Telecommunications Laboratories, Inc. All other trademarks and trade names referred to in this document are the property of other companies. The Crystal monospace font is used by permission of Software Renovation Corporation, www.SoftwareRenovation.com.

#### **Technical Support from VARs**

If you have purchased support from a value-added reseller (VAR), please contact the VAR for technical support.

#### **Technical Support from Genesys**

If you have purchased support directly from Genesys, please contact Genesys Technical Support at the regional numbers provided on page 16. For complete contact information and procedures, refer to the *Genesys Technical Support Guide*.

#### **Ordering and Licensing Information**

Complete information on ordering and licensing Genesys products can be found in the Genesys Licensing Guide.

#### Released by

Genesys Telecommunications Laboratories, Inc. www.genesyslab.com

Document Version: 8g\_ref\_events-models\_03-2011\_v8.0.001.00



# **Table of Contents**

Preface		13
	Intended Audience	13
	Usage Guidelines	
	Making Comments on This Document	
	Contacting Genesys Technical Support	
Part 1	Genesys Events	17
	Genesys Events and Models Overview	17
	Servers and Their Events and Models	
	Protocol-Specific Issues	20
	Voice	21
Chapter 1	T-Library Events	23
	How to Use This Chapter	23
	List of T-Library Events	24
	General Events	
	EventServerConnected	
	EventServerDisconnected	
	EventLinkConnected	
	EventLinkDisconnected	
	Registration Events	
	EventRegistered	
	EventUnregistered	
	Call-Handling & Transfer/Conference Events	
	EventDialing	
	EventRinging	
	EventEstablished	
	EventAbandoned	
	EventDestinationBusy	
	EventDiverted	
	EventHeld	
	EventNetworkReached	
	EventPartyAdded	
	EventPartyChanged	

EventPartyDeleted	51
EventQueued	53
EventBridged	55
EventReleased	57
EventRetrieved	59
Network Attended Transfer Events	61
EventNetworkCallStatus	61
EventNetworkPrivateInfo	62
Call-Routing Events	64
EventRouteRequest	64
EventRouteUsed	66
Call-Treatment Events	68
EventTreatmentApplied	
EventTreatmentEnd	69
EventTreatmentNotApplied	71
EventTreatmentRequired	72
DTMF Events	73
EventDigitsCollected	73
EventDTMFSent	75
Voice-Mail Events	76
EventMailBoxLogin	
EventMailBoxLogout	
EventVoiceFileOpened	
EventVoiceFileClosed	79
EventVoiceFileEndPlay	80
Agent-State & DN Events	81
EventAgentLogin	81
EventAgentLogout	83
EventQueueLogout	84
EventAgentReady	85
EventAgentNotReady	86
EventAgentAfterCallWork (Obsolete—No Longer Supported)	89
EventAgentIdleReasonSet (Obsolete—No Longer Supported).	89
EventDNOutOfService	90
EventDNBackInService	90
EventDNDOn	91
EventDNDOff	93
EventForwardSet	
EventForwardCancel	
EventMonitoringNextCall	96
EventMonitoringCancelled	97
EventOffHook	
EventOnHook	
EventMuteOn	101

	Call Definition	163
Chapter 2	T-Library Call-Based Notifications	163
	TEvent Structure	159
	Event Attributes	
	Routing / Treatment State	
	State Modifiers	
	Supplementary State	
	Generic Telephony State	
	Availability of State Information	
	Unified Call-Party States	
	Agent States and Work Modes	
	EventError	
	Negative-Response Events	
	EventResourceFreed (Obsolete—No Longer Supported)	
	EventResourceFreed (Obsolete—No Longer Supported)	
	EventHardwareError	
	EventRestoreConnection	
	EventPrimaryChanged	
	EventUserEvent	
	EventPrivateInfo	
	EventCallInfoChanged	
	EventAgentReserved	
	EventACK	
	Special Events	
	EventReqGetAccessNumberCanceled	
	EventRemoteConnectionFailed	
	EventRemoteConnectionSuccess	
	EventAnswerAccessNumber	
	ISCC Events	
	EventAttachedDataChanged	
	User-Data Events	
	EventSwitchInfo	
	EventServerInfo	
	EventLocationInfo	
	EventPartyInfo	
	EventAddressInfo	
	Query Events	
	EventMessageWaitingOff	
	EventMessageWaitingOn	
	EventListenReconnected	
	EventListenDisconnected	
	EventMuteOff	

	Call Attributes	164
	T-Library Call-Based Events	164
	List of T-Library Call-Based Events	
	EventCallCreated	165
	EventCallDataChanged	166
	EventCallDeleted	167
	EventReleased—DEPRECATED	168
	Multi-Site Call Scenarios	171
	Simple Multi-Site Call	172
	Multi-Site Call Transfer	174
	Attaching the IS-Link Post Mortem	176
	Client-Side IS-Link Processing	179
Chapter 3	ISCC Transaction Monitoring	181
	The Subscription Type	181
	TSubscriptionOperationType	182
	Subscribing to Transaction Monitoring	182
	TTransactionMonitoring	182
	Subscription Rules	183
	The Transaction Monitoring Event	184
	EventTransactionStatus	184
	Transaction Monitoring States	186
	Object State	187
	Abstract Transaction State	188
	IS Link Creation Feature State	189
	Call Operation Feature State	191
	Resource Feature State	192
	Transaction Monitoring Elements	193
Chapter 4	T-Library Unstructured Data	197
	User Data	197
	Arrival, Use, and Manipulation of User Data	
	User Data in Consultation Calls	198
	User Data in Multi-Site Consultation Calls	200
	Extensions	201
	Extensions Common to All T-Servers According to Request	201
	Reasons	205
	Persistent Reasons	207
Chapter 5	IVR Protocol Messages	209
	General Messages	200

	LoginResp	209
	MonitorInfo	<mark>21</mark> 0
	Server Subtype	<mark>21</mark> 0
	Port Subtype	<mark>211</mark>
	Agent Subtype	
	Routing Messages	
	RouteResponse	
	Call Treatment Messages	
	TreatCall	
	Cancel	
	External Routing Messages	
	AccessNumResp	
	Transfer/Conferencing Messages	
	CallStatus	
	CallError	
	Call Information Messages	
	CallInfoResp	
	Statistics Messages	
	StatResp	
	User Data Messages	
	UDataResp	
	Outbound Messages	
	DialOutRegistryResp	
	DialOut	
	Didiodi	2 10
Part 2	Genesys Interaction Models	224
rait Z	Genesys interaction woders	. 221
Chapter 6	Call Models and Flows	223
	Legend	223
	List of Call Models	
	Basic Call Models	
	Simple Call Model	
	Connection-Establishing Phase (Internal/Inbound Call)	
	Connection-Establishing Phase (Internal/Inbound	
	Call to ACD)	233
	Connection-Establishing Phase (Internal/Inbound Call Queued to Multiple ACDs)	)
	Connection-Establishing Phase (Internal/Inbound Call	
	with Call Parking)  Connection-Establishing Phase (Internal/Inbound Call	240
	with Routing—RouteQueue Case)	243
	Connection-Establishing Phase (Internal/Inbound Call	273
	with Routing)	247

Connection-Establishing Phase (Internal/Inbound Call	054
with Routing Outbound)	
Connection-Establishing Phase (Outbound Call)	254
Connection-Establishing Phase While On Hold	257
(Internal/Outbound Call)	
Releasing Calls	
Release Phase	
Release from Conference Phase	
Delete from Conference Phase	
Holding, Transferring, and Conferencing	
Hold/Retrieve Function, Consulted Party Answers	
Hold/Retrieve Function, Consulted Party Does Not Answer	
Single-Step Transfer	
Single-Step Transfer (Outbound)	
Mute Transfer	
Two-Step Transfer: Complete After Consulted Party Answers	277
Two-Step Transfer: Complete Before Consulted Party Answers	000
(Blind)	
Two-Step Transfer: to ACD	
Two-Step Transfer: to a Routing Point	
Trunk Optimization: Trunk Anti-Tromboning	
Single-Step Conference	
Conference	296
Blind Conference (Complete Before Consulted	200
Party Answers)	
Conference with Two Incoming Calls Using TMergeCalls	
Handling User Data	
Attaching/Updating User Data to Internal Call	
Attaching/Updating User Data to Call by Third Party	
Special Cases	
Outbound Call to a Busy Destination	
Rejected Call	312
Internal Call to Destination with DND Activated	
Call Forwarding (on No Answer)	
Alternate-Call Service	
Reconnect-Call Service	
Redirect-Call Service	
Internal/Inbound Call with Bridged Appearance	
Outbound Call from Bridged Appearance	
Hold/Retrieve for Bridged Appearance	334
Internal/Inbound Call Answerable by Several Agents	
(Party B Answers)	
Call Treatment with Routing	
Predictive Dialing	343



	Predictive Call	343
	Predictive Call with Routing	347
	Predictive Call (Connected to a Device Specified in Extensions)	352
	Monitoring Calls	357
	Service Observing on Agent	357
	Service Observing for Agent-Initiated Call	363
	Service Observing on Queue	366
	Working With Queues	370
	Multiple-Queue Call Treated at an IVR Port: Treatment	
	at IVR Queue	370
	Multiple-Queue Call Treated at an IVR Port: Direct Treatment	
	at IVR Port	374
	Multiple-Queue Call: Call Removed from Queue	377
	Network T-Server Attended Transfer	
	Call Flows	
	Standard Network Call Initiation	
	Consultation Leg Initiation, Specific Destination	
	Failed Consultation: Specific Target	
	Consultation Leg Initiation, URS Selected Destination	
	Failed Consultation: URS Selected Destination	
	Transfer/Conference Completion: Explicit	
	Transfer Completion: Implicit	
	Conference Completion	
	Alternate Call Service	
	Alternate Call Service with Transfer Completion	
	Reconnection	
	Caller Abandonment	
	Network Single-Step Transfer	
	Premature Disconnection, One Variation	
	Premature Disconnection, a Second Variation	
	Transactional Error	392
Chapter 7	Basic Interaction Models	393
Chapter 1		
	Overview	
	Registration	
	Successful Registration	
	Unsuccessful Registration	
	Media Server Submits Interaction	
	Media Server Asks to Submit	
	Unsuccessful Submission by Media Server	
	Agent Submits Interaction	
	Successful Submission	
	Unsuccessful Submission	398

Stop Processing	399
A: Initiated by Media Server, Agent Involved	399
B: Initiated by Media Server, URS Involved	400
C: Initiated By Agent	401
D: Initiated by URS	402
Unsuccessful	403
Change Properties	404
Media Server Requests While Agent is Processing	404
Media Server Requests While URS is Processing	405
URS Requests	406
Unsuccessful Request	407
Place Interaction in Queue	408
Place Interaction in Workbin	409
Deliver Interaction to Agent	411
URS Requests Delivery	411
Agent Accepts Delivery	412
Agent Rejects Delivery	413
Agent Fails to Respond in Time	413
Agent Pulls Interaction	414
Agent Issues Pull Request	414
Processing Occurs	416
No Processing: Timeout	417
Transfer	418
Invitation Issued	418
Invitation Accepted	419
Invitation Rejected	419
Invitation Times Out	420
Invitation Is Invalid	421
Conference	421
Invitation Issued	422
Invitation Accepted	423
Invitation Rejected	424
Invitation Times Out	424
Invitation Is Invalid	425
Leave the Conference	426
Fail to Leave the Conference	427
Workbin Operations	427
Agent Gets Workbin Content	428
Agent Fails to Get Workbin Content	428
Agent Requests Workbin Notification	429
Agent Cancels Workbin Notifications	429
Snapshot Operations	430
Take a Spanshot	430

	Get Snapshot Interactions	431
	Lock or Unlock Interactions	432
	Release Snapshot	432
	Intrusion	433
	Intrusion Requested	433
	Intrusion Accepted	434
	Intrusion Rejected by Agent	435
	Intrusion Rejected by Interaction Server	
	Intrusion Times Out	437
	Login/Logout	437
	Agent Logs In	
	Agent Logs Out	
	Reporting Engine Connects	
	Disconnection and Failover	441
	Agent Disconnects	
	Interaction Server Disconnects	
	Interaction Server Restarts	
	Invoke Autoresponse	444
Chapter 8	IVR Call Flows	447
	Overview	447
	Call Routing Call Flow	
	Route Failed	449
	Reroute	450
	Call Treatment	451
	Call Treatment Failed	
	Call Treatment Interrupted	
	MakeCall Call Flow	
	MakeCall (Busy)	
	Conference Call Flow Diagrams	
	One-Step Conference	
	One-Step Conference, Scenario 2	
	Conference Consult Call	
	Conference Consult Call, Scenario 2	
	Conference Consult Call (Busy)	
	Conference Consult Call (Failed)	
	Transfer Call Flow Diagrams	
	Transfer to Remote Site	
	Single-Step Transfer	
	Transfer Consult Call	
	Transfer Consult Call (Busy)	
	Transfer Consult Call (Failed)	

Supplements	Related Documentation Resources	467
	Document Conventions	470
Index		473





## **Preface**

Welcome to the *Genesys Events and Models Reference Manual*. This manual introduces you to many of the call and interaction events and models that you may encounter in a Genesys deployment.

This document is valid for the 7.x and 8.x releases of products related to these models.

This preface contains the following sections:

- Intended Audience, page 13
- Usage Guidelines, page 14
- Making Comments on This Document, page 15
- Contacting Genesys Technical Support, page 16

In brief, you will find the following information in this guide:

- A full list of call and other interaction events and their descriptions.
- A collection of common call and other interaction models and flows.
- Some specialized information on call and other interaction state.

For information about related resources and about the conventions that are used in this document, see the supplementary material starting on page 467.

# **Intended Audience**

This guide is intended for application developers who are familiar with Genesys deployments and need to do gain greater insight into their workings. Experienced system administrators might also use this *Reference* for advanced configuration issues. For instance, you might use this *Events and Models Reference* and its sample call models to help you handle and anticipate events for a custom application you are designing to work in a Genesys deployment. Or you might look at the important values associated with certain events in a model, and use that information to specially configure a routing strategy.

This document provides detailed information on the workings of interactions in a Genesys environment.

It assumes that you have a basic understanding of:

• The underlying concepts of CTI technology.

Preface Usage Guidelines

- A familiarity with the workings of Genesys Interactions.
- Genesys environment deployment and operation.
- Your own Genesys configurations.

You may also find that a familiarity with messaging-compliant programming gives you greater insight into issues as you read this document. A solid understanding of client-server implementations is also useful.

# **Usage Guidelines**

The Genesys developer materials outlined in this document are intended to be used for the following purposes:

- Creation of contact-center agent desktop applications associated with Genesys software implementations.
- Server-side integration between Genesys software and third-party software.
- Creation of a specialized client application specific to customer needs.

The Genesys software functions available for development are clearly documented. No undocumented functionality is to be utilized without Genesys's express written consent.

The following Use Conditions apply in all cases for developers employing the Genesys developer materials outlined in this document:

- 1. Possession of interface documentation does not imply a right to use by a third party. Genesys conditions for use, as outlined below or in the *Genesys Developer Program Guide*, must be met.
- 2. This interface shall not be used unless the developer is a member in good standing of the Genesys Interacts program or has a valid Master Software License and Services Agreement with Genesys.
- **3.** A developer shall not be entitled to use any licenses granted hereunder unless the developer's organization has met or obtained all prerequisite licensing and software as set out by Genesys.
- **4.** A developer shall not be entitled to use any licenses granted hereunder if the developer's organization is delinquent in any payments or amounts owed to Genesys.
- 5. A developer shall not use the Genesys developer materials outlined in this document for any general application development purposes that are not associated with the above-mentioned intended purposes for the use of the Genesys developer materials outlined in this document.
- **6.** A developer shall disclose the developer materials outlined in this document only to those employees who have a direct need to create, debug, and/or test one or more participant-specific objects and/or software files that access, communicate, or interoperate with the Genesys API.

14 Genesys S

- 7. The developed works and Genesys software running in conjunction with one another (hereinafter referred to together as the "integrated solutions") should not compromise data integrity. For example, if both the Genesys software and the integrated solutions can modify the same data, then modifications by either product must not circumvent the other product's data integrity rules. In addition, the integration should not cause duplicate copies of data to exist in both participant and Genesys databases, unless it can be assured that data modifications propagate all copies within the time required by typical users.
- **8.** The integrated solutions shall not compromise data or application security, access, or visibility restrictions that are enforced by either the Genesys software or the developed works.
- **9.** The integrated solutions shall conform to design and implementation guidelines and restrictions described in the *Genesys Developer Program Guide* and Genesys software documentation. For example:
  - **a.** The integration must use only published interfaces to access Genesys data
  - **b.** The integration shall not modify data in Genesys database tables directly using SQL.
  - **c.** The integration shall not introduce database triggers or stored procedures that operate on Genesys database tables.

Any schema extension to Genesys database tables must be carried out using Genesys Developer software through documented methods and features.

The Genesys developer materials outlined in this document are not intended to be used for the creation of any product with functionality comparable to any Genesys products, including products similar or substantially similar to Genesys's current general-availability, beta, and announced products.

Any attempt to use the Genesys developer materials outlined in this document or any Genesys Developer software contrary to this clause shall be deemed a material breach with immediate termination of this addendum, and Genesys shall be entitled to seek to protect its interests, including but not limited to, preliminary and permanent injunctive relief, as well as money damages.

# **Making Comments on This Document**

If you especially like or dislike anything about this document, feel free to email your comments to Techpubs.webadmin@genesyslab.com.

You can comment on what you regard as specific errors or omissions, and on the accuracy, organization, subject matter, or completeness of this document. Please limit your comments to the scope of this document only and to the way in which the information is presented. Contact your Genesys Account Representative or Genesys Technical Support, if you have suggestions about the product itself.

When you send us comments, you grant Genesys a nonexclusive right to use or distribute your comments in any way that it believes appropriate, without incurring any obligation to you.

# **Contacting Genesys Technical Support**

If you have purchased support directly from Genesys, contact Genesys Technical Support at the following regional numbers:

Region	Telephone	E-Mail
North America and Latin America	+888-369-5555 (toll-free) +506-674-6767	support@genesyslab.com
Europe, Middle East, and Africa	+44-(0)-1276-45-7002	support@genesyslab.co.uk
Asia Pacific	+61-7-3368-6868	support@genesyslab.com.au
Malaysia	1-800-814-472 (toll-free) +61-7-3368-6868 (International)	support@genesyslab.com.au
India	000-800-100-7136 (toll-free) +61-7-3368-6868 (International)	support@genesyslab.com.au
Japan	+81-3-6361-8950	support@genesyslab.co.jp

Before you contact technical support, refer to the *Genesys Technical Support Guide* for complete contact information and procedures.

Genesys S



**Part** 

1

# **Genesys Events**

Part One of this document contains both an overview of this entire document, and specific information about Genesys events. This event information is wide ranging, and may include everything from the names and descriptions of events to the attendant event attributes, to the definitions of event substates. Based on the history of how this information has been presented in the past in various documents, event information may differ from chapter to chapter. This information appears in the following chapters:

- Chapter 1, "T-Library Events," on page 23 contains a list and description of each T-Library event that T-Servers generate. It also identifies the attributes that accompany each event.
- Chapter 2, "T-Library Call-Based Notifications," on page 163 contains information on the TLIB events that relate to a call (as opposed to a DN or device).
- Chapter 3, "ISCC Transaction Monitoring," on page 181 describes how to work with ISCC regarding issues such as multi-site call transfer, inter-site call linkage, call overflow, and other, possibly non-call-related, multi-site operations.
- Chapter 4, "T-Library Unstructured Data," on page 197 provides information on how TLIB handles UserData, Extensions, and Reasons in events in a Genesys system.
- Chapter 5, "IVR Protocol Messages," on page 209 offers detailed information about IVR Server events.

# **Genesys Events and Models Overview**

This *Reference Manual* provides you with a large collection of two different types of information: descriptions of Genesys events and illustrations of Genesys interaction models. Generally, you need to know about Genesys events and standard interaction models if you are developing custom

applications for integration with Genesys systems, or if you are trying to gain greater insight into the flow of interactions in your contact center.

"Genesys Events" on page 17 is the events portion of this document. The information in this Part is wide ranging, and includes everything from the names and descriptions of events, to the attributes that attend events, to the definitions of event substates. Based on the history of how this information has been presented in the past in various documents, event information may differ from chapter to chapter.

"Genesys Interaction Models" on page 221 is the models portion of this document. It contains a selected list of call/interaction models. This information is also wide ranging. Based on the history of how this information has been presented in the past in various documents, model details may differ from chapter to chapter.

In both parts of this document, chapters are organized according to the type of event or model being described. So, both Part One and Part Two have specific chapters on voice-based issues that center on T-Library's generation of events and how calls are routed in a contact center.

#### **Servers and Their Events and Models**

When Genesys Servers start up and when they process interactions, they repeatedly perform certain tasks. This manual presents examples of these tasks in the form of events the servers generate and models that show how the components interact. You can study these events and models to:

- Get a better idea of how the various portions of your system work.
- Troubleshoot your system by inspecting the logs that record interactions of the type exemplified in this document.
- Understand what functions must be performed by a custom-built component that you want to design.

#### **Events**

Genesys servers generate events. These events can both be in response to requests that other components make of those servers, or they can be unsolicited (Genesys servers are programmed to notify clients for any number of reasons). Events that arrive in response to a request have an identifier you can use to link the two.

**Note:** Event names may differ slightly across Genesys SDK products and technologies. The names you see in this document correspond generally to the names you will see when using the SDKs. For the authoritative names of events used by your SDK, refer to the *API Reference* of the SDK your are using.

This document attempts to provide enough information about each event you may encounter so that you can intelligently handle events in your customized code, but also so you can better understand issues that arise in your contact center. Reviewing log files is far easier when you have an understanding of the implications of given events.

Each event has a number of attributes associated with it to give you more information on the process that is occurring. A given event's attributes are not static. Depending on the request or environment, certain attributes may or may not be present. For completeness, this book documents all attributes that you might encounter with a given event.

#### **Models**

Call models and interaction flows serve a number of important purposes. First, no development for the core Genesys servers can take place unless there is a general understanding of how a given call scenario, for instance, should proceed in a contact center. The collections of interaction flows presented in this *Reference Manual* represents the most common scenarios that Genesys software users encounter.

#### **Elements in Call and Interaction Models**

Events as depicted in the models are *protocol-specific*. That is, a given library issues its own events according to its own definitions (though some events from different libraries have similar names). The ordering and naming of events passed between components (messaging) in these models makes use of the various protocols being described. These include, but are not limited to:

- T-Library (the TLIB protocol): The core library for use in processing all voice-based interactions.
- Multimedia Interaction Management (the ITX and ESP protocols): The means by which Interaction Server processes its non-voice interactions.
- Multimedia Reporting protocol: This is Genesys Multimedia's own reporting protocol, different from the one used by other Genesys applications that are reporting-specific.
- Universal Routing Server's (URS) use of a subset of T-Library events: Interaction Server uses these events to communicate with URS. When these T-Library events occur in the model diagrams, the equivalent Interaction Management protocol event is also shown. (The full collection of T-Library events, available in Chapter 1, "T-Library Events," on page 23, is the authoritative list of T-Library events.)

**Note:** For events and models of protocols not listed here (for instance, STATLIB or CONFIGLIB), refer to the *API Reference* (*Statistics* or *Configuration Platform SDK API Reference for .NET* or *Java*, in these cases) of the SDK you are using.

Diagrams show time along the vertical axis, moving from top to bottom. Participants are arranged along the horizontal axis.

#### Interactions

The term *interaction* in a Genesys context has the following sense: an attempted communication between a customer and a contact center, in either direction. The attempt may be successful or not; it has a media type; it may give rise to other interactions (as when an incoming e-mail gives rise to an automatic acknowledgement). It may belong to a series of related interactions, known as a *thread*. Interaction properties are generally recorded in a database.

#### **Participants**

*Participants* are software components that send and receive messages. The participants in the models in this book include the following:

- T-Server and IVR Server
- Switch and IVR
- Interaction Server
- Media server (E-mail Server Java, Chat Server, or a custom application)
- Agent application
- Universal Routing Server
- Reporting engine (Stat Server or Call Concentrator)

### **Protocol-Specific Issues**

In general, this manual attempts to unify the concept of events and models across a number of disparate Genesys components. This allows you to move from component to component with one reference as your guide for how interactions are processed. However, you may find that you want more information about specific protocols. In each case, the authoritative collection of function calls and events for a given server's protocol is available from its corresponding Platform SDK API Reference. (See the Platform SDK API Reference, .NET or Java, available from the Developer Documentation CD and the Genesys DevZone portal, for the server that interests you.)

### **Voice**

The characteristic feature of events related to voice interactions is T-Server's use of the TEvent data structure to return the results of requests sent by applications using T-Library functions or as notification that there has been some activity on a monitored object.

Some examples of event member values include:

EventRegistered

application has registered a DN.

EventUnregistered

application has unregistered a DN.

EventAgentLogin

agent has logged in to ACD group.

EventAgentLogout

agent has logged out of ACD.

EventAgentReady

agent is ready to receive ACD calls.

Chapter 1, "T-Library Events," on page 23, has detailed information on the TEVENT data structure.

While this document presents a full representation of the TEvent structure, certain of its members are reserved for internal use only.



**Chapter** 

# 1

# **T-Library Events**

This chapter provides detailed information about the T-Library Events. Information for this chapter is divided among the following sections:

- How to Use This Chapter, page 23
- List of T-Library Events, page 24
- General Events, page 28
- Registration Events, page 33
- Call-Handling & Transfer/Conference Events, page 36
- Network Attended Transfer Events, page 61
- Call-Routing Events, page 64
- Call-Treatment Events, page 68
- DTMF Events, page 73
- Voice-Mail Events, page 76
- Agent-State & DN Events, page 81
- Query Events, page 108
- User-Data Events, page 121
- ISCC Events, page 123
- Special Events, page 126
- Negative-Response Events, page 134
- Agent States and Work Modes, page 135
- Unified Call-Party States, page 139
- Event Attributes, page 146
- TEvent Structure, page 159

# **How to Use This Chapter**

This chapter lists the events that developers can expect to see while working with a Genesys implementation. Each event listed here is identified with a description, the contents of the event (presented in table format as a list of the

attributes associated with it), and an example of where the event is likely to be encountered during a call flow. The end of this chapter includes general information about various event-related issues, including an agent-state diagram, definitions of event attributes (including, for the reference ID attribute, a table of the relationships between requests and events), and a description of the TEvent structure.

Event contents are presented as the collection of attributes associated with each event, as well as an indication of that attribute's *Type*. For the purposes of this chapter, Type has one of two values: *Mandatory* or *Optional*. Here Type refers to the presence of the attribute at the time of the generation of its event, and not to a characteristic of the attribute itself.

#### **Attribute Type:**

- Mandatory—Indicates that this autoboot is always present when its associated event occurs
- Optional—Indicates that this attribute may or may not be present when the associated event occurs.

# **List of T-Library Events**

**Table 1: List of T-Library Events** 

Event	Page #	
General Events		
EventServerConnected	page 28	
EventServerDisconnected	page 29	
EventLinkConnected	page 30	
EventLinkDisconnected	page 32	
Registration Events		
EventRegistered	page 33	
EventUnregistered	page 34	
Call-Handling & Transfer/Conference Events		
EventDialing	page 36	
EventRinging	page 37	
EventEstablished	page 39	

Table 1: List of T-Library Events (Continued)

Event	Page #	
EventAbandoned	page 41	
EventDestinationBusy	page 42	
EventDiverted	page 44	
EventHeld	page 45	
EventNetworkReached	page 47	
EventPartyAdded	page 48	
EventPartyChanged	page 50	
EventPartyDeleted	page 51	
EventQueued	page 53	
EventBridged	page 55	
EventReleased	page 57	
EventRetrieved	page 59	
Network Attended Transfer Events		
EventNetworkCallStatus	page 61	
EventNetworkPrivateInfo	page 62	
Call-Routing Events		
EventRouteRequest	page 64	
EventRouteUsed	page 66	
Call-Treatment Events		
EventTreatmentApplied	page 68	
EventTreatmentEnd	page 69	
EventTreatmentNotApplied	page 71	
EventTreatmentRequired	page 72	
DTMF Events		
EventDigitsCollected	page 73	

Table 1: List of T-Library Events (Continued)

Event	Page #
EventDTMFSent	page 75
Voice-Mail Events	
EventMailBoxLogin	page 76
EventMailBoxLogout	page 78
EventVoiceFileOpened	page 78
EventVoiceFileClosed	page 79
EventVoiceFileEndPlay	page 80
Agent-State & DN Even	ts
EventAgentLogin	page 81
EventAgentLogout	page 83
EventQueueLogout	page 84
EventAgentReady	page 85
EventAgentNotReady	page 86
EventAgentAfterCallWork (Obsolete—No Longer Supported)	page 89
EventAgentIdleReasonSet (Obsolete—No Longer Supported)	page 89
EventDNOutOfService	page 90
EventDNBackInService	page 90
EventDNDOn	page 91
EventDNDOff	page 93
EventForwardSet	page 94
EventForwardCancel	page 95
EventMonitoringNextCall	page 96
EventMonitoringCancelled	page 97
EventOffHook	page 99

Table 1: List of T-Library Events (Continued)

Event	Page #	
EventOnHook	page 100	
EventMuteOn	page 101	
EventMuteOff	page 102	
EventListenDisconnected	page 103	
EventListenReconnected	page 104	
EventMessageWaitingOn	page 106	
EventMessageWaitingOff	page 107	
Query Events		
EventAddressInfo	page 108	
EventPartyInfo	page 115	
EventLocationInfo	page 117	
EventServerInfo	page 119	
EventSwitchInfo	page 120	
User-Data Events		
EventAttachedDataChanged	page 121	
ISCC Events		
EventAnswerAccessNumber	page 123	
EventRemoteConnectionSuccess	page 124	
EventRemoteConnectionFailed	page 125	
EventReqGetAccessNumberCanceled	page 125	
Special Events		
EventACK	page 126	
EventAgentReserved	page 128	
EventCallInfoChanged	page 129	
EventPrivateInfo	page 129	

**Table 1: List of T-Library Events (Continued)** 

Event	Page #
EventUserEvent	page 130
EventPrimaryChanged	page 131
EventRestoreConnection	page 131
EventHardwareError	page 133
EventResourceAllocated (Obsolete—No Longer Supported)	page 133
EventResourceFreed (Obsolete—No Longer Supported)	page 134
Negative-Response Events	
EventError	page 134

# **General Events**

### **EventServerConnected**

# **Event Description**

The communication session with the server in question has been opened. This event is generated on the client side and only in asynchronous communication mode.

### **Event Contents**

**Table 2: EventServerConnected Contents** 

Event Attribute	Туре
Event	Mandatory
Server	Mandatory
Extensions	Optional

Genesys S

### **Example**




Figure 1: EventServerConnected Feature Example

### **EventServerDisconnected**

### **Event Description**

The communication session with the server in question has failed. T-Library generates this event as soon as it recognizes that the connection with T-Server has been lost.

#### **Event Contents**

**Table 3: EventServerDisconnected Contents** 

Event Attribute	Туре
Event	Mandatory
Server	Mandatory
Extensions	Optional

### **Example**

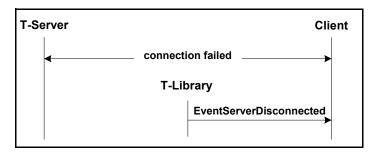


Figure 2: EventServerDisconnected Feature Example

### **EventLinkConnected**

### **Event Description**

This event is generated in two ways: either as a notification that the connection between the switch and T-Server, through the CTI link, has been restored, or as a response to the TOpenServerEx() and TOpenServer() functions (that is, after connecting to T-Server) to indicate the current CTI-link status.

If you are working with a pair of T-Servers with Hot Standby mode in a high-availability environment, this event is also generated during T-Server switchover.

Genesys S

### **Event Contents**

Table 4: EventLinkConnected Contents

Event Attribute	Туре
ApplicationName	Optional
Event	Mandatory
Server	Mandatory
SessionID	Optional
CustomerID	Optional
time	Mandatory
Extensions	Optional

### **Examples**




Figure 3: EventLinkConnected Feature, Example 1

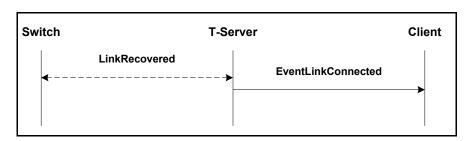


Figure 4: EventLinkConnected Feature, Example 2

### **EventLinkDisconnected**

### **Event Description**

This event is generated as a notification that the connection between the switch and T-Server, through the CTI link, has been severed.

If you are working with a pair of T-Servers with Hot Standby mode in a high-availability environment, this event is also generated during T-Server switchover.

#### **Event Contents**

Table 5: EventLinkDisconnected Contents

Event Attribute	Туре
ApplicationName	Optional
SessionID	Optional
CustomerID	Optional
ErrorCode	Optional
ErrorMessage	Optional
Event	Mandatory
Server	Mandatory
time	Mandatory
Extensions	Optional

### **Examples**

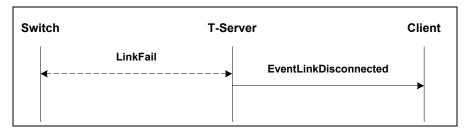


Figure 5: EventLinkDisconnected Feature, Example 1

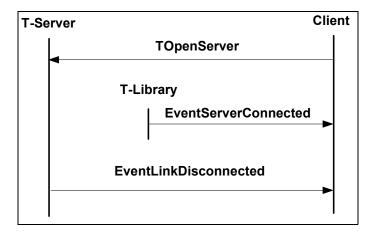


Figure 6: EventLinkDisconnected Feature, Example 2

# **Registration Events**

### **EventRegistered**

### **Event Description**

The application has been registered to send requests and receive events regarding the telephony object specified by ThisDN.

### **Event Contents**

**Table 6: EventRegistered Contents** 

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
CustomerID	Optional
Event	Mandatory
Extensions <sup>b</sup>	Mandatory
InfoStatus.AddressType	Optional
InfoType=AddressInfoAddressType	Mandatory
ReferenceID	Mandatory
Server	Mandatory

Table 6: EventRegistered Contents (Continued)

Event Attribute	Туре
ThisDN	Mandatory
time	Mandatory

- a. The AgentID attribute can only be present for objects of AddressTypePosition or AddressTypeDN. See the contents of Extensions.
- b. The Extensions attribute contains the same information as in EventAddressInfo:

For objects of AddressTypePosition or AddressTypeDN, see the corresponding InfoType=TAddressInfoDNStatus.

For objects of AddressTypeQueue, AddressTypeRouteDN, or AddressTypeRouteQueue, see InfoType=TAddressInfo-QueueStatus.

Details for Extensions in EventAddressInfo are available on page 110.

### **Example**



Figure 7: EventRegistered Feature Example

### **EventUnregistered**

### **Event Description**

The application's registration to send requests and receive events regarding the telephony object specified by ThisDN has been canceled.

#### **Event Contents**

**Table 7: EventUnregistered Contents** 

Event Attribute	Туре
CustomerID	Optional
ErrorCode	Optional
ErrorMessage	Optional
Event	Mandatory
ReferenceID <sup>a</sup>	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

a. The ReferenceID attribute is mandatory in most cases, but not present if the switch configuration has been changed while the CTI link was down or if T-Server configuration has been changed dynamically through Configuration Manager. Meanwhile, the cause of unregistration is specified by the attributes ErrorCode and ErrorMessage.

### **Example**




Figure 8: EventUnregistered Feature Example

# Call-Handling & Transfer/Conference Events

# **EventDialing**

### **Event Description**

An attempt to make a call on behalf of the telephony object specified by ThisDN is in progress.

### **Event Contents**

**Table 8: EventDialing Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType <sup>a</sup>	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>b</sup>	Optional
OtherDNRole <sup>b</sup>	Optional
OtherQueue	Optional
OtherTrunk	Optional

**Table 8: EventDialing Contents (Continued)** 

Event Attribute	Туре
PreviousConnID <sup>c</sup>	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue <sup>d</sup>	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. CallType may be Unknown.
- b. OtherDN may be either a dialed number or not present if T-Server has no information about the other party.
   OtherDNRole appears if the attribute OtherDN is present.
- c. Previous ConnID must appear if the value of CallType is Consult.
- d. ThisQueue must appear in predictive dialing and be equal to ThisDN.

## **Examples**

See the example after "EventRinging."

# **EventRinging**

### **Event Description**

A call has been delivered to the telephony object specified by ThisDN.

### **Event Contents**

**Table 9: EventRinging Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
CollectedDigits	Optional
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory

Event Attribute	Туре
ThirdPartyDN	Optional
ThisQueue <sup>b</sup>	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

**Table 9: EventRinging Contents (Continued)** 

- a. The attribute must appear if the value of CallType is Consult.
- b. The attribute must appear in case of an ACD call.

### **Example**

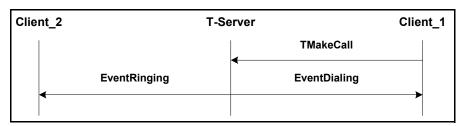


Figure 9: EventRinging Feature Example

### **EventEstablished**

### **Event Description**

For the application associated with the calling party: the telephony object specified by OtherDN has answered (either the calling party answered or the switch simulated an answer if option auto-answer is set on the switch) and the connection has been established. For the application associated with the called party: the call associated with ConnID has been established.

### **Event Contents**

Table 10: EventEstablished Contents

Event Attribute	Туре
Event	Mandatory
Server	Mandatory
CustomerID	Optional
ReferenceID	Optional
ConnID	Mandatory
PreviousConnID <sup>a</sup>	Optional
CallID	Mandatory
CollectedDigits	Optional
CallHistory	Optional
CallType	Mandatory
CallState	Optional
AgentID	Optional
ThisDN	Mandatory
ThisQueue	Optional
ThisDNRole	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherTrunk	Optional
OtherQueue	Optional
OtherDNRole	Optional
DNIS	Optional
ANI	Optional
UserData	Optional

Table 10: EventEstablished Contents (Continued)

Event Attribute	Туре
Reasons	Optional
Extensions	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional

a. The attribute must appear if the value of CallType is Consult.

### **EventAbandoned**

## **Event Description**

The caller abandoned the call before it was answered.

**Table 11: EventAbandoned Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional

Table 11: EventAbandoned Contents (Continued)

Event Attribute	Туре
PreviousConnID <sup>a</sup>	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue <sup>b</sup>	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The attribute must appear if the value of CallType is Consult.

# **EventDestinationBusy**

## **Event Description**

The called party specified by OtherDN is busy with another call.

b. The attribute must appear in case of an ACD call.

**Table 12: EventDestinationBusy Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState <sup>a</sup>	Optional
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherQueue	Optional
OtherTrunk	Optional
PreviousConnID <sup>b</sup>	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. For scenarios initiated with RequestMakeCall, this attribute may have values that clarify the reason for the destination being busy, for instance
   CallStateSitInvalidNum.
- b. The attribute must appear if the value of CallType is Consult.

### **EventDiverted**

### **Event Description**

The call has been diverted from the queue to another telephony object.

#### **Event Contents**

**Table 13: EventDiverted Contents** 

Event Attribute	Туре
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
CollectedDigits	Optional
CustomerID	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional

**Table 13: EventDiverted Contents (Continued)** 

Event Attribute	Туре
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Server	Mandatory
ThirdPartyDN <sup>b</sup>	Optional
ThirdPartyDNRole	Optional
ThirdPartyQueue <sup>b</sup>	Optional
ThisDN <sup>c</sup>	Mandatory
ThisDNRole	Mandatory
ThisQueue <sup>c</sup>	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. The attribute must appear if the value of CallType is Consult.
- b. Attributes must be present if the value of CallState is Redirected. (See "Redirect-Call Service" on page 325.) In all other call scenarios, ThirdPartyDN must be present only if such information is provided by a CTI link.
- c. These attributes must be equal.

### **EventHeld**

### **Event Description**

The call has been placed on hold.

### **Event Contents**

**Table 14: EventHeld Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
time	Mandatory

**Table 14: EventHeld Contents (Continued)** 

Event Attribute	Туре
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The attribute must appear if the value of CallType is Consult.

### **EventNetworkReached**

## **Event Description**

The call has reached the public network interface.

**Table 15: EventNetworkReached Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional

Table 15: EventNetworkReached Contents (Continued)

Event Attribute	Туре
OtherDNRole	Optional
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The attribute must appear if the value of CallType is Consult.

## **EventPartyAdded**

## **Event Description**

One or more parties has been added to the call as a result of a conference. If only one party is added (as in the case of a simple conference call), the corresponding telephony object is specified in OtherDN. If more than one party is added, then the corresponding telephony objects are specified in Extensions.

#### **Event Contents**

**Table 16: EventPartyAdded Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional

Table 16: EventPartyAdded Contents (Continued)

Event Attribute	Туре
CallHistory	Optional
CallState	Optional
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
Server	Mandatory
ThirdPartyDN <sup>a</sup>	Mandatory
ThirdPartyDNRole <sup>a</sup>	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. This attribute is not present if the switch does not distribute it to T-Server.

# **EventPartyChanged**

### **Event Description**

The telephony object specified by OtherDN has replaced the telephony object specified by OtherDN in the previously received event; or the PreviousConnID of the call has been given a new value, ConnID.

#### **Event Contents**

**Table 17: EventPartyChanged Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState <sup>a</sup>	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>b</sup>	Optional
OtherDNRole <sup>b</sup>	Optional
OtherTrunk <sup>b</sup>	Optional

**Table 17: EventPartyChanged Contents (Continued)** 

Event Attribute	Туре
PreviousConnID	Mandatory
Server	Mandatory
ThirdPartyDN <sup>c</sup>	Mandatory
ThirdPartyDNRole <sup>c</sup>	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. The value can be either Transferred or Conferenced. For more information, see Chapter 6.
- b. The attribute must not appear if the CallState is Conferenced.
- c. This attribute is not present if the switch does not distribute it to T-Server.

# **EventPartyDeleted**

### **Event Description**

The telephony object specified by OtherDN has been deleted from the conference call in question.

### **Event Contents**

**Table 18: EventPartyDeleted Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState <sup>a</sup>	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN	Optional
ThirdPartyDNRole	Optional
ThisDN	Mandatory
ThisDNRole	Mandatory

Table 18: EventPartyDeleted Contents (Continued)

Event Attribute	Туре
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The attribute indicates whether a call is still considered as a conference (that is, the number of parties in the call is more than two).

### **EventQueued**

### **Event Description**

The call has been queued in the ACD group specified by ThisQueue.

**Table 19: EventQueued Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Optional
CallType	Mandatory
CollectedDigits	Optional
ConnID	Mandatory

Table 19: EventQueued Contents (Continued)

Event Attribute	Туре
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
LastCollectedDigit	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Server	Mandatory
ThisDN <sup>b</sup>	Mandatory
ThisDNRole	Mandatory
ThirdPartyDN	Optional
ThisQueue <sup>b</sup>	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The attribute must appear if the value of CallType is Consult.

b. These attributes must be equal.

Genesys 🥃

### **EventBridged**

#### **Event Description**

Used in situations where Coverage Path is available or bridged calls can be handled. EventBridged indicates an extension, besides the one pointed to by ThisDN, has picked up the call, and that the telephony object specified by ThisDN is no longer ringing (although it still can pick up the call, establishing a three-way conversation).

EventBridged is used to describe a state where the call is neither ringing nor established. The nature of a bridge is such that it is possible for a call to move to a bridged state even after it has been released. Because of this, only calls released through CTI will be detected as moving into the bridged state. If a client issues a RequestReleaseCall() on a bridged call with two or more active bridged or bridging parties, EventReleased, with CallState = CallStateBridged, follows for the releasing party; the releasing party then receives EventBridged. At this point, a client may issue a RequestAnswerCall() to activate the call. If the client does this, EventEstablished follows.

#### **Notes:**

- Currently, T-Server does not fully support placing a bridged or bridging call on hold when there is only one active bridge. If a client attempts to place such a call on hold, T-Server does not reflect the held state of all members.
- Transferring and conferencing a bridged or bridging call currently works only when there is no more than one active bridge member.
- There may be cases where a call is made from a bridged DN to the principle extension on the bridge. In such an instance, the dialing and ringing between two DNs on the same bridge is happening within the context of a single call. While such a circumstance is supported, the bridged appearance of the call should be ignored and not used.

**Table 20: EventBridged Contents** 

Event Attribute	Туре
Event	Mandatory
Server	Mandatory

Table 20: EventBridged Contents (Continued)

Event Attribute	Туре
CustomerID	Optional
ConnID	Mandatory
PreviousConnID <sup>a</sup>	Optional
CallID	Mandatory
CollectedDigits	Optional
CallHistory	Optional
CallType	Mandatory
CallState <sup>b</sup>	Optional
AgentID	Optional
ThisDN	Mandatory
ThisQueue <sup>c</sup>	Optional
ThisDNRole	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>b</sup>	Optional
OtherTrunk <sup>b</sup>	Optional
OtherQueue	Optional
OtherDNRole <sup>b</sup>	Optional
DNIS	Optional
ANI	Optional
UserData	Optional
Extensions	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional

Genesys 🥃

- a. The attribute must appear if the value of CallType is Consult.
- b. For the Avaya Communication Manager only: In a
   Coverage Path scenario, the second party that has answered a call must receive CallState=Conferenced, but
   does not receive information about the other party (OtherDN = NULL). See Chapter 6.
- c. The attribute must appear in case of an ACD call.

#### **EventReleased**

### **Event Description**

The telephony object specified by ThisDN has disconnected or has been dropped from the call.

**Table 21: EventReleased Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
Cause	Optional
CallType	Mandatory
ConnID	Mandatory
CollectedDigits	Optional
CustomerID	Optional
DNIS	Optional
Event	Mandatory

Table 21: EventReleased Contents (Continued)

Event Attribute	Туре
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>a</sup>	Optional
OtherDNRole <sup>a</sup>	Optional
OtherQueue <sup>a</sup>	Optional
OtherTrunk <sup>a</sup>	Optional
PreviousConnIDb	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN <sup>c</sup>	Optional
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. This attribute does not appear if the release is from a conference. In all other call scenarios, the attribute must be present only if such information is provided by a CTI link.
- b. The attribute must appear if the value of CallType is Consult.

c. The appearance of ThirdPartyDN depends on the following conditions:

If information about the new destination is available from the switch at the moment when EventReleased is generated, then ThirdPartyDN is mandatory. Or, if T-Server has initiated a single-step transfer, redirection, or previously set the forwarding target, this attribute is also mandatory.

If a call has gone through a single-step transfer, been redirected, or forwarded by another application (not the T-Server in question), this attribute is absent.

### **Example**



Figure 10: EventReleased Feature Example

For more information, refer to Chapter 6.

#### **EventRetrieved**

## **Event Description**

The call has been retrieved from hold.

**Table 22: EventRetrieved Contents** 

Event Attribute	Туре
AgentID	Optional
ANI	Optional
CallHistory	Optional

Table 22: EventRetrieved Contents (Continued)

Event Attribute	Туре
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
OtherDN <sup>a</sup>	Optional
OtherDNRole <sup>a</sup>	Optional
OtherQueue <sup>a</sup>	Optional
OtherTrunk <sup>a</sup>	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole <sup>b</sup>	Mandatory
ThisQueue <sup>c</sup>	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

Genesys 🥃

- a. In all call scenarios, this attribute must be present only if the information is provided by a CTI link.
- b. The value here is the same as that for the events preceding EventRetrieved (EventEstablished and EventRinging) for the same call.
- c. The value here is the same as that for the events preceding EventRetrieved (EventEstablished and EventRinging) for the same call. (For non-ACD calls, ThisQueue is not reported)

# **Network Attended Transfer Events**

#### **EventNetworkCallStatus**

### **Event Description**

Contains all pertinent information about the current state of a multi-party network call. It is sent to all interested parties whenever the call's state changes.

Table 23: EventNetworkCallStatus Contents

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional
CallType	Mandatory
ConnID	Mandatory
Cause	Optional
CustomerID	Optional

Table 23: EventNetworkCallStatus Contents (Continued)

Event Attribute	Туре
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallState	Mandatory
NetworkPartyRole <sup>a</sup>	Mandatory
NetworkOrigDN	Optional
NetworkDestDN	Optional
NetworkDestState	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. This attribute is not present for events distributed by network T-Servers.

### **EventNetworkPrivateInfo**

# **Event Description**

This event is generated both in response to a TNetworkPrivateService() function call and when it is used to notify selected sets of clients of T-Server—specific information. This event indicates that one of two forms of data has been passed:

- Information supported only by certain T-Servers, and which is not covered by general feature requests.
- Notification about changes in T-Server behavior or device/call statuses.

This event can be distributed to the following clients:

- Those who made a request for the private service, TNetworkPrivateService().
- Those registered on the specified device, depending on the nature of the service.
- Those who would otherwise be ineligible (for security reasons) for receiving given events, and who thus require additional registration in order to be notified.

Table 24: EventNetworkPrivateInfo Contents

Event Attribute	Туре
PrivateEvent	Mandatory
Event	Mandatory
Reasons	Optional
UserData	Optional
Extensions	Optional
ReferenceID	Optional
Server	Mandatory
ConnID	Optional
ThisDN	Optional
NetworkCallState	Optional
NetworkPartyRole	Optional
NetworkOrigDN	Optional
NetworkDestDN	Optional
NetworkDestState	Optional
time	Mandatory

### **Example**

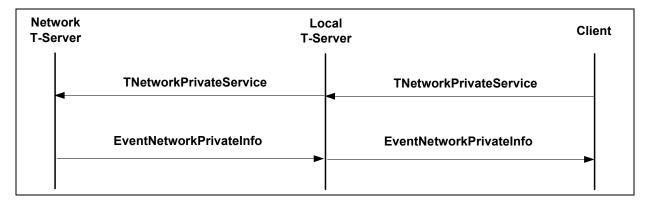


Figure 11: EventNetworkPrivateInfo Example

# **Call-Routing Events**

## **EventRouteRequest**

### **Event Description**

The call has been placed on the routing point specified by ThisDN, and the switch is waiting for routing instructions.

**Table 25: EventRouteRequest Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
CollectedDigits	Optional
ConnID	Mandatory
CustomerID	Optional

Table 25: EventRouteRequest Contents (Continued)

Event Attribute	Туре
DNIS	Optional
Event	Mandatory
Extensions	Optional
LastCollectedDigit	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN	Optional
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
PreviousConnID <sup>a</sup>	Optional
Server	Mandatory
ThisDN <sup>b</sup>	Mandatory
ThisQueue <sup>b</sup>	Mandatory
ThisTrunk	Optional
ThirdPartyDN	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The PreviousConnID attribute must appear if a call with CallType=Consult has been placed on a routing point.

## **Examples**

See "EventRegistered" on page 33 and Figure 12 on page 67.

b. ThisDN and ThisQueue attributes must have equal values.

### **EventRouteUsed**

# **Event Description**

The call has been routed as requested in the function TRouteCall() or has been default routed by the switch after the routing timeout has expired (that is, there was no routing instruction from the computer domain within the specified timeout).

**Table 26: EventRouteUsed Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Optional
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN <sup>a</sup>	Optional
OtherDN <sup>b</sup>	Optional
ThirdPartyDNRole = Destination	Optional

Table 26: EventRouteUsed Contents (Continued)

Event Attribute	Туре
ThisDN <sup>c</sup>	Mandatory
ThisQueue <sup>c</sup>	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. This attribute specifies the destination DN or dialing number. It is:

Mandatory if routing was done by URS (or another routing application connected to T-Server).

Absent if the call was rejected.

Optional in other cases.

- b. The OtherDN attribute is used to specify the target party when the forward feature is in progress.
- c. These attributes must be equal.

### **Example**

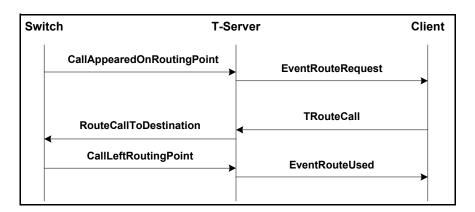


Figure 12: EventRouteRequest and EventRouteUsed Feature, Example 1

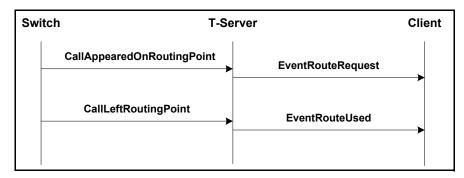


Figure 13: EventRouteRequest and EventRouteUsed Feature, Example 2 (if the Routing Timeout Expires Before the TRouteCall Request Generated by Computer Domain [Interaction Router])

# **Call-Treatment Events**

## **EventTreatmentApplied**

#### **Event Description**

The call has been treated, and the Treatment Device (TD) is processing the treatment instruction.

Table 27: EventTreatmentApplied Contents

Event Attribute	Туре
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Mandatory
Event	Mandatory
Extensions	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional

Table 27: EventTreatmentApplied Contents (Continued)

Event Attribute	Туре
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
time	Mandatory
TransferConnID	Optional
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
TreatmentParameters	Optional
TreatmentType	Mandatory
UserData	Optional

# **EventTreatmentEnd**

### **Event Description**

The call has been treated and the Treatment Device (TD) is waiting for another instruction.

**Note:** This event does not appear in cases of continuing treatments like Silence or RingBack.

Table 28: EventTreatmentEnd Contents

Event Attribute	Туре
CallID	Mandatory
CallType	Mandatory

Table 28: EventTreatmentEnd Contents (Continued)

Event Attribute	Туре
CollectedDigits <sup>a</sup>	Optional
ConnID	Mandatory
CustomerID	Mandatory
Event	Mandatory
Extensions <sup>b</sup>	Optional
LastCollectedDigit <sup>a</sup>	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
TransferConnID	Optional
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
TreatmentParameters	Optional
TreatmentType	Mandatory
UserData	Optional

a. The attributes are present if TreatmentType is either CollectDigits or PlayAnnouncementAndCollectDigits.

b. The following key-value pairs are set for all Treatment Types, except in the case of the Nortel Communication Server 2000/2100 (formerly, DMS-100):

For all Treatment Types where an announcement was played, INTERRUPTED is set to:

No, if the announcement was not interrupted.

KEYPAD, if it was interrupted by keypad entry.

VOICE, if it was interrupted by the caller speaking something.

For all Treatment Types where digits are to be collected from the caller, COMPLETION\_STATUS is set to:

NORMAL, if the treatment completed normally (optional).

TIMEOUT, if the digit collection timed out before all required digits could be collected.

CANCELLED, if the treatment was cancelled by a request from router.

For TreatmentType=DigitsVerification only, the following key-value pairs apply:

VERIFICATION\_STATUS (the result of digits verification) is set to 1 if verification succeed, 0 if it did not.

ATTEMPTS is set to the number of digit-collection attempts made.

For TreatmentType=RecordUserAnnouncement, the following key-value pair applies:

USER\_ANN\_ID is set to the message identifier, an integer, recorded by the user specified with USER\_ID.

### **EventTreatmentNotApplied**

### **Event Description**

The call has not been treated for some reason. The reason is returned in ErrorCode and ErrorMessage parameters.

Table 29: EventTreatmentNotApplied Contents

Event Attribute	Туре
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory

Table 29: EventTreatmentNotApplied Contents (Continued)

Event Attribute	Туре
CustomerID	Mandatory
ErrorCode	Mandatory
ErrorMessage	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Mandatory
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
TransferConnID	Optional
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
TreatmentParameters	Optional
TreatmentType	Mandatory
UserData	Optional

# **EventTreatmentRequired**

## **Event Description**

A call has been placed to a treatment device port specified by ThisDN, and the switch or the treatment device is waiting for treatment instructions.

Table 30: EventTreatmentRequired Contents

Event Attribute	Туре
ANI	Optional
CallID	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Mandatory
Event	Mandatory
Extensions	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
UserData	Optional

# **DTMF Events**

# **EventDigitsCollected**

#### **Event Description**

The digits specified by CollectedDigits have been collected. This event is sent either to the DN representing the device collecting the digits or to all monitored parties for the call.

Table 31: EventDigitsCollected Contents

Event Attribute	Туре
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
CollectedDigits	Mandatory
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
LastCollectedDigit	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>a</sup>	Optional
OtherDNRole	Optional
OtherQueue	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional

Table 31: EventDigitsCollected Contents (Continued)

Event Attribute	Туре
TransferredNetworkNodeID	Optional
UserData	Optional

a. This attribute indicates the source of the collected digits, if T-Server can identify that source.

#### **EventDTMFSent**

### **Event Description**

The specified DTMF sequence has been sent.

**Table 32: EventDTMFSent Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory

Table 32: EventDTMFSent Contents (Continued)

Event Attribute	Туре
ThisDN	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

# **Voice-Mail Events**

# **EventMailBoxLogin**

#### **Event Description**

The telephony object specified by ThisDN has logged in to the mailbox specified by the mbox\_number parameter in the corresponding TLoginMailBox() function.

Table 33: EventMailBoxLogin Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Mandatory
Server	Mandatory
ThisDN	Mandatory

Table 33: EventMailBoxLogin Contents (Continued)

Event Attribute	Туре
time	Mandatory
Extensions	Optional

# **Example**

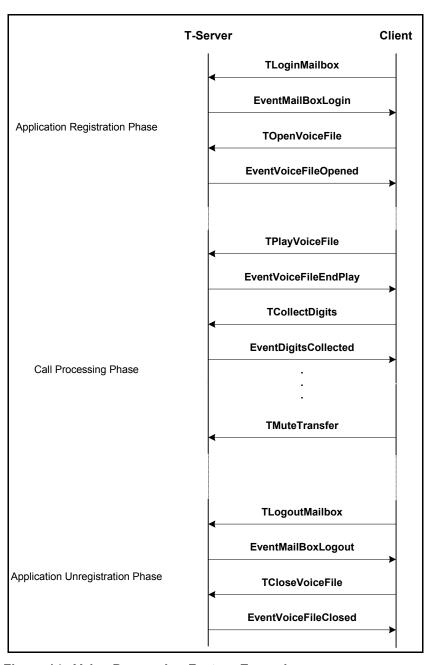


Figure 14: Voice-Processing Feature Example

# **EventMailBoxLogout**

#### **Event Description**

The telephony object specified by ThisDN has logged out of the mailbox it logged in to earlier.

#### **Event Contents**

Table 34: EventMailBoxLogout Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

## **Example**

See Figure 14 on page 77.

# **EventVoiceFileOpened**

### **Event Description**

The voice file specified by the file\_handle parameter in the corresponding TOpenVoiceFile() function has been opened.

Table 35: EventVoiceFileOpened Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Extensions	Optional
FileHandle	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
UserData	Optional

### **Example**

See Figure 14 on page 77.

#### **EventVoiceFileClosed**

#### **Event Description**

The voice file specified by the file\_handle parameter in the corresponding TCloseVoiceFile() function has been closed.

Table 36: EventVoiceFileClosed Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory

Table 36: EventVoiceFileClosed Contents (Continued)

Event Attribute	Туре
Extensions	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
UserData	Optional

#### **Example**

See Figure 14 on page 77.

# **EventVoiceFileEndPlay**

### **Event Description**

The voice file specified by the file\_handle parameter in the corresponding TPlayVoice() function has been played back completely.

Table 37: EventVoiceFileEndPlay Contents

Event Attribute	Туре
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional

Table 37: EventVoiceFileEndPlay Contents (Continued)

Event Attribute	Туре
FileHandle	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional
ReferenceID	Mandatory
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Mandatory
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

#### **Example**

See Figure 14 on page 77.

# **Agent-State & DN Events**

# **EventAgentLogin**

#### **Event Description**

The agent has logged in to the ACD group specified by ThisQueue.

**Note:** Multiple agent logins are allowed for the same DN and agent ID combination (since EventAgentLogin does not indicate by itself a transition of agent state).

Table 38: EventAgentLogin Contents

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisQueue	Optional
time	Mandatory
WorkMode	Optional
Extensions <sup>b</sup>	Optional

- a. Agent ID must be present if the agent is logged in through T-Server or if the information is available.
- b. If present, the Extensions attribute may include a ReasonCode value specifically used to communicate hardware reasons.

### **Example**




Figure 15: EventAgentLogin Feature Example

### **EventAgentLogout**

#### **Event Description**

The agent has logged out of the ACD group specified by ThisQueue.

**Note:** With CTI platforms that support agent login for multiple queues, this event signals that the agent has been moved to the Logged Out state, and is thus used only for an agent's final logout. (EventQueueLogout, on the other hand, indicates that an agent remains logged in to some other ACD queue. See "EventQueueLogout" on page 84.)

**Table 39: EventAgentLogout Contents** 

Event Attribute	Туре
Event	Mandatory
Server	Mandatory
ReferenceID	Optional
CustomerID	Optional
AgentID <sup>a</sup>	Optional
ThisDN	Mandatory
ThisQueue	Optional
Reasons	Optional
time	Mandatory
Extensions <sup>b</sup>	Optional

- a. AgentID must be present if the agent is logged out through T-Server or if the information is available.
- b. If present, the Extensions attribute may include a ReasonCode value specifically used to communicate hardware reasons.

#### **Examples**




Figure 16: EventAgentLogout (Through Link) Feature, Example 1

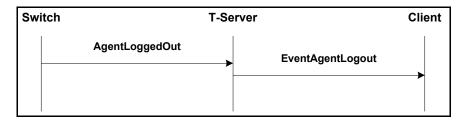


Figure 17: EventAgentLogout (Through PhoneSet) Feature, Example 2

### **EventQueueLogout**

#### **Event Description**

The agent has logged out of the ACD queue specified by ThisQueue, but remains logged in to some other ACD queue.

**Table 40: EventQueueLogout Contents** 

Event Attribute	Туре
Event	Mandatory
Server	Mandatory
ReferenceID	Optional
CustomerID	Optional
AgentID <sup>a</sup>	Optional
ThisDN	Mandatory

Table 40: EventQueueLogout Contents (Continued)

Event Attribute	Туре
ThisQueue	Optional
Reasons	Optional
time	Mandatory
Extensions <sup>b</sup>	Optional

- a. Agent ID must be present if the agent is logged out through T-Server or if the information is available.
- b. If present, the Extensions attribute may include a ReasonCode value specifically used to communicate hardware reasons.

# **EventAgentReady**

#### **Event Description**

The agent is ready to receive ACD calls.

**Table 41: EventAgentReady Contents** 

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisQueue	Optional
time	Mandatory

Table 41: EventAgentReady Contents (Continued)

Event Attribute	Туре
WorkMode <sup>b</sup>	Mandatory
Extensions <sup>c</sup>	Optional

- AgentID must be present if the agent-state change is requested through T-Server or if the information is available.
- b. WorkMode is mandatory for the Avaya Communication Manager T-Server when not in Soft Agent mode.
- c. If present, the Extensions attribute may include a ReasonCode value specifically used to communicate hardware reasons.

#### **Examples**




Figure 18: EventAgentReady (Through Link) Feature, Example 1

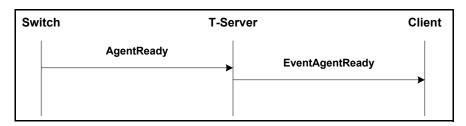


Figure 19: EventAgentReady (Through PhoneSet) Feature, Example 2

### **EventAgentNotReady**

### **Event Description**

The agent is not ready to receive ACD calls.

Genesys S

Table 42: EventAgentNotReady Contents

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisQueue	Optional
time	Mandatory
WorkMode <sup>b</sup>	Optional
Extensions <sup>c</sup>	Optional

- AgentID must be present if the agent-state change is requested through T-Server or if the information is available.
- b. This attribute is mandatory for the Avaya Communication Manager T-Server when not in Soft Agent mode.
- c. If present, the Extensions attribute may include a ReasonCode value specifically used to communicate hardware reasons.

#### **Examples**



Figure 20: EventAgentNotReady (Through Link) Feature, Example 1




Figure 21: EventAgentNotReady (Through PhoneSet) Feature, Example 2

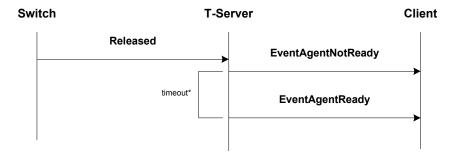


Figure 22: EventAgentNotReady Feature, Example 3 (for the Nortel Communication Server 2000/2100 (formerly, DMS-100) only)

**Note:** A timeout in Figure 22 (\*) is specified as the wrap-up time in the Configuration Layer. T-Server distributes EventAgentReady automatically if there is no activity on the DN that can be considered an agent-state change within the specified timeout. See also "EventAgentLogin" on page 81.

Genesys

### **EventAgentAfterCallWork (Obsolete—No Longer Supported)**

### **Event Description**

The agent is performing administrative duties for a previous call (that is, updating some information) and, therefore, is not ready to receive further ACD calls.

### **EventAgentIdleReasonSet (Obsolete—No Longer Supported)**

#### **Event Description**

Indicates that the Idle reason for the telephony object specified by the parameter ThisDN has been successfully set.

**Table 43: EventAgentIdleReasonSet Contents** 

Event Attribute	Туре
AgentID	Optional
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisQueue	Optional
time	Mandatory
Extensions	Optional

#### **EventDNOutOfService**

#### **Event Description**

The DN specified in the ThisDN attribute is out of service and cannot make or receive calls. This event is generated when an out-of-service state is first detected or when a new client registers on a DN known to be out of service.

When a DN is out of service, only the following T-Library requests can be issued for it: client registration and unregistration, queries, agent login, and private service requests.

**Note:** T-Server returns a TERR\_OUT\_OF\_SERVICE error if it is called on to attempt a supported operation that cannot progress on an out-of-service DN

When a DN goes out of service, T-Server notifies the user about the termination of active calls or changes an agent state (not ready/logout) using normal T-Library events. The other applications should rely only on those events to change the DN/agent state.

#### **Event Contents**

Table 44: EventDNOutOfService Contents

Event Attribute	Туре
ThisDN	Mandatory
Extensions	Optional

### **Example**

See "EventDNBackInService."

#### **EventDNBackInService**

#### **Event Description**

The DN specified in the ThisDN attribute is back in service and can make or receive calls. This event is generated when a DN, which has been out of service and for which the EventDNOutOfService was previously distributed, returns to service.

Genesys S

In the absence of EventDNOutOfService and EventDNBackInService, all clients should assume, for backward-compatibility reasons, that the DN is in service.

#### **Event Contents**

**Table 45: EventDNBackInService Contents** 

Event Attribute	Туре
ThisDN	Mandatory
Extensions	Optional

#### **Example**

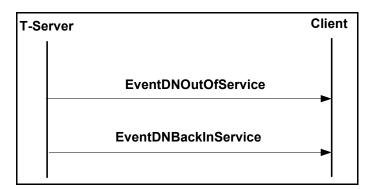


Figure 23: EventDNBackInService Feature Example

Note: Between EventDNOutOfService and EventDNBackInService, the client is not able to perform any requests, and no events should be expected during this outage. Genesys recommends that you perform TQueryAddress() after EventDNBackInService to ensure synchronization between T-Server and client.

#### **EventDNDOn**

### **Event Description**

The Do-Not-Disturb (DND) feature has been turned on for the telephony object specified by ThisDN.

**Table 46: EventDNDOn Contents** 

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

### **Examples**




Figure 24: EventDNDOn (Through Link) Feature, Example 1

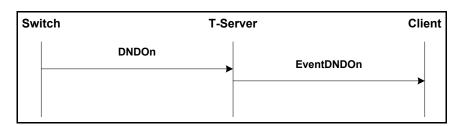


Figure 25: EventDNDOn (Through PhoneSet) Feature, Example 2

#### **EventDNDOff**

### **Event Description**

The Do-Not-Disturb (DND) feature has been turned off for the telephony object specified by ThisDN.

#### **Event Contents**

**Table 47: EventDNDOff Contents** 

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

### **Examples**




Figure 26: EventDNDOff (Through Link) Feature, Example 1

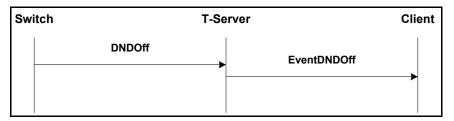


Figure 27: EventDNDOff (Through PhoneSet) Feature, Example 2

#### **EventForwardSet**

#### **Event Description**

The Forwarding feature has been turned on for the telephony object specified by ThisDN.

#### **Event Contents**

**Table 48: EventForwardSet Contents** 

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Extensions	Optional
InfoStatus (CallForwardingStatus, SendAllCallsStatus)	Optional
OtherDN <sup>a</sup>	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
ForwardMode	Optional

a. The OtherDN attribute is used to specify the target party when the Forward feature is in progress.

#### **Examples**




Figure 28: EventForwardSet (Through Link) Feature, Example 1

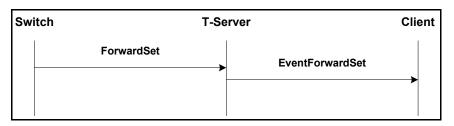


Figure 29: EventForwardSet (Through PhoneSet) Feature, Example 2

#### **EventForwardCancel**

#### **Event Description**

The Forwarding feature has been turned off for the telephony object specified by ThisDN.

Table 49: EventForwardCancel Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Extensions	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory

Table 49: EventForwardCancel Contents (Continued)

Event Attribute	Туре
ThisDN	Mandatory
time	Mandatory

#### **Examples**




Figure 30: EventForwardCancel (Through Link) Feature, Example 1

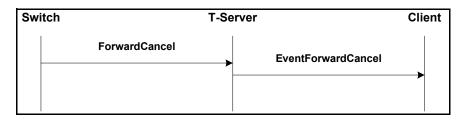


Figure 31: EventForwardCancel (Through PhoneSet) Feature, Example 2

### **EventMonitoringNextCall**

### **Event Description**

A request to monitor the next call(s) has been accepted. The event is delivered to the applications on the supervisor's and agent's desktops.

Note: A supervisor who monitors calls as a result of the request TMonitorNextCall() is able to hear and participate in conversations on the monitored DN. If it is necessary to receive events associated with conversations, the supervisor's soft phone must be registered with the various DNs that might be monitored.

Genesys S

Table 50: EventMonitoringNextCall Contents

Event Attribute	Туре
ThisDN <sup>a</sup>	Mandatory
ThisDNRole <sup>a</sup>	Mandatory
OtherDN <sup>b</sup>	Mandatory
OtherDNRole <sup>b</sup>	Mandatory
ReferenceID	Optional
MonitorNextCallType	Mandatory
Reasons	Optional
Extensions	Optional

- a. When the event is delivered to an application on the supervisor's desktop, ThisDN is set to the supervisor's DN and ThisDNRole is set to DNRoleObserver. When the event is delivered to an application on the agent's desktop, ThisDN is set to the agent's DN and ThisDNRole is set to DNRoleDestination.
- b. When the event is delivered to an application on the supervisor's desktop, OtherDN is set to the agent's DN and OtherDNRole is set to DNRoleDestination. When the event is delivered to an application on the agent's desktop, OtherDN is set to the supervisor's DN and OtherDN-Role is set to DNRoleObserver.

#### **Example**

See "EventMonitoringCancelled."

## **EventMonitoringCancelled**

### **Event Description**

The call monitoring has been canceled either by a separate call to the TMonitorNextCall() function or to the TCancelMonitoring() function. The event is delivered to the applications on the supervisor's and agent's desktops.

**Table 51: EventMonitoringCancelled Contents** 

Event Attribute	Туре
ThisDN <sup>a</sup>	Mandatory
ThisDNRole <sup>a</sup>	Mandatory
OtherDN <sup>b</sup>	Mandatory
OtherDNRole <sup>b</sup>	Mandatory
ReferenceID	Optional
Reasons	Optional
Extensions	Optional

- a. When the event is delivered to an application on the supervisor's desktop, ThisDN is set to the supervisor's DN and ThisDNRole is set to DNRoleObserver. When the event is delivered to an application on the agent's desktop, ThisDN is set to the agent's DN and ThisDNRole is set to DNRoleDestination.
- b. When the event is delivered to an application on the supervisor's desktop, OtherDN is set to the agent's DN and OtherDNRole is set to DNRoleDestination. When the event is delivered to an application on the agent's desktop, OtherDN is set to the supervisor's DN and OtherDN-Role is set to DNRoleObserver.

Genesys S

#### **Example**

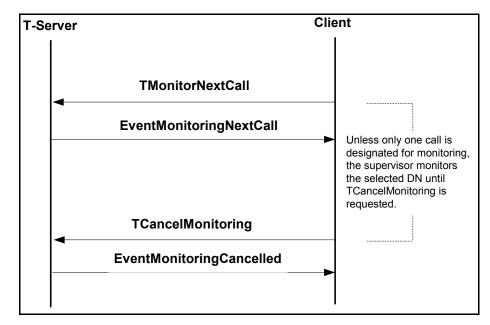


Figure 32: EventMonitoringCancelled Feature Example

#### **EventOffHook**

## **Event Description**

The telephony object specified by ThisDN has gone off-hook.

**Table 52: EventOffHook Contents** 

Event Attribute	Туре
AgentID	Optional
CallHistory	Optional
CallID	Optional
CallState	Optional
CallType	Optional
ConnID	Optional
CustomerID	Optional

Table 52: EventOffHook Contents (Continued)

Event Attribute	Туре
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

### **EventOnHook**

### **Event Description**

The telephony object specified by ThisDN has gone on-hook.

**Table 53: EventOnHook Contents** 

Event Attribute	Туре
AgentID	Optional
CallHistory	Optional
CallID	Optional
ConnID	Optional
CustomerID	Optional
Event	Mandatory

Table 53: EventOnHook Contents (Continued)

Event Attribute	Туре
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Server	Mandatory
ThisDN	Mandatory
ThisDNRole	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

# **EventMuteOn**

### **Event Description**

A party identified by ThisDN is now in the Mute mode.

**Table 54: EventMuteOn Contents** 

Event Attribute	Туре
ConnID	Mandatory
CustomerID	Optional
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
Reasons	Optional

Table 54: EventMuteOn Contents (Continued)

Event Attribute	Туре
ReferenceID	Optional
ThisDN	Mandatory
ThisDNRole	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

#### **EventMuteOff**

### **Event Description**

A party identified by ThisDN is no longer in Mute (microphone-disabled) mode. The ReferenceID attribute is set to indicate the corresponding TSetMuteOff() function.

Table 55: EventMuteOff Contents

Event Attribute	Туре
ConnID	Mandatory
CustomerID	Optional
Reasons	Optional
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
ReferenceID	Optional
ThisDN	Mandatory
ThisDNRole	Mandatory
TransferredNetworkCallID	Optional

Table 55: EventMuteOff Contents (Continued)

Event Attribute	Туре
TransferredNetworkNodeID	Optional
UserData	Optional

# **EventListenDisconnected**

### **Event Description**

The switch has registered Deaf mode for the specified telephony object (in OtherDN).

**Table 56: EventListenDisconnected Contents** 

Event Attribute	Туре
CallHistory	Optional
CallID	Mandatory
CallState <sup>a</sup>	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>b</sup>	Mandatory
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional

Table 56: EventListenDisconnected Contents (Continued)

Event Attribute	Туре
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN <sup>c</sup>	Mandatory
ThisDN <sup>d</sup>	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The following CallStates are used:

CallStateOk: the party can still participate in conversation with some active members of the conference.
CallStateDeafened: the party cannot listen to the conversation, but can be heard by the conference members.

CallStateHeld: the party cannot hear or be heard by the conference members.

- b. Applies to the disconnected party.
- c. The party that cannot be heard by the disconnected party.
- d. The party that initiated the request.

#### **EventListenReconnected**

### **Event Description**

The switch has canceled Deaf mode for the specified telephony object.

**Table 57: EventListenReconnected Contents** 

Event Attribute	Туре
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
OtherDN <sup>a</sup>	Mandatory
OtherDNRole	Optional
OtherQueue	Optional
OtherTrunk	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN <sup>b</sup>	Optional
ThisDN <sup>c</sup>	Mandatory
ThisDNRole	Mandatory
ThisQueue	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional

Table 57: EventListenReconnected Contents (Continued)

Event Attribute	Туре
TransferredNetworkNodeID	Optional
UserData	Optional

- a. The reconnected party.
- b. The party that is heard by the reconnected party.
- c. The party that initiated the request.

# **EventMessageWaitingOn**

#### **Event Description**

The Waiting indicator has been turned on for the telephony object specified by ThisDN.

Table 58: EventMessageWaitingOn Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Extensions	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN	Mandatory
time	Mandatory

#### **Examples**




Figure 33: EventMessageWaitingOn (Through Link) Feature, Example 1




Figure 34: EventMessageWaitingOn (Through PhoneSet) Feature, Example 2

### **EventMessageWaitingOff**

#### **Event Description**

The Waiting indicator has been turned off for the telephony object specified by ThisDN.

Table 59: EventMessageWaitingOff Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory
Reasons	Optional
ReferenceID	Optional
Server	Mandatory

Table 59: EventMessageWaitingOff Contents (Continued)

Event Attribute	Туре
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

#### **Examples**




Figure 35: EventMessageWaitingOff (Through Link) Feature, Example 1

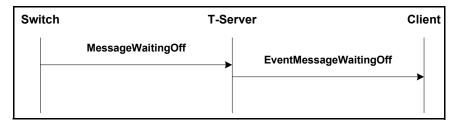


Figure 36: EventMessageWaitingOff (Through PhoneSet) Feature, Example 2

# **Query Events**

#### **EventAddressInfo**

# **Event Description**

This event is generated as a response to the TQueryAddress() function and includes information specified by InfoType and InfoStatus about the telephony object specified by either ThisDN or ThisQueue.

**Table 60: EventAddressInfo Contents** 

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
CallID	Optional
ConnID <sup>b</sup>	Optional
CustomerID	Optional
Event	Mandatory
Extensions <sup>c</sup>	Optional
InfoStatus	Mandatory
InfoType <sup>c</sup>	Mandatory
NetworkCallID	Optional
NetworkNodeID	Optional
PreviousConnID <sup>b</sup>	Optional
ReferenceID	Mandatory
Reasons <sup>d</sup>	Optional
Server	Mandatory
ThisDN	Mandatory
ThisQueue	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

a. The AgentID attribute can only be present for objects of AddressTypePosition or AddressTypeDN.

- b. The ConnID and PreviousConnID attributes are mandatory when the InfoType parameter is set to AddressInfoCallsQuery. ConnID is the connection ID for the active call; PreviousConnID is the connection ID for the held call, if any.
- c. Based on the InfoType value, additional information is provided in the InfoStatus, which is a union element, and in Extensions attributes. See Table 61 for InfoType=AddressInfoQueueStatus and AddressInfoDNStatus, which are available on all T-Servers. See Table 62 on page 113 for all other InfoTypes that are available on a device-specific basis. If a particular InfoType is not supported, T-Server responds with EventError.
- d. If present, the value here is the last known KVList data supplied by recent activity for this address.

Table 61: InfoStatus and Extensions in EventAddressInfo Available for All T-Servers

Attribute InfoStatus	Attribute Ex	Attribute Extensions		
	Key	Value Type	Value Description	
	InfoType	e=AddressInfoQ	QueueStatus	
NumberOfCalls <sup>a</sup>	conn-%d	string	The connection ID of a call (converted into a string)	
	ct-%d	integer	The CallType for the corresponding ConnectionID	
	mt-%d	integer	The media type of the corresponding ConnectionID. (The value may be absent here if the media type is voice. <sup>b</sup> )  0 (or absent) if voice  >0 for non-voice media	
	ps-%d	integer	The Call-Party state for the corresponding Connection ID. See "Unified Call-Party States" on page 139 for more details.	
	status	integer	The DN status <sup>c</sup>	

Table 61: InfoStatus and Extensions in EventAddressInfo Available for All T-Servers (Continued)

Attribute InfoStatus	Attribute Extensions		
	Key	Value Type	Value Description
	InfoType=	=AddressInfo	DDNStatus
NumberOfCalls <sup>a</sup>	conn-%d	string	The connection ID of a call (converted into a string)
	ct-%d	integer	The CallType for the corresponding connection ID
	mt-%d	integer	The media type of the corresponding connection ID. (The value may be absent here if the media type is voice. <sup>b)</sup>
			0 (or absent) if voice
			>0 for non-voice media
	ps-%d	integer	The Call-Party state for the corresponding Connection ID. See "Unified Call-Party States" on page 139 for more details.
	queue-%d	string	The enumerated queues associated with an agent logged into a DN
	AgentStatus	integer	The Agent status <sup>d</sup>
	status	integer	The DN status <sup>c</sup>
	dnd	integer	Do Not Disturb status <sup>e</sup>
			Not present if T-Server has no information about the DND status
	fwd	string	Specifies forwarding targets based on corresponding conditions. <sup>f</sup>
			Not present if T-Server has no information about Forward status
	mwl	integer	Message Waiting Lamp status <sup>g</sup>
			Not present if T-Server has no information about MWL status

a. The information is based on what T-Server can provide; it may be inaccurate when T-Server is not in sync with the switch. It is possible for T-Server to return a non-error message with missing parameters in response to a request regarding an incorrectly configured DN or queried DN.

- b. Client applications should set this value to 0 (zero) if it is absent in the event. This insures that the media type is understood to be voice.
- c. The following are the DN statuses:
  - (UNKNOWN): there is no available information about the DN status.
  - 0 (IDLE): there is no activity on the DN.
  - >0 (NOT\_IDLE): there is some activity on the DN—there is at least one call on the DN or the device is off-hook. Note the following special values:
  - 0x80: DN is out of service.
  - OxCO: DN is undergoing maintenance.
  - 0x90: Device associated with DN is locked out.
  - 0x88: DN is vacant.
- d. The following are the Agent statuses:
  - <0 (UNKNOWN): the status of an agent is unknown.</p>
  - 0 (LOGGED\_OUT): there is no agent logged on this DN.
  - 1 (LOGGED\_IN): an agent is logged in but work mode is unknown.
  - 2 (READY): the status of agent is Ready.
  - 3 (NOT\_READY): the status of agent is NotReady.
  - 4 (ACW): the status of agent is AfterCallWork.
  - 5 (WALK\_AWAY): the status of agent is WalkAway.

Note: The AgentStatus Extensions key is delivered only for objects with an Address type of AddressTypePosition or AddressTypeDN.

- e. The following are the DND statuses:
  - 0: DND off
  - 1: DND on
- f. Possible values are:
  - off, on, or the designated destination DN (for unconditional forwarding), or the designated destination–DN list (with conditions for forwarding). The following conditions may be used:
  - OnBusy, OnNoAnswer, OnBusyAndNoAnswer, SendAllCalls.

#### Examples:

- 1. Unconditional Destination DN: 3000
- 2. Conditions with Destination-DN list: OnBusy: 1000 OnNoAnswer: 2000 (This forwards calls to two different DNs based on certain conditions being met.)
- g. The following are the MWL statuses:
  - 0: MWL off
  - 1: MWL on

Table 62: InfoStatus and Extensions in EventAddressInfo Available for Particular T-Servers

Attribute InfoStatus	Attribute Extensions		
	Key	Value Type	Value Description
	InfoType=Ad	dressInfoA	ddressStatus
AddressStatus			
	InfoType=Addres	sInfoMessa	geWaitingStatus
MsgWaitingStatus			
	InfoType=Addr	ressInfoAss	ociationStatus
AssociationStatus			
	InfoType=Addres	ssInfoCallFo	orwardingStatus
CallForwardingStatus			
	InfoType=A	ddressInfo <i>A</i>	AgentStatus
AgentStatus			
	InfoType=AddressI	nfoNumber	OfAgentsInQueue
NumberOfAgentsInQueue	AgentsInQueue	integer	Requested number is returned in
	AvailableAgents	integer	AddressInfoStatus attribute; in addition, the Extensions attribute contains all of
	CallsInQueue	integer	three keys
Info	Гуре=AddressInfoN	umberOfAv	vailableAgentsInQueue
NumberOfAvailable-	AgentsInQueue	integer	Requested number is returned in
AgentsInQueue	AvailableAgents	integer	AddressInfoStatus attribute; in addition, the Extensions attribute contains all of
	CallsInQueue	integer	three keys
InfoType=AddressInfoNumberOfCallsInQueue			
NumberOfCallsInQueue	AgentsInQueue	integer	Requested number is returned in
	AvailableAgents	integer	AddressInfoStatus attribute; in addition, the Extensions attribute contains all of
	CallsInQueue	integer	three keys
InfoType=AddressInfoAddressType			

Table 62: InfoStatus and Extensions in EventAddressInfo Available for Particular T-Servers (Continued)

Attribute InfoStatus Attribute Extensions			
	Key	Value Type	Value Description
AddressType			
	InfoType=A	ddressInfoC	allsQuery
NumberOfListElements	call-%d	integer	The Call ID of a call
	conn-%d	string	The Connection ID of a call (converted into a string)
	state-%d	integer	The state of the DN in question as a party of the call. See AddressStatusInfoType in the <i>Voice Platform SDK API Reference</i> for details.
	InfoType=Addr	ressInfoQueu	ueLoginAudit
NumberOfListElements	agent-extension	string	The agent ID
	InfoType=Address	InfoNumber	OfIdleClassifiers
NumberOfIdleClassifiers	Idle	integer	NumberOfIdleClassifiers
	InUse	integer	NumberOfClassifiersInUse
I	nfoType=AddressI	nfoNumberC	ofClassifiersInUse
NumberOfClassifiersInUse	Idle	integer	NumberOfIdleClassifiers
	InUse	integer	NumberOfClassifiersInUse
	InfoType=Addres	ssInfoNumbe	erOfIdleTrunks
NumberOfIdleTrunks	Idle	integer	NumberOfIdleTrunks
	InUse	integer	NumberOfTrunksInUse
InfoType=AddressInfoNumberOfTrunksInUse			
NumberOfTrunksInUse	Idle	integer	NumberOfIdleTrunks
	InUse	integer	NumberOfTrunksInUse
	InfoType=Ad	dressInfoDat	tabaseValue
	ID	string	A database value

#### **Example**



Figure 37: EventAddressInfo Feature Example

## **EventPartyInfo**

## **Event Description**

The information about the call specified by ConnID. T-Server returns EventPartyInfo only to the client that issued a call to the TQueryCall() function.

**Table 63: EventPartyInfo Contents** 

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions <sup>a</sup>	Mandatory
InfoStatus.NumberOfListElements <sup>b</sup>	Mandatory
NetworkCallID	Optional

Table 63: EventPartyInfo Contents (Continued)

Event Attribute	Туре
NetworkNodeID	Optional
OtherDN <sup>c</sup>	Optional
OtherDNRole <sup>c</sup>	Optional
PreviousConnID <sup>d</sup>	Optional
ReferenceID	Mandatory
Server	Mandatory
ThisDN <sup>e</sup>	Optional
ThisDNRole <sup>e</sup>	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional

- a. The directory numbers of parties participating in the call specified by ConnID are specified as key-value pairs with the key party-<n> in the Extensions attribute, where <n> is the party number. Some switches might not report a Queue or a Routing Point as a call party.
- b. This attribute consists of the number of known parties participating in a call.
- c. T-Server returns the OtherDN and OtherDNRole attributes if the condition described in Table Footnote a. takes place, and the number of parties involved in the call specified by ConnID is 2.
- d. The attribute must appear if the value of CallType is Consult.
- e. T-Server returns the ThisDN and ThisDNRole attributes if the party specified as a DN in the TQueryCall() request is a call member.

#### **Example**




Figure 38: EventPartyInfo Feature Example

#### **EventLocationInfo**

### **Event Description**

This event is generated as a response to the TQueryLocation() function and includes information specified by InfoType about the remote location specified by the Location parameter.

**Table 64: EventLocationInfo Contents** 

Event Attribute	Туре
Event	Mandatory
Extensions	Optional
InfoType	Mandatory
Location	Optional
Server	Mandatory
time	Mandatory
ReferenceID	Optional

Additional information based on InfoType is provided in the Extensions attributes. When information is requested about one remote location, the Extensions attribute can contain the following key-value pairs:

Table 65: Extensions in EventLocationInfo

Key	Value	Value Type
LQ-location-name	location	string
LQ-location-status	loc-status, 0 - disconnected (configured) 1 - connected	integer
LQ-link-status	link-status, 0 - disconnected 1 - connected	integer

When information is requested about more than one location, these same key-value pairs for each location are referred to in the <code>loc-list[i]</code> value of the <code>LQ-location-%d</code> key within the <code>Extensions</code> attribute, where <code>i</code> is the number of a remote location (<code>i=0</code> defines the first location).

Table 66: InfoType and Extensions in EventLocationInfo

Key	Value	Value Type	
InfoType=LocationInfoAllLocations or InfoType=LocationInfoMonitorAllLocations			
LQ-location-%d	loc-list[i]	kv-list	
InfoType=LocationInfoLocationData or InfoType=LocationInfoMonitorLocation			
LQ-location-name	location	string	
LQ-location-status	loc-status, 0 - disconnected (configured) 1 - connected	integer	
LQ-link-status	link-status, 0 - disconnected 1 - connected	integer	

#### **EventServerInfo**

### **Event Description**

Delivers the information about T-Server specified in ServerVersion, ServerRole, and Capabilities.

**Table 67: EventServerInfo Contents** 

Event Attribute	Туре
Capabilities	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions <sup>a</sup>	Mandatory
HomeLocation	Optional
ReferenceID	Mandatory
Server	Mandatory
ServerRole	Mandatory
ServerVersion	Mandatory
time	Mandatory
ServerCapabilityMask	Mandatory <sup>b</sup>

- a. See "Extensions in EventServerInfo" on page 120 for details.
  - When related to information about a T-Server's ability to support transaction monitoring, this attribute indicates that support, and its key-value pairs contain information about the supported transaction monitoring classes. (For transaction monitoring purposes, this attribute is not present when the T-Server in question does not support that feature.)
- b. If the capability mask includes TransactionMonitoring and EventTransactionStatus, the T-Server in question supports transaction monitoring.

Table 68: Extensions in EventServerInfo

Key	Value	Value Type
T-Server	The full string designating information about the current version of T-Server (the same as if T-Server has been started with the -V command line option)	string
Features	The list of features with which T-Server is built (the same list as that which results from T-Server being started with the -V command line option)	string

## **Example**




Figure 39: EventServerInfo Feature Example

## **EventSwitchInfo**

## **Event Description**

This event is generated as a response to the TQuerySwitch() function and includes the requested information.

Table 69: EventSwitchInfo Contents

Event Attribute	Туре
CustomerID	Optional
Event	Mandatory

Table 69: EventSwitchInfo Contents (Continued)

Event Attribute	Туре
Extensions	Mandatory
Reasons	Optional
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory

Table 70: Extensions in EventSwitchInfo

InfoStatus	Attribute Extensions		
	Key	Value Type	Value Description
SwitchInfoDataTime	Date/Time	string	Current date and time information on the switch in the MM/DD/YYYY HH:MM:SS format
SwitchInfoClassifierStat	Idle	integer	NumberOfIdleClassifiers
	InUse	integer	NumberOfClassifiersInUse

## **User-Data Events**

## EventAttachedDataChanged

## **Event Description**

The attached data for the call has been changed.

Table 71: EventAttachedDataChanged Contents

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallType	Mandatory
ConnID	Mandatory
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
ReferenceID	Optional
Server	Mandatory
ThirdPartyDN <sup>a</sup>	Optional
ThisDN	Optional
ThisDNRole	Optional
ThisTrunk	Optional
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Mandatory

a. The ThirdPartyDN attribute is used to identify who initiated a change in user data. It is mandatory if it can be specified.

## **ISCC Events**

#### **EventAnswerAccessNumber**

#### **Event Description**

T-Server has processed a previously called TGetAccessNumber() function and has returned the requested access number.

#### **Event Contents**

Table 72: EventAnswerAccessNumber Contents

Event Attribute	Туре
AccessNumber	Mandatory
ThisDN	Mandatory
ConnID	Mandatory
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory
Extensions	Optional

## **Examples**




Figure 40: EventAnswerAccessNumber when GetAccessNumber Does Not Contain AttributeLocation

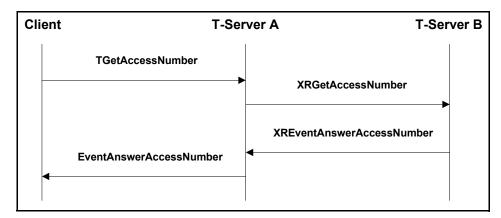


Figure 41: EventAnswerAccessNumber when TGetAccessNumber Contains AttributeLocation

**Note:** In Figure 41 T-Server A acts as an origination, and T-Server B a destination T-Server.

#### **EventRemoteConnectionSuccess**

#### **Event Description**

The call has successfully reached the remote switch.

Table 73: EventRemoteConnectionSuccess Contents

Event Attribute	Туре
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
ReferenceID	Mandatory
Server	Mandatory
ThisDN	Mandatory
time	Mandatory

#### **EventRemoteConnectionFailed**

## **Event Description**

The call failed to reach the remote switch or could not be treated as successful (for example, ISCC could not route the call to a requested destination DN).

#### **Event Contents**

Table 74: EventRemoteConnectionFailed Contents

Event Attribute	Туре
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory
ThisDN	Mandatory
Extensions	Optional

## **EventReqGetAccessNumberCanceled**

## **Event Description**

T-Server has canceled a previously called TGetAccessNumber() function before processing is complete.

#### **Event Contents**

Table 75: EventReqGetAccessNumberCanceled Contents

Event Attribute	Туре
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory
XReferenceID	Mandatory
Extensions	Optional

## **Special Events**

#### **EventACK**

#### **Event Description**

T-Server has acknowledged a request received from a client application. This event is a response to the TSendUserEvent(), TSendEvent(), TSendEventEx(), TSetInputMask(), TTransactionMonitoring(), and TPrivateSevice() functions.

**Table 76: EventACK Contents** 

Event Attribute	Туре
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
time	Mandatory

**Table 76: EventACK Contents (Continued)** 

Event Attribute	Туре
UserEvent <sup>a</sup>	Optional
Extensions	Optional
SubscriptionID	Optional <sup>b</sup>

- a. UserEvent is the identifier of the request that has caused T-Server to generate EventACK. The attribute is derived from the request.
- b. This attribute, applicable only to EventACK in response to TTransactionMonitoring(), is mandatory for the operation SubscriptionStart, but is not present for the operations SubscriptionStop and SubscriptionModify. This attribute represents a subscription identifier: the call has successfully reached the remote switch.

#### **Examples**

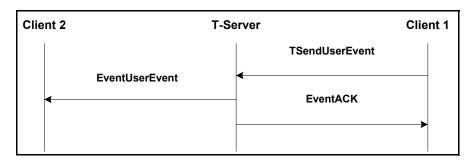


Figure 42: EventACK Feature, Example 1




Figure 43: EventACK Feature, Example 2

## **EventAgentReserved**

## **Event Description**

This event is generated as a positive response to the TReserveAgent() request, confirming that those of the parameters agent\_dn, agent\_id, and agent\_place that were present in the request have been successfully reserved. When an agent becomes reserved as the result of TReserveAgent() request, the event is sent to the application that sent the request and to all clients registered on the agent's DN.

**Table 77: EventAgentReserved Contents** 

Event Attribute	Туре
AgentID <sup>a</sup>	Optional
Event	Mandatory
Place <sup>a</sup>	Optional
Reasons	Optional
ReferenceID	Optional
Server	Mandatory
ThisDN <sup>a</sup>	Optional
Timeout <sup>b</sup>	Optional
time	Mandatory
Extensions	Optional

- a. At least one of the AgentID, Place, or ThisDN attributes must be present. The attributes are equal to the corresponding parameters of the TReserveAgent() function.
- b. The duration of the reservation is in milliseconds.

## **EventCallInfoChanged**

#### **Event Description**

The call information has been changed.

#### **Event Contents**

**Table 78: EventCallInfoChanged Contents** 

Event Attribute	Туре
ConnID	Mandatory
CustomerID	Optional
Event	Mandatory
Extensions	Optional
ReferenceID	Optional
Server	Mandatory
time	Mandatory

## **EventPrivateInfo**

## **Event Description**

This event is generated both in response to a TPrivateService() function call and when it is used to notify selected sets of clients of T-Server—specific information. This event indicates that one of two forms of data has been passed:

- Information supported only by certain T-Servers, and which is not covered by general feature requests.
- Notification about changes in T-Server behavior or device/call statuses.

This event can be distributed to the following clients:

- Those who made a request for the private service, TPrivateService().
- Those registered on the specified device, depending on the nature of the service.
- Those who would otherwise be ineligible (for security reasons) for receiving given events, and who thus require additional registration in order to be notified.

#### **Event Contents**

**Table 79: EventPrivateInfo Contents** 

Event Attribute	Туре
PrivateEvent	Mandatory
Event	Mandatory
Reasons	Optional
UserData	Optional
Extensions	Optional
ReferenceID	Optional
Server	Mandatory
ConnID	Optional
ThisDN	Optional
time	Mandatory

## **Example**




Figure 44: EventPrivateInfo Feature Example

## **EventUserEvent**

## **Event Description**

A user event from another client application has been received.

#### **Event Contents**

Table 80 contains T-Server-required attributes. Other attributes are specified by the initiator of this event.

**Table 80: EventUserEvent Contents** 

Event Attribute	Туре
CustomerID <sup>a</sup>	Optional
Event	Mandatory
Server	Mandatory
ThisDN	Mandatory
time	Mandatory
Extensions	Optional

a. See description of "CustomerID" on page 148.

## **EventPrimaryChanged**

## **Event Description**

A change in the role of one of a pair of synchronized T-Servers in hot standby mode has taken place: the T-Server's role has been changed from backup to primary.

Warning! After a client receives EventPrimaryChanged, it should resynchronize with the new primary T-Server (the one reporting this event) by calling the TQueryLocation() function and either the TQueryAddress() or TQueryCall() function.

If T-Server issues EventPrimaryChanged, and the two T-Servers have different link statuses at the time of switchover, EventLinkDisconnected or EventLinkConnected is generated as follows:

- If the former primary T-Server has its link connected, and the new one
  does not, EventLinkDisconnected is delivered just prior to
  EventPrimaryChanged.
- If the former primary T-Server has its link disconnected, and the new one has its link connected, EventLinkConnected is delivered immediately after EventPrimaryChanged.

The ordering of these messages is intended to simplify the processing logic on the client side—receiving EventPrimaryChanged when the link is disconnected may be safely ignored.

**Note:** The event generated for a primary-to-backup switchover—EventRestoreconnection, page 132—is different from EventPrimaryChanged in that it is processed internally by T-Library and is never delivered to clients.

#### **Event Contents**

**Table 81: EventPrimaryChanged Contents** 

Event Attribute	Туре
ApplicationName	Optional
time	Mandatory

#### **EventRestoreConnection**

#### **Event Description**

A synchronized connection between a pair of T-Servers in hot standby mode has been established, or the T-Server's role has been changed from primary to backup.

#### **Event Contents**

**Note:** EventRestoreConnection is processed internally by T-Library, and is not delivered to the user dispatch function. As such, it does not use the conventional event contents structure.

#### **Attributes**

ServerRole

The primary T-Server generates EventRestoreConnection, with the attribute ServerRole set to 0, when the connection to the backup T-Server has been established.

T-Server generates EventRestoreConnection and sets the attribute ServerRole to 1 to indicate that it has been changed from the primary to the backup T-Server. This value is used to

prevent a race condition in situations where two or more switchovers happen within a short interval of time. (Otherwise, T-Library relies on EventPrimaryChanged to identify the primary T-Server.)

UserData

This attribute contains the reference to the backup T-Server. T-Library uses this information to try to connect to that server.

#### **EventHardwareError**

#### **Event Description**

T-Server has detected inconsistent data or an incomplete event flow in switch messaging—for instance, a wrong checksum or missing attributes.

#### **Event Contents**

Table 82: EventHardwareError Contents

Event Attribute	Туре
CustomerID	Optional
ThisDN	Optional
ConnID	Optional
PreviousConnID	Optional
ErrorCode	Optional
Event	Mandatory
Server	Mandatory
time	Mandatory
Extensions	Optional

## **EventResourceAllocated (Obsolete—No Longer Supported)**

## **Event Description**

The switch has registered the CTI link to receive events about the specified telephony object.

## **EventResourceFreed (Obsolete—No Longer Supported)**

### **Event Description**

The switch has canceled registration of the CTI link, so that it no longer can receive events about the specified telephony object.

## **Negative-Response Events**

#### **EventError**

#### **Event Description**

The requested function cannot be performed. The reasons are specified by the values of the ErrorCode and ErrorMessage parameters.

**Table 83: EventError Contents** 

Event Attribute	Туре
ConnID	Optional
CustomerID	Optional
ErrorCode	Mandatory <sup>a</sup>
ErrorMessage	Optional
Event	Mandatory
ReferenceID	Mandatory
Server	Mandatory
ThisDN	Optional
time	Mandatory
Extensions	Optional <sup>b</sup>

a. ErrorCode, when received as a negative response to TTransactionMonitoring(), may include the following reasons:

TERR\_UNSUP\_OPER (unsupported operation), the Transaction Monitoring Feature is not supported by this T-Server.

- TERR\_INVALID\_ATTR (invalid attribute value), the transaction monitoring request contains an invalid attribute.
- b. Contains additional information on a failure.

**Note:** The Reasons attribute was formerly included in this event. It is now obsolete. (It is omitted from the EventError message since, presumably, the requestor is aware of the reason for the request.)

## **Agent States and Work Modes**

Agent states specify what state an agent is in. For example, an agent in Ready state is available to handle calls from an ACD queue. An agent can have several states with respect to different ACD devices, or he can use a single state to describe his relationship to all ACD devices. Agent states are reported in agent-state events.

Figure 45 on page 137 shows the agent states. Transitions between states, represented by arrows, show subsequent states that may be entered from a given state. The agent-state change occurs after T-Server generates a proper event.

## **Agent Null**

The state where an agent is not logged in to an ACD group. Logging on and logging off cause the transition to and from this state.

## **Agent Not Ready**

The state where an agent is logged in to an ACD group, but is not prepared to handle calls that the ACD distributes. While in this state, an agent can receive calls that are not handled by the ACD.

## **Agent Ready**

The state where an agent is logged in to an ACD group and is prepared to handle calls that the ACD distributes.

#### **Agent Busy Ready**

The state where a device, on behalf of an agent, is involved with an existing ACD call even if that call is on hold at this device. After the call has been completed, the device is placed in the Agent Ready state (that is, it can pick up a new call). Direct calls between agents, calls between supervisors and agents, and private calls do not cause this transition.

#### **Agent Busy NotReady**

The state where a device, on behalf of an agent, is involved with an existing ACD call even if that call is on hold at this device. After the call has been completed, the device is placed in the Agent Not Ready state (that is, it cannot receive further calls from the ACD). Direct calls between agents, calls between supervisors and agents, and private calls do not cause this transition.

#### **Agent Busy AfterCallWork**

The state where a device, on behalf of an agent, is involved with an existing ACD call even if that call is on hold at this device. After the call has been completed, the device is placed in the Agent After Call Work state (that is, it is not able to receive further calls). Direct calls between agents, calls between supervisors and agents, and private calls do not cause this transition.

#### **Agent After Call Work**

The state where a device, on behalf of an agent, is no longer involved with an ACD call. While in this state, the agent is performing administrative duties for a previous call and cannot receive further calls from the ACD.

## **Agent Return Back**

The state where an agent is logged in to an ACD group upon having returned from the WalkAway state. The agent may or may not be ready to receive calls.

#### **Agent Walk Away**

The state where an agent is logged in to an ACD group, but is understood not to be at his station, and thus not prepared to handle calls that the ACD distributes.

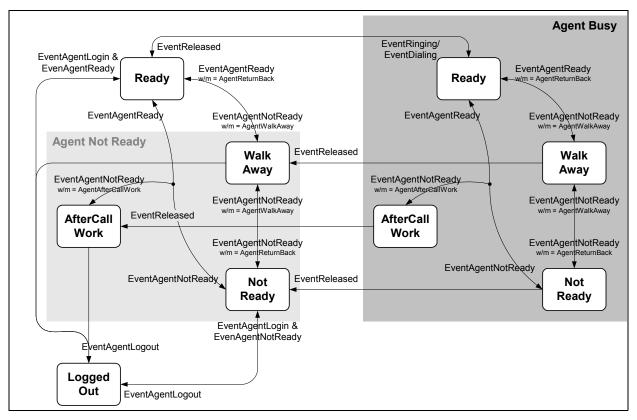


Figure 45: Agent-State Diagram

#### **Agent-State Diagram Comments**

In certain cases, even though the agent state remains the same, T-Server might generate distinct events to represent internal state transitions or data changes within this state. This can take place if T-Server is required to support switch-specific substates or if it must distribute additional resources or extensions. The following rules apply to these existing-state transitions:

- T-Server filters out unsolicited CTI messages that do not provide new information from the last EventReady/NotReady. For instance, if the switch re-sends the exact same event every time an ACD call is released on an agent's DN, T-Server does not continue to pass on these events to its clients. On the other hand, if switch-specific sub-states, as reported in AttributeWorkMode, or if the ReasonCode attribute is changed, then T-Server distributes EventReady/NotReady.
- T-Server distributes a corresponding EventReady/NotReady when clients initiate a same-state transition, provided T-Server can confirm the state with the switch, or T-Server has enough confidence that the internally kept state is correct. In the process of confirming the state with the switch, if T-Server receives an error message that suggests "in the same state," it translates this into a positive response. If these CTI messages do not

provide adequate information regarding the problem with the request, based on internal data, T-Server may generate a response to the client on its own.

Note: Beginning with the 7.1 release of T-Server, the function TAgentSetIdleReason(), and its corresponding event, is no longer supported. Instead, use the generic Request/EventAgentReady/NotReady with a new value for ReasonCode in the Extensions attribute and/or in the attribute Reason.

- The following transitions are available as of the 7.1 release of T-Library:
  - T-Server responds with EventAgentLogin (distributed to all registered clients) in response to the AgentLogin() function, as long as the credentials (AgentID and ThisQueue) used by the already-logged-in agent are the same for this DN (and provided T-Server is able to verify this information on the switch). In the case of credentials that differ:
    - Since the Genesys model supports only one agent with distinct AgentID logged in on a given device, depending on the switch, T-Server either rejects a request with a distinct AgentID or forces a logout of the old AgentID.
    - Requests that have different ThisQueue values are processed according to whether multiple logins are allowed by the CTI protocol.
- EventAgentLogout in connection with a Logged Out state is allowed in response to a client's request, but is not required. Genesys recommends that you direct the request to the switch and translate any positive acknowledgement (one indicating a previous agent state desynchronization) into EventAgentLogout.

#### **Agent-State Diagram Limitations**

- Not all agent states are available on all switching platforms. Furthermore, some platforms may have additional substates. Please refer to the switch's documentation for more information.
- Depending on switch capabilities, not all transitions are available on all platforms. Please refer to the switch's documentation for more information.
- In some cases, when T-Server does not have sufficient information from the CTI link, it may use the Logged In state (not shown in the diagram) to indicate that an agent is logged in, but that his status is not known. In order to report the transition from the Logged Out to the Logged In state, T-Server sends a single EventAgentLogin, without also sending an EventReady or EventNotReady.

## **Unified Call-Party States**

A *call-party* is the relationship between a call and a given telephony device. Call-Party is often referred to as party. For the purposes of this chapter, the two terms are interchangeable.

A *call* is typically an interaction between two or more telephony objects (or between a telephony object and a network entity) that is established by the use of telephony network capabilities. However, in fact, Genesys assumes this association may have zero to many parties. In the context of the Genesys model, a call is a stateless object, and it always has a unique connection ID.

A *party* (call-party) represents the call's relationship to a given telephony device—either an internal DN or an external (out-of-PBX) call participant. Each call-party has state (and a number of other attributes).

A *call-party state* is a packaging of the fuller expression of a party's status (which may be multifaceted)—a compound state made up of the following groups:

- Generic Telephony State (GTS);
- Supplementary Telephony State (STS);
- Routing/Treatment State (RTS).
- State modifiers

Each of these groups has parts that are referred to as elementary states, or properties (the basic attribute of a call-party). Typically, a call-party state consists of just one of these groups. However, there are certain cases where a coexistence of multiple groups in one call-party state is the norm. These, for instance, should be familiar:

- Routing with Queueing involves GTS and RTS.
- Service Observing involves both GTS and STS.

**Note:** Although not all combinations of elementary states make sense, there is no restriction on them.

A state is packed into one integer according to the structure found in Figure 46.

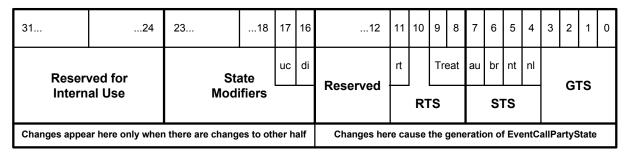


Figure 46: Call-Party Structure

## **Availability of State Information**

The Genesys Framework assumes a particular call-party state for each call-party in the enterprise and supports the generic party-state set common to those T-Servers that support it. Not all party states or party-state transitions are mandatory for each T-Server. A given vendor-specific CTI may not provide a specific call-party state. Or, if a given state is available with the CTI, it may lack some relevant information required for T-Server to represent that particular state on the Genesys side of the software, or permit Genesys to perform a party-state transition. Thus the implementation of call-party states in T-Server is only complete to the extent that information is available from the switch. See PartyState in your API reference for details and state numeric values.

## **Generic Telephony State**

The *Generic Telephony State* part of a call-party state comprises the most important of the sub-party states.

Previously, the Genesys model did not include the states Initiated and Failed as marking participation in a call. As a result, there were no special events in DN-based event reporting to indicate a transition between those states and NULL. Some T-Servers used device-related EventOffHook/OnHook with attribute ConnID to indicate a party had been added or deleted, but this event is optional and cannot be used when there is another active call on the same device (otherwise the status of the device is reported incorrectly). It is not possible to reconstruct the Initiated and Failed states from DN-based reporting. Furthermore, for compatibility reasons, parties in these states are not included in the EventPartyInfo list, and related calls are not included in EventRegistered and EventAddressInfo.

The Generic Telephony State has the following possible properties:

#### Null and Null<sup>2</sup>

Represent intermediate states when party information exists in T-Server memory, but when there is no logical relation between a call and device.

#### Initiated

Indicates that a call has been initiated by a device. Any telephony device that is initiating a new call enters the Initiated state while it awaits the availability of switch resources or user input. That is, the device remains in the Initiated state from the moment it goes off-hook until EventDialing is sent.

#### Queued

Identifies that a call is queued or parked on a given device, and that it awaits the availability of some service (for example, ACD queue distribution) or of some device (for example, a phone line).

#### Alerting

Means that a call is alerting on a device, indicating an incoming call (for example, the phone is ringing), or that a call is in the process of being distributed to a destination (for example, is being processed by the telephony network).

#### Connected

Indicates that a given device has a voice connection with other participants.

**Note:** The Dialing state (which is implicitly used in the DN call model) does not exist in the unified party-state model. Dialing was an attempt to report the state of the other party on the call. Such other parties cease to be clear in complex scenarios where transfers and conferences confuse matters. However, Dialing, as a state modifier, is available for compatibility with traditional reporting.

#### Call Progress (CP) Detection

The originating device (either a queue or a route point) for predictive dialing is put in this state from the time a call is made (and EventDialing is sent) to the moment the call is classified, at which time it is either moved to the Queued state, or is released.

#### Held

A device has temporarily suspended its connection to other call participants.

#### **Busy**

A call cannot reach the intended device, which is busy.

#### **Failed**

Indicates that a call originating on a given device has not succeeded (either the dialed number is wrong, or the switch was not able to allocate the trunk). This state is used instead of Busy when a destination party was never created for the call.

Failed also applies to a party whose call has been disconnected, but who remains off hook.

#### **Generic Telephony State Diagram for Regular DNs**

Figure 47, indicates the event flow that leads to the various sub states that comprise the Generic Telephony State. This diagram applies to all regular DNs. That is, all types except ACD queues and route points.

**Note:** Although they appear in Figure 47, events Alerting, Initiated, Failed, and Cleared do not currently exist. These names are reserved for future use.

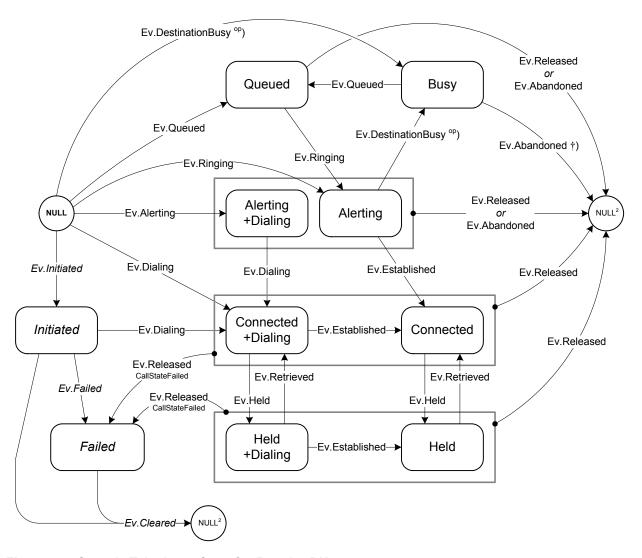


Figure 47: Generic Telephony State for Regular DNs

- <sup>op</sup> Note that in this case, with a DN-based call model, EventDestinationBusy is reported for the opposite party.
- † EventAbandoned is only sent if there is an EventRinging for that party. This occurs only with external parties.

# Generic Telephony State Diagram for ACD Queues and Route Points

Figure 48, indicates the event flow that leads to the various sub states that comprise the Generic Telephony State. This diagram applies to ACD queues and route points.

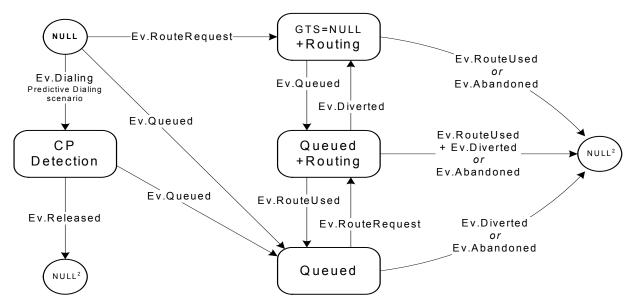


Figure 48: Generic Telephony State for ACD Queues and Route Points

## **Supplementary State**

The *Supplementary State* refers to combinations of the following party properties. Not all combinations of these properties make logical sense, but the general model does not put any restrictions on them. Furthermore, there is no transitional model for these properties (any state can change to any other).

#### **NoListen**

A party cannot hear other participants on the call.

#### **NoTalk**

A party is muted, and other participants on the call do not hear that party.

#### Audit

A party is attached to a call as Service Observer or Service Assistant.

#### Bridged

A party is attached to the call with the Bridged Call Appearance feature.

#### **State Modifiers**

*State Modifiers* further nuance the relationships between events and call states by allowing for intermediate sub states. These sub states provide additional information to the system, but may otherwise be unnecessary in the unified call-party state model.

#### **Dialing Modifier**

The unified call-party state model uses Dialing, although not actually a party state, as a state modifier. This allows the system to handle the following scenarios, also illustrated in Figure 49:

- Reporting applications may need to measure dialing time, which is defined as the interval between the moment a party is connected to a call and the moment when the voice connection with the other participant is established for the first time. It is possible to reconstruct the time spent in a dialing state without this modifier, but, since T-Server does not provide historical data, this calculation needs to be done when the full history of the call is available (by factoring in the states of other parties). The Dialing modifier provides clients access to this information during the call.
- T-Server needs an indication of whether EventEstablished has been distributed for a given party. In a DN-based call model this event is sent only when a connection is first established. (See Figure 49 for an instance of why a subsequent EventEstablished would be useful.) While it is possible to have this indication stored in device-specific states, the Dialing modifier allows for common functionality across media devices.

#### **Uncertain Modifier**

This modifier is set when the party information is not reliable. See Reliability in your API reference for details.

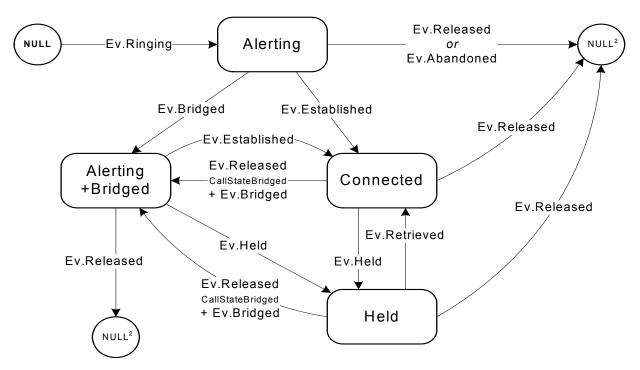


Figure 49: Modifier Dialing

# **Routing / Treatment State**

The *Routing / Treatment State* consists of the following properties:

#### **TreatmentReq**

The switch is waiting for a treatment to be applied to the call.

#### **Treatment**

A treatment has been applied while the call is located on a given device.

#### Routing

The switch is waiting for routing instructions.

# **Routing / Treatment State Diagram**

Figure 50 indicates the event flows that lead to the various states comprising the Routing (left portion of the diagram) and Treatment (right portion of the diagram) states. The Routing portion pertains to route points; the Treatment portion pertains directly to monitored IVR ports.

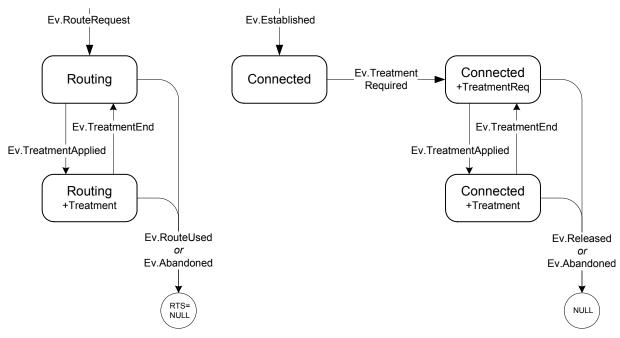


Figure 50: Routing (left portion) and Treatment States (right portion)

# **Event Attributes**

This section describes the attributes that make up each event.

#### **AccessNumber**

A pointer to a number by dialing which a client application from the specified switch can reach a specific external routing point (This DN).

# **AgentID**

This parameter uniquely identifies the ACD agent. For more information, refer to the type Agent ID in your API reference.

#### **ANI**

Automatic Number Identification. Indicates the telephony-company charge number.

# **CallHistory**

Information about transferring/routing of the call through a multi-site contact center network. For more information, refer to the type CallHistoryInfo in

your API reference. Typically used to keep track of a call in multi-site contact centers.

#### **CallID**

This attribute contains the call identification provided by the switch, which uniquely identifies a call. As opposed to ConnID assigned by T-Server, CallID is created by the switch when the incoming call arrives, or when agent/system out-dial calls are created. The attribute must be present if the switch generates and distributes the corresponding parameter to T-Server. (CallID is zero as long as the switch does not provide that information to T-Server.) For more information, refer to the type CallID in your API reference.

# CallingLineName (Obsolete)

A pointer to the name of the person associated with the directory number from where the inbound call in question has been made. It can be distributed by an originating switch through an ISDN trunk only.

#### **CallState**

The current status of the call the event relates to. For more information, refer to the type CallState in your API reference.

# **CallType**

The type of the call in question. For more information, refer to the type CallType in your API reference.

# Capabilities

Switch-specific mask specifying the set of requests and events that this T-Server can handle.

#### Cause

For network calls, the reason for transitions to certain states—Routing and NoParty. (This helps clarify delivery failure, such as Busy or NoAnswer.)

# **CLID** (Obsolete)

Calling Line Identifier. The directory number from where the inbound call was made.

# **CollectedDigits**

A pointer to the digits that have been collected from the calling party.

#### ConnID

A current connection identifier of the call to which this event relates.

**Table 84: Connection ID Structure** 

Byte	Bits								
	0	1	2	2 3 4 5 6 7					
0	Reserved Global Server Identifier								
1		Global Server Identifier							
2	Local Connection Identifier								
3	Local Connection Identifier								
4	Local Connection Identifier								
5	Local Connection Identifier								
6	Local Connection Identifier								
7	Local Connection Identifier								

#### **ConnID Parameters**

Reserved (bits 0 & 1)

Bits reserved for future usage.

Global Server Identifier (bits 2-15)

Unique identifier for this T-Server specified by the server-id option. If server-id is not specified, the ConnID may not be unique within a multi-site contact center.

Local Connection Identifier (bits 16-63)

Local identifier of the call this event relates to.

For more information, refer to the type ConnectionID in your API reference.

#### **CustomerID**

A pointer to the string containing the assigned Customer (Tenant) identifier through which the processing of the call was initiated. The attribute must be present in every event for a multi-tenant contact center.

#### **DNIS**

Directory Number Information Service. The directory number to where the inbound call has been made.

#### **ErrorCode**

This attribute contains a value that indicates why a client request failed.

# **ErrorMessage**

A pointer to the character string containing additional information about an error.

#### **Event**

The event identifier. For more information, refer to the type MessageType in your API reference.

#### **Extensions**

A pointer to an additional data structure that takes into account switch-specific features that cannot be described by the other parameters in an event or a request. Extensions that are specific to particular events are noted with their event information in this chapter. Some extensions for requests, however, are applicable to all T-Servers, and permit tuning of T-Server operations.

#### **FileHandle**

The handle of the voice file in question. For more information, refer to the type File in your API reference.

#### **HomeLocation**

A pointer to the name of the host where T-Server is running.

#### **InfoStatus**

The InfoType information about the telephony object specified by ThisDN and/or ThisQueue.

# InfoType

The type of information about the telephony object in question.

# LastCollectedDigit

The last digit collected from the calling party.

#### Location

The remote location's name, in the form of

⟨Switch Name⟩

or

⟨T-Server Application Name⟩@⟨Switch Name⟩.

(Switch Name and T-Server Application Name are as defined in the Configuration Layer.)

# LocationInfoType

A type of information requested by a client in the TQueryLocation() request. For more information, refer to the type LocationInfoType in your API reference.

#### **NetworkCallID**

In case of network routing, the call identifier assigned by the switch where the call initially arrived.

#### **NetworkCallState**

The current status of the network call the event relates to. For more information, refer to the type NetworkCallState in your API reference.

#### **NetworkDestDN**

The intended destination of the network operation. This may be in the form: location::DN.

#### **NetworkDestState**

The state of the destination party for a network call.

#### **NetworkNodeID**

In case of network routing, the identifier of the switch where the call initially arrived.

# **NetworkOrigDN**

DN of the internal origination party in the form location::DN. This attribute is only available for first-party operations, those made on behalf of Agent 1, requested through a premise T-Server.

## NetworkPartyRole

The role of a call participant with respect to an in-progress network-transfer request. For the agent who originated the last network-transfer request, the value is RoleNtwkOrigParty. For the new destination, the value is RoleNtwkDestParty. (Network T-Servers do not send this attribute.)

#### **NodeID**

Uniquely identifies a switch within a network.

#### **OtherDN**

The directory number of the second most significant telephony object (except an ACD group or trunk group) with respect to the event in question. The application does not have to be registered to this directory number to receive the event in question.

#### **OtherDNRole**

The role of the telephony object specified by OtherDN in the event in question. For more information, refer to the type DNRole in your API reference.

#### **OtherQueue**

The directory number of the second most significant ACD group with respect to the event in question.

#### **OtherTrunk**

The identifier of the second most significant trunk group with respect to the event in question.

#### **Place**

The identifier of the place requested for reservation.

#### **PreviousConnID**

This attribute links two associated calls. For example, events related to an original call include the connection ID of a consultation call; events related to a consultation call include the connection ID of the original call. See "ConnID" on page 148.

**Warning!** When EventPartyChanged is generated for the party that is still only involved in an original call (that is, ConnID has not been changed during a two-step operation), the PreviousConnID attribute is equal to ConnID of the original call.

#### **PrivateEvent**

The private event identifier. For more information, refer to the type PrivateMsgType in your API reference.

#### Reasons

A pointer to an additional data structure that provides reasons for and results of actions taken by the user of ThisDN. Any Reasons attribute that appears in TEvent is taken directly from the corresponding request. (See Table 85.) There is no other source for the information found in the content of the Reasons attribute. That is, no Reasons attribute should be expected for an event that is unsolicited. An event with no reference ID has no identifiable request that prompted it. See "Persistent Reasons" on page 207 for more information. (Switch information of a similar nature to this Genesys Reasons attribute is sometimes available, but those switch reasons are passed in the Extensions attribute.)

#### RefConnID

This attribute identifies the connection ID that results from the merging of two calls.

#### ReferenceID

ReferenceID is the identifier generated by T-Library or a TSetReferenceID() function call and attached to the request a client sends to T-Server. Every time a client sends a request to T-Server, it uses the current Reference ID (increasing it by one each time). In response, T-Server generates an event. Only in the response to the client who initiated the request, as acknowledgment that the request has been fulfilled, the resulting event includes the same Reference ID that was attached to the request. If the request fails, EventError will be sent only to the requestor. Table 85 lists the event in which you will find the

ReferenceID corresponding to that found with the request that prompted its assignment initially.

**Note:** For a limited number of specific requests, as noted in Table 85, T-Server may send more than one event with the same ReferenceID.

Table 85: ReferenceID in Events That Correspond to Requests

Request	Event				
General Requests					
TOpenServer Not Applicable					
TOpenServerEx	Not Applicable				
TDispatch	Not Applicable				
TCloseServer	Not Applicable				
TScanServer	Not Applicable				
TScanServerEx	Not Applicable				
TSetInputMask	EventACK				
Regi	stration Requests				
TRegisterAddress <sup>a</sup> EventRegistered					
TUnregisterAddress <sup>a</sup>	EventUnregistered				
Call-l	landling Requests				
TAnswerCall	EventEstablished				
TClearCall	EventReleased				
THoldCall	EventHeld				
TMakeCall <sup>b</sup>	EventDialing				
TMakePredictiveCall	EventDialing				
TReleaseCall	EventReleased				
TRetrieveCall	EventRetrieved				
TRedirectCall	EventReleased				

Table 85: ReferenceID in Events
That Correspond to Requests (Continued)

Request	Event			
Transfer/Conference Requests				
TInitiateConference <sup>b</sup>	EventDialing			
TInitiateTransfer <sup>b</sup>	EventDialing			
TCompleteConference	EventReleased			
TCompleteTransfer	First arriving EventReleased			
TDeleteFromConference	EventPartyDeleted or EventReleased			
TReconnectCall	EventRetrieved			
TMergeCalls	EventReleased			
TMuteTransfer <sup>b</sup>	EventDialing			
TAlternateCall	EventHeld			
TSingleStepConference	EventPartyAdded or EventRinging			
TSingleStepTransfer <sup>b</sup>	EventReleased			
Network Transfer/Conference Requests				
TNetworkConsult	EventNetworkCallStatus			
TNetworkAlternate	EventNetworkCallStatus			
TNetworkTransfer	EventNetworkCallStatus			
TNetworkMerge	EventNetworkCallStatus			
TNetworkReconnect	EventNetworkCallStatus			
TNetworkSingleStepTransfer	EventNetworkCallStatus			
TNetworkPrivateService	EventNetworkPrivateInfo			
Call-Routing Requests				
TRouteCall <sup>b</sup>	EventRouteUsed			
Call-Treatment Requests				
TApplyTreatment	EventTreatmentApplied+ EventTreatmentEnd or EventTreatmentNotApplied			

Genesys 🥃

Table 85: ReferenceID in Events That Correspond to Requests (Continued)

Request	Event			
TGiveMusicTreatment	EventTreatmentApplied			
TGiveRingBackTreatment	EventTreatmentApplied			
TGiveSilenceTreatment	EventTreatmentApplied			
D	TMF Requests			
TCollectDigits	EventDigitsCollected			
TSendDTMF	EventDTMFSent			
Void	ce-Mail Requests			
TOpenVoiceFile	EventVoiceFileOpened			
TCloseVoiceFile	EventVoiceFileClosed			
TLoginMailBox	EventMailBoxLogin			
TLogoutMailBox	EventMailBoxLogout			
TPlayVoice	EventVoiceFileEndPlay			
Agent & DN Feature Requests				
TAgentLogin	EventAgentLogin			
TAgentLogout	EventAgentLogout or EventQueueLogout			
TAgentSetReady	EventAgentReady			
TAgentSetNotReady	EventAgentNotReady			
TCallSetForward	EventForwardSet			
TCallCancelForward	EventForwardCancel			
TMonitorNextCall	EventMonitoringNextCall			
TCancelMonitoring	EventMonitoringCancelled			
TSetMuteOff	EventMuteOff			
TSetMuteOn	EventMuteOn			
TListenDisconnect	EventListenDisconnected			
TListenReconnect	EventListenReconnected			

Table 85: ReferenceID in Events That Correspond to Requests (Continued)

Request	Event
TSetDNDOn	EventDNDOn
TSetDNDOff	EventDNDOff
TSetMessageWaitingOn	EventMessageWaitingOn
TSetMessageWaitingOff	EventMessageWaitingOff
Q	uery Requests
TQueryAddress <sup>a</sup>	EventAddressInfo
TQueryCall <sup>a</sup>	EventPartyInfo
TQueryLocation <sup>a</sup>	EventLocationInfo
TQueryServer <sup>a</sup>	EventServerInfo
TQuerySwitch <sup>a</sup>	EventSwitchInfo
Use	er-Data Requests
TAttachUserData	EventAttachedDataChanged
TUpdateUserData	EventAttachedDataChanged
TDeleteUserData	EventAttachedDataChanged
TDeleteAllUserData	EventAttachedDataChanged
IS	SCC Requests
TGetAccessNumber <sup>b</sup>	EventAnswerAccessNumber
TCancelReqGetAccessNumber	EventReqAccessNumberCanceled
Sp	pecial Requests
TReserveAgent	EventAgentReserved
TSendUserEvent	EventACK
TSendEvent	EventACK
TSendEventEx	EventACK
TSetCallAttributes	EventCallInfoChanged
TPrivateService	EventPrivateInfo or EventAck

Genesys 🥃

- a. Only the requestor will receive a notification of the event associated with this request.
- b. Since this feature request may be made across locations in a multi-site environment, if the location attribute of the request contains a value relating to any location other than the local site, except when the response to this request is EventError, there will be a second event response that contains the same reference ID as the first event. This second event will be either EventRemoteConnectionSuccess or EventRemoteConnectionFailed. See page 149 for more information on data passed in multi-site environments.

# Reliability

Indicates uncertainty with respect to the *reliability* of an event. For more information, see Reliability in your API reference.

## RouteType

The type of routing to be applied to the telephony object in question. For more information, refer to the type RouteType in your API reference.

# **XRouteType**

The type of routing between T-Servers to be applied to the telephony object in question. For more information, refer to the type XRouteType in your API reference.

#### Server

A local server handle to the T-Server in question. In other words, a unique identifier assigned by T-Library to the connection between a client and T-Server. For more information, refer to the type TServer in your API reference

#### ServerRole

Specifies the Role of T-Server. For more information, refer to the type ServerRole in your API reference.

#### ServerVersion

The version (release) number of the running T-Server, for example, 7.2.000.02.

#### SessionID

A unique session identifier generated by T-Server.

### **SubscriptionID**

A unique subscription identifier generated by T-Server on the creation of a new transaction monitoring subscription.

# **ThirdPartyDN**

The directory number of the third most significant telephony object (except an ACD group or trunk group) with respect to the event in question. The application does not have to be registered to this directory number to receive the event in question.

# **ThirdPartyDNRole**

The role of the telephony object specified by ThirdPartyDN in the event in question. For more information, refer to the type DNRole in your API reference.

# **ThirdPartyQueue**

The directory number of the third most significant ACD group with respect to the event in question.

# **ThirdPartyTrunk**

The identifier of the third most significant trunk group with respect to the event in question.

#### **ThisDN**

The directory number of the most significant telephony object (except an ACD group or trunk group) with respect to the event in question. The application must be registered to this directory number to receive the event in question.

#### **ThisDNRole**

The role of the telephony object specified by ThisDN in the event in question. For more information, refer to the type DNRole in your API reference.

#### **ThisQueue**

The directory number of the most significant ACD group with respect to the event in question.

#### **ThisTrunk**

The identifier of the most significant trunk with respect to the event in question.

#### time

The structure specifies event generation time that is expressed in elapsed seconds and microseconds since 00:00 GMT, January 1, 1970 (zero hour). For more information, refer to the type Time in your API reference.

# **TreatmentType**

The type of treatment to be applied to the telephony object in question. For more information, refer to the type TreatmentType in your API reference.

#### **UserData**

Specifies the pointer to the call-related user data. For more information about user data, refer to the KVList section of your API reference.

#### WorkMode

This attribute indicates the agent/supervisor-related current work mode. For more information, refer to the type AgentWorkMode in your API reference.

#### **XReferenceID**

The reference number of a TGetAccessNumber() function that is called by an application.

# **TEvent Structure**

This section describes the syntax of the TEvent structure. For information on types of attributes and possible values, see a full description of this structure in your API reference.

**Note:** Although listed here, certain components of the TEvent structure are reserved for internal use only.

```
typedef struct TEvent_tag {
  enum TMessageType
                               Event;
  TServer
                               Server;
  int
                               ReferenceID;
  char
                               *HomeLocation;
  char
                               *CustomerID;
  TConnectionID
                               ConnID;
  TConnectionID
                               PreviousConnID;
  TCallID
                               CallID;
                               NodeID;
  int
  TCallID
                               NetworkCallID;
                               NetworkNodeID;
  int
  TCallHistoryInfo
                               CallHistory;
  TCallType
                               CallType;
  TCallState
                               CallState;
  TAgentID
                               AgentID;
  TAgentWorkMode
                               WorkMode;
                               ErrorCode;
  Long
  char
                               *ErrorMessage;
  TFile
                               FileHandle;
  char
                               *CollectedDigits;
  char
                               LastCollectedDigit;
  TDirectoryNumber
                               ThisDN;
  TDirectoryNumber
                               ThisQueue;
  unsigned Long
                               ThisTrunk;
  TDNRole
                               ThisDNRole;
  TDirectoryNumber
                               OtherDN;
  TDirectoryNumber
                               OtherQueue;
  unsigned Long
                               OtherTrunk;
  TDNRoLe
                               OtherDNRole:
  TDirectoryNumber
                               ThirdPartyDN;
  TDirectoryNumber
                               ThirdPartyQueue;
  unsigned long
                               ThirdPartyTrunk;
  TDNRole
                               ThirdPartyDNRole;
  TDirectoryNumber
                               DNIS;
  TDirectoryNumber
                               ANI;
  TAddressInfoType
                               InfoType;
  TAddressInfoStatus
                               InfoStatus;
  TTreatmentType
                               TreatmentType;
  TRouteType
                               RouteType;
  char
                               *ServerVersion;
  TServerRole
                               ServerRole;
                               Capabilities;
  TMask
  TKVList
                               *UserData;
  TKVList
                               *Reasons;
  TKVList
                               *Extensions;
  TTimeStamp
                               Time;
```

```
void
                              *RawData;
  TDirectoryNumber
                              AccessNumber;
  TXRouteType
                              XRouteType;
  TReferenceID
                              XReferenceID;
  TKVList
                              *TreatmentParameters;
  char
                              *Place;
  int
                              Timeout;
  TMediaType
                              MediaType;
  TLocationInfoType
                              LocationInfo;
  TMonitorNextCallType
                              MonitorNextCallType;
  TPrivateMsgType
                              PrivateEvent;
  /* Application data (set by TSetApplicationData) */
  void *ApplicationData;
} TEvent;
```



#### Chapter

# 2

# T-Library Call-Based Notifications

This chapter describes the events generated when T-Server notifies a client of call-based activity. Each event listed here is identified with a description, the contents of the event (presented in table format as a list of the attributes associated with it), and an example of where the event is likely to be encountered during a call flow. (The format of this part of the chapter is the same as the general-events chapter, "T-Library Events" on page 23.)

This chapter has the following section:

- Call Definition, page 163
- T-Library Call-Based Events, page 164
- Multi-Site Call Scenarios, page 171

Note: The information in this chapter replaces a now deprecated solution that used existing DN-based functions to obtain call-based notifications. That former solution required that T-Server clients register for abstract DNs in a Genesys implementation. In order to indicate that an abstract DN was notifying or was being referred to by a parameter of a function, a double colon was used after certain event attributes or parameters, namely dn and location, as in AttributeThisDN=<location>::.

# **Call Definition**

A call is a temporary association among several telephony objects (or between a telephony object and a network entity) that is established by the use of telephony network capabilities. This association may have from zero to many parties. A call is a stateless object that has a Universally Unique ID (UUID) attribute, a Connection ID (comparable to the DN-based attribute of the same

name used in event reporting), a type, a number of optional attributes, and a list of parties.

**Note:** Consultation calls not only have references to the active call, but also to the main (original) call. In multi-site environments, related calls are linked to each other my means of Inter-Site Links (IS-Links). (See "Multi-Site Call Scenarios" on page 171 for details.) Except for these two cases of additional references, all calls are processed and reported on independently of one another.

#### **Call Attributes**

Calluuid (string)

UUID of the call.

ISLinkList

List of links to call instances distributed across remote sites.

ConnID (conn-id)

Connection ID of the call.

CallType (int)

Call type (Internal/Inbound/Outbound/Consult).

OrigCalluuid

UUID of the main call (for consult calls only)

**Note:** The following additional attributes for calls have the same definitions as their DN-based analogs. See individual listings under "Event Attributes," beginning on page 146.

CallID
NodeID (int)
NetworkCallID (ulong64)
NetworkNodeID (int)
ANI (string)
DNIS (string)
UserData (kv-list)

# **T-Library Call-Based Events**

This section describes the call-based events and how they differ from their DN-based counterparts.

Event contents are presented as the collection of attributes associated with each event, as well as an indication of that attribute's type. For the purposes of this chapter, type has one of two values: Mandatory or Optional. Here type refers to

the presence of the attribute at the time of the generation of its event, and not to a characteristic of the attribute itself.

#### **Attribute Type:**

- Mandatory—Indicates that this attribute is always present when its associated event occurs.
- Optional—Indicates that this attribute may or may not be present when the associated event occurs.

# **List of T-Library Call-Based Events**

There are only three notifications available for calls: CallCreated, CallDataChanged, and CallDeleted. Each call-based event may have a number of attributes, and, except for a call's CallUUID, all call attributes (including ConnID and ISLinkList) may have values that change. For Hot Standby redundant environments, CallUUID is replicated from the primary to the backup T-Server.

**Note:** T-Server may report several changes to a call in one event, even if the changes are caused by different CTI messages.

Table 86: List of T-Library Call-Based Events

Events	Page #
General Events	
EventCallCreated	page 165
EventCallDataChanged	page 166
EventCallDeleted	page 167
EventReleased—DEPRECATED	page 168

# **EventCallCreated**

# **Event Description**

Indicates that a call has been created in T-Server.

**Table 87: EventCallCreated Contents** 

Event Attribute	Туре	
CallUUID	Mandatory	
ISLinkList <sup>a</sup>	Optional	
ConnID	Mandatory	
CallType	Optional	
OrigCallUUID	Optional	
CallID	Optional	
NodeID	Optional	
NetworkCallID	Optional	
NetworkNodeID	Optional	
ANI	Optional	
DNIS	Optional	
UserData	Optional	
CustomerID	Optional	
DialedNumber <sup>b</sup>	Optional	

- a. Applies to resynchronization cases only (T-Server with clients upon initial connect or reconnect at HA switchover). Otherwise, this value is typically unknown at call creation.
- b. Applies to outgoing calls only. This optional attribute (string) contains the number dialed, if known when the call is created (which would be possible only if it had been created at a client's request).

# **EventCallDataChanged**

# **Event Description**

Indicates that some of a given call's properties have changed.

Genesys S

Note: Unlike DN-based notifications, EventCallDataChanged includes as attributes only those call attributes that have changed. (Except for CallUUID and ConnID, unchanged attributes are not present in the event, including ISLinkList; in the event that user data is deleted from the call, the UserData attribute contains an empty TKVList.)

Table 88: EventCallDataChanged Contents

Event Attribute	Туре	
CallUUID	Mandatory	
ISLinkList	Optional	
ConnID	Mandatory	
CallType	Optional	
OrigCallUUID	Optional	
CallID	Optional	
NodeID	Optional	
NetworkCallID	Optional	
NetworkNodeID	Optional	
ANI	Optional	
DNIS	Optional	
UserData	Optional	
CustomerID	Optional	
CtrlParty <sup>a</sup>	Optional	

a. A reference to the party that caused the change.

# **EventCallDeleted**

# **Event Description**

Indicates that the call has been deleted.

**Table 89: EventCallDeleted Contents** 

Event Attribute	Туре
CallUUID	Mandatory
ConnID	Mandatory
Cause <sup>a</sup>	Optional
RefCallUUID <sup>b</sup>	Optional
RefConnID <sup>c</sup>	Optional
CtrlParty <sup>d</sup>	Optional

- a. An integer indicating the cause of the deletion, for instance, a transfer or conference.
- b. CalluuID for the call to which this one was merged, as in the case of a transfer, conference, or merge.
- c. The RefConnID attribute can only be present if the cause of the call deletion is a transfer, conference, or merge.
- d. A reference to the party that initiated the disconnection of the call.

# **EventReleased—DEPRECATED**

# **Event Description**

The telephony object specified by ConnID has been deleted from T-Server memory.

Note: T-Server delivers this version of EventReleased when the DN referred to by the parameter ThisDN is an abstract DN. (Here the attribute ThisDN uses the name of the T-Server application as listed in the Configuration Layer, with a double colon added, or the name of the switch, also with a double colon added.) Clients receive this event each time a call is released on each of the abstract DNs for which they are registered.

Genesys S

Table 90: EventReleased Contents—DEPRECATED

Event Attribute	Туре
ANI	Optional
CallHistory	Optional
CallID	Mandatory
CallState	Mandatory
CallType	Mandatory
ConnID	Mandatory
RefConnID	Optional <sup>a</sup>
CollectedDigits	Optional
CustomerID	Optional
DNIS	Optional
Event	Mandatory
Extensions	Optional
NetworkCallID	Optional
NetworkNodeID	Optional
PreviousConnIDb	Optional
Reasons	Optional
Server	Mandatory
ThisDN <sup>c</sup>	Mandatory
time	Mandatory
TransferredNetworkCallID	Optional
TransferredNetworkNodeID	Optional
UserData	Optional
Reliability	Mandatory

- This attribute is mandatory for call CallStateTransferred, CallStateConferenced, and CallStateRemoteRelease.
- b. The attribute must appear if CallType is Consult.
- c. The attribute ThisDN uses the name of the T-Server application as listed in the Configuration Layer or the name of the switch. In both cases, the indication that EventReleased is based on an abstract DN is through the use of the double colon in the notification, as in AttributeThisDN=<location>::, where location is the name of the T-Server or switch.

# **Example**




Figure 51: EventReleased Feature Example—DEPRECATED

For more information, refer to Chapter 6.

Table 91: Extensions in EventAddressInfo and EventRegistered for Abstract DNs—DEPRECATED

InfoStatus	Attribute Ex	Attribute Extensions			
	Value Description				
InfoType=AddressInfoDNStatus					
NumberOfCalls	conn-%d	string	The ConnectionID of a call (converted into a string)		
	ct-%d	integer	The CallType for the corresponding ConnectionID		

Genesys S

# **Multi-Site Call Scenarios**

A basic principle for multi-site reporting is that T-Server does not try to support the same model for multi-site calls as it does for those that are local. Instead, it is the client's responsibility to merge call information into a single unit based on the call's relationship information provided by T-Server. To help with multi-site call reporting, Genesys has introduced the Inter-Site Link (IS-Link) with the following properties:

- Each IS-Link has a UUID, assigned at the time of creation and reported in ISLinkList.
- For Hot Standby redundant environments, IS-Links on each side are also replicated from the primary to the backup T-Server
- At any moment, IS-Link may be associated with no more than two calls (located on different T-Servers).
  - IS-Link may represent a communication channel, for instance, a voice channel between calls in different switching domains.
  - Alternatively, IS-Link may associate two calls that continue each other, connected together through association with the same external participant, for instance, an incoming call overflowed or re-routed by an external network to another switching domain.
- On each T-Server the IS-Link—associated call is reported in the context of the Calluul, independent of the other T-Server.
- The IS-Link call association does not depend on any T-Server options. In Figure 52, for instance, the link is always connected to the call labelled cons, even if T-Server is instructed to populate the ConnID/UserData of the call labelled or ig for the remote site.
- An IS-Link may be re-attached to a different call on the same T-Server, but only as a result of a merge operation. This action is not reported explicitly, but assumed from EventCallDeleted, with a RefCallUUID attribute specification.
- A call may have more than one associated IS-Link.
- In some scenarios when there is an overflow from a queue, an IS-Link may be attached to a call after the call is reported as deleted.

Figure 52 illustrates a case of three related calls, of which only two are linked together.

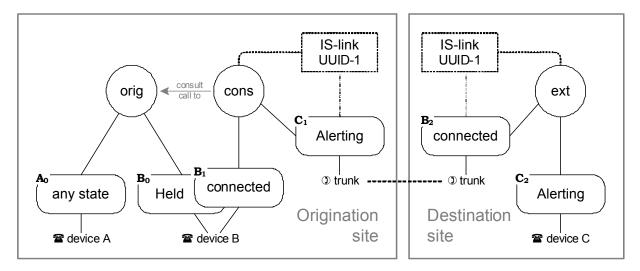


Figure 52: Multi-Site Call Transfer

The association between an IS-Link and a call is reported in EventCallDataChanged, which is distributed to call-monitoring clients. Often, the same event may also report a change in ConnID and UserData as the result of multi-site synchronization.

**Note:** In most cases, IS-Link is attached before the first DN-based event is sent. (That is, before EventRinging and EventRouteRequest.) The exception is with events for trunks that have trunk monitoring.

T-Server clients should be capable of processing later updates.

# Simple Multi-Site Call

In this scenario, events for which are described in Table 92, DN A on Site 1 calls DN B on Site 2.

Table 92: Simple Multi-Site Call

Origination (Site 1)			Destination (Site 2)		
DN-Based Events	Call-Based Notifications	DN-Based Events		Call-Based Notifications	
A: TMakeCall to B (S	ite 2)				
EventDialing CallUUID UUID-X ConnID c (x replaced by ISCC) ThisDN A OtherDN Ba  EventNetwork-Reached (Optional) CallUUID UUID-X ConnID c ThisDN A OtherDN Ba	EventCallCreated CallUUID UUID-X ConnID x  aling D UUID-X C CallUUID UUID-X C ConnID c led by ISCC) A I Ba  twork-Reached l) D UUID-X C A		EventRinging CallUUID UUID-Y ConnID c (y replaced by ISCC)	EventCallCreated CallUUID UUID-Y ConnID y  EventCallData- Changed CallUUID UUID-Y ConnID c	
			ThisDN <b>B</b> OtherDN <b>A</b> <sup>a</sup>	ISLinkList UUID-L@'site1'	
			B: TAnswerCall()		
EventEstablished CallUUID UUID-X ConnID c ThisDN A OtherDN B <sup>a</sup>			EventEstablished CallUUID UUID-Y ConnID c ThisDN B OtherDN A <sup>a</sup>		

# **Multi-Site Call Transfer**

In this scenario, events for which are described in Table 93, DN B on Site 1 initiates a transfer for an existing call to DN C on Site 2.

Table 93: Multi-Site Call Transfer

Origination (Site 1)		Destination (Site 2)	
DN-Based Events	Call-Based Notifications	DN-Based Events	Call-Based Notifications
B is in conversation with A. B: TInitiateTransfer to C (Site 2)			
	EventCallCreated		
	CallUUID <b>UUID-X</b>		
	OriginCallUUID UUID-W		
	ConnID c		
EventDialing	EventCallDataChanged		
CallUUID UUID-X	CallUUID <b>UUID-X</b>		
ConnID cons	ConnID cons		
(c replaced by ISCC)	ISLinkList		
TransferConnID orig	UUID-L@'site2'		
ThisDN <b>B</b>			
OtherDN C			

**Table 93: Multi-Site Call Transfer (Continued)** 

Origination (Site 1)			Destination (Site 2)		
DN-Based Events	Call-Based Notifications		DN-Based Events	Call-Based Notifications	
EventNetwork-Reached (Optional) CallUUID UUID-X ConnID cons TransferConnID orig ThisDN B OtherDN C		_	EventRinging CallUUID UUID-Y ConnID ext <sup>a</sup> (y replaced by ISCC) ThisDN C OtherDN B	EventCallCreated CallUUID UUID-Y ConnID y  EventCallData- Changed CallUUID UUID-Y ConnID exta ISLinkList UUID-L@'site1', (optional: uuid-2B)	
			B: TAnswerCall()		
EventEstablished CallUUID UUID-X ConnID cons ThisDN B OtherDN C			EventEstablished CallUUID UUID-Y ConnID ext <sup>a</sup> ThisDN C OtherDN B		

a. For compatibility with existing solutions, ConnID is assigned at the remote site based on the value of the use-data-from option at the origination T-Server. If there exists a call with a duplicate ConnID, a new, unique ID is generated (and, for DN-based reporting purposes, the reference to the other call is passed in the Last-TransferConnID attribute).

# **Transfer/Conference Completion**

At the completion of a transfer or conference, the origination T-Server distributes the same events as in a standard single-site model. The destination T-Server may not report the completion of the transfer or conference at all, or may report it and even report on the call context change, for instance, if EPP is in effect. Transfer completion might be reported as in Table 94.

For transfer completion, no explicit reporting of changes in call relations is required. EventCallDeleted with RefCallUUID implies a move of all previously attached IS-Links from call UUID-X to UUID-W.

**Table 94: Multi-Site Call Transfer Completion** 

Origination (Site 1)		Destination (Site 2)		
DN-Based Events	Call-Based Notifications		DN-Based Events	Call-Based Notifications
EventReleased CallUUID UUID-W ConnID orig ThisDN B OtherDN A  EventReleased CallUUID UUID-X ConnID cons TransferConnID orig ThisDN B OtherDN C  EventPartyChanged CallUUID UUID-W ConnID orig PreviousConnID orig ThisDN A OtherDN C				
	EventCallDeleted CallUUID UUID-X RefCallUUID UUID-W Cause Transfer CtrlParty B		EventPartyChanged (Optional) CallUUID UUID-Y ThisDN C ConnID orig PreviousConnID ext	EventCallData- Changed (Optional) CallUUID UUID-Y ConnID orig

# **Attaching the IS-Link Post Mortem**

The following three scenarios ("Simple Call Overflow" on page 177, "Overflow On the Intermediate Switch" on page 177, and "Mute Transfer With Overflow" on page 179) describe instances where the IS-Link is assigned in non-standard ways, after the call has been deleted.

# Simple Call Overflow

In the case of call overflow, even for a simple scenario (Table 95), T-Server may discover the relation between two calls only after overflowed call has already been deleted.

**Table 95: Simple Call Overflow** 

Origination (Site 1)		Destination (Site 2)		
DN-Based Events	Call-Based Notifications	DN-Based Events	Call-Based Notifications	
EventQueued CallUUID UUID-X ConnID loc ThisDN B	EventCallCreated CallUUID UUID-X ConnID loc			
OtherDN A				
EventDiverted CallUUID UUID-X ConnID loc ThisDN B OtherDN A	EventCallDeleted CallUUID UUID-X			
	EventCallDataChanged CallUUID UUID-X ISLinkList UUID-L@'site2'	EventQueued CallUUID UUID-Y ConnID rem (y replaced by ISCC) ThisDN C OtherDN A	EventCallCreated CallUUID UUID-Y ConnID y  EventCallData- Changed CallUUID UUID-Y ConnID rem ISLinkList UUID-L@'site1'	

#### **Overflow On the Intermediate Switch**

In the case of a call being overflowed on the intermediate switch (distinct from both the original and destination), or overflowed two or more times, call information may be deleted at the transit site, even if that information still exists at the end site. The reporting is similar to the case of the simple overflow, and is shown in Table 96.

Table 96: Overflow On the Intermediate Switch

Origination (Site 1)	Transit (Site 2)	Destination (Site 3)	
Call-Based Notifications	Call-Based Notifications	Call-Based Notifications	
EventCallCreated	EventCallCreated		
CallUUID UUID-X	CallUUID UUID-Y		
ConnID conn-1	ConnID conn-2		
	EventCallDeleted		
	CallUUID UUID-Y		
EventCallDataChanged	EventCallDataChanged	EventCallCreated	
CallUUID UUID-X	CallUUID UUID-Y	CallUUID <b>UUID-Z</b>	
ConnID rem1	ISLinkList	ConnID conn-3	
ISLinkList	UUID-L1@'site1'		
UUID-L1@'site2'			
	<b>EventCallDataChanged</b>	EventCallDataChanged	
	CallUUID UUID-Y	CallUUID UUID-Z	
	ISLinkList	ConnID rem3	
	UUID-L1@'site1' UUID-L2@'site3'	ISLinkList UUID-L2@'site2'	

## **Mute Transfer With Overflow**

In case of a mute transfer to a remote site, in combination with a call overflow, the relationship between the two calls may be discovered after the active call has been merged into the main call. See Table 97.

**Table 97: Mute Transfer With Overflow** 

Origination (Site 1)		Destination (Site 2)		
DN-Based Events	Call-Based Notifications		DN-Based Events	Call-Based Notifications
•••	•••			
EventPartyChanged CallUUID UUID-W ConnID orig PreviousConnID cons ThisDN A				
	EventCallDeleted CallUUID UUID-X RefCallUUID UUID-W Cause Transfer			
				EventCallCreated CallUUID UUID-Y ConnID y
	EventCallDataChanged CallUUID UUID-X ISLinkList UUID-L@'site2'		EventRinging CallUUID UUID-Y ConnID ext (y replaced by ISCC) ThisDN C OtherDN B	EventCallData-Changed CallUUID UUID-Y ConnID ext ISLinkList UUID-L@'site1'

# **Client-Side IS-Link Processing**

Genesys recommends taking into consideration the following principles when developing for client-side support of multi-site call-linkage discovery.

- If the same IS-Link is listed for two calls, the calls are linked together.
- An IS-Link relation is transitive: If A is linked to B, and B linked to C, then A is also linked to C.

- In order to accommodate overflow scenarios and possible network delays, you should preserve call information, even after EventCallDeleted, for a short time before purging it.
- In order to accommodate transitive call linkage, call information should be preserved as long as there are two or more active IS-Link associations with a call for which information would otherwise be purged. (For instance, avoid unlinking A and C by deleting B's call information.)
- Static storage of IS-Links can be presented in a table indexed by ISLinkUUID. In such a table, each IS-Link record provides placeholders for two calls (UUIDs) and two sites.
- For situations where only a subset of sites is visible to a client or an external routing request proves unsuccessful, the IS-Link record may remain incomplete (refer to one call only). These types of records will be discarded when the single call is purged.
- For dynamic IS-Link storage when one call is merged with another, all IS-Links should be moved to (or applied towards) the remaining call.
- An IS-Link record expires when either of two calls is purged.



**Chapter** 

# 3

# **ISCC Transaction Monitoring**

ISCC Transaction monitoring is a feature for working with multi-site environments. ISCC is an internal T-Server component responsible for T-Server's multi-site operations such as multi-site call transfer, inter-site call linkage, call overflow, and other, possibly non-call—related, multi-site operations. Internally, those operations are called *transactions*.

This chapter describes the interfaces that allow you to work with ISCC Transaction Monitoring: the TTransactionMonitoring() function, the TSubscriptionOperationType enumeration, and EventTransactionStatus. Use these to subscribe and work with this feature. In particular, the key-value pairs of the Extensions attribute returned in EventTransactionStatus expose details of call-transfer availability (the current state of ISCC transactions), such as delays and losses, in the multi-site environment.

The content of this chapter represents the implementation of the transaction model exposed as an extension of the existing T-Library SDK.

This chapter has the following section:

- The Subscription Type, page 181
- Subscribing to Transaction Monitoring, page 182
- The Transaction Monitoring Event, page 184
- Transaction Monitoring States, page 186
- Transaction Monitoring Elements, page 193

## **The Subscription Type**

There is one enumeration that relates to transaction monitoring, TSubscriptionOperationType.

## **TSubscriptionOperationType**

This enumeration defines an operation on a subscription to Transaction Monitoring Feature notifications.

## **Syntax**

```
typedef enum {
    SubscriptionStart,
    SubscriptionStop,
    SubscriptionModify
} TSubscriptionOperationType;
```

#### **Values**

```
Request to create a new subscription.

SubscriptionStop
Request to stop an existing subscription.

SubscriptionModify
Request to modify the rules of an existing subscription.
```

## **Subscribing to Transaction Monitoring**

In order to initiate transaction monitoring, your code must call the following function.

## **TTransactionMonitoring**

This function requests a T-Server to start, stop, or modify a subscription to the Transaction Monitoring Feature notifications. If a request is successful (EventACK), EventTransactionStatus ("EventTransactionStatus" on page 184) is distributed to the requestor.

## **Syntax**

#### **Parameters**

tserver\_handle

Local server handle to the T-Server in question.

subscription\_operation

This parameter represents an operation on a subscription to Transaction Monitoring Feature notifications. Its value is one of TSubscriptionOperationType. A value of this parameter should be provided by the T-Server client.

subscription\_identifier

This parameter represents a subscription identifier. A value should be NULL for the operation SubscriptionStart. For other operations its value should be taken from the message EventACK. It is generated by a T-Server on a creation of a new subscription.

subscription\_rules

This parameter contains subscription rules. A value of this parameter should be provided by the T-Server client. Its value should be NULL for the operation SubscriptionStop. See "Subscription Rules" for details.

#### **Return Values**

The Transaction Monitoring Feature return value is a standard return value for the T-Library API:

- > 0 Reference number (Reference ID) assigned to this request by the T-Library API.
- < 0 Error condition

## **Subscription Rules**

Subscription rules are provided by T-Server clients and passed as part of a notify key-value pair in the Extensions attribute for RequestTransactionMonitoring. They are represented as a key-value list.

Every subscription rule key-value pair contains a notification mode for one element. The key represents the name of the element. The value represents the requested notification mode. If no key has as its name a given element, then that element's default notification mode is used. See "Transaction Monitoring Elements" on page 193 for the list of all default notification modes.

## **Example**

The following is an example RequestTransactionMonitoring with subscription rules included:

AttributeReferenceID reference-id-1
AttributeSubscriptionOperation SubscriptionStart
AttributeExtensions
notify (list)
class.name always
object.local-id<sup>1</sup> always
iscc.transaction.state always
iscc.direction.role once
iscc.is-link-creation never

## **The Transaction Monitoring Event**

You can expect to receive EventTransactionStatus once you have successfully subscribed to transaction monitoring. Information about your subscription request is also available from EventACK, EventError, and EventServerInfo. For descriptions of these general T-Library events and their transaction monitoring specifics, see "EventACK" on page 126, "EventError" on page 134, and "EventServerInfo" on page 119. For descriptions of event attributes generally, see "Event Attributes" on page 146.

#### **EventTransactionStatus**

## **Event Description**

This message is an implementation of Transaction Monitoring Feature notification. This notification is associated with one of the subscriptions requested by the T-Server client. The key-value pairs of the Extensions attribute expose details of call-transfer availability (the current state of ISCC transactions), such as delays and losses, in the multi-site environment.

Table 98: EventTransactionStatus Contents

Event Attribute	Туре
SubscriptionID <sup>a</sup>	Mandatory
Extensions	Mandatory

a. For a description of this attribute, see, in the general event attribute descriptions, "SubscriptionID" on page 158.

Genesys S

<sup>1.</sup> The local attribute represents a unique identifier of the Local Transaction Instance. The value of this attribute is different from the value of the Global Identifier attribute.

## **Examples**

The following examples demonstrate the main requests and expected responses for cases related to transaction monitoring.




Figure 53: Transaction Monitoring Feature: Query Server

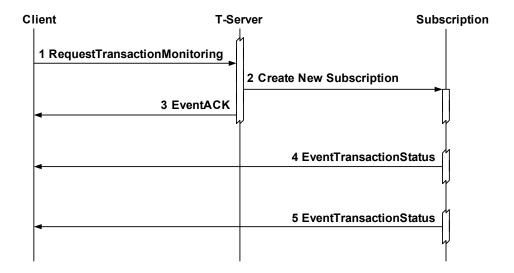


Figure 54: Transaction Monitoring Feature: Subscribe

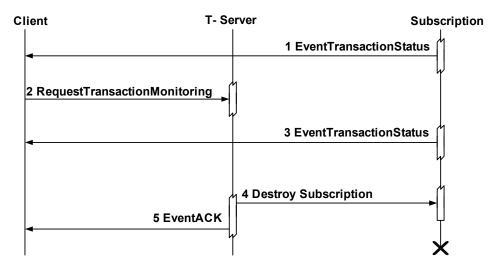


Figure 55: Transaction Monitoring Feature: Unsubscribe

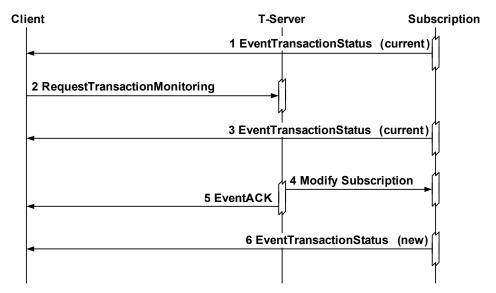


Figure 56: Transaction Monitoring Feature: Modify Subscription

# **Transaction Monitoring States**

This section presents models (including substates and transitions) of the states related to transaction monitoring: the Object, Abstract Transaction, IS Link Creation Feature, Call Operation Feature, and Resource Feature states.

## **Object State**

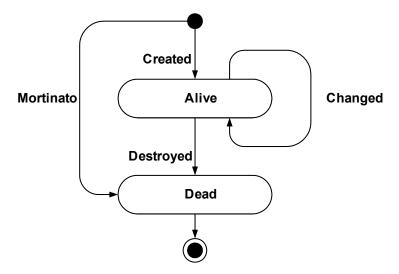


Figure 57: Object State

#### **Transitions**

created	For an object that has just been created; the first transition for every object (from initial to alive).
changed	An object's attributes have been changed (from alive to alive).
destroyed	An object has just been destroyed; the last transition for every object (from alive to dead).
mortinato	An object has been created and destroyed at one time; the last transition for every object (from initial to dead).

## **Appearance**

The Object component is present with every object instance, from the initial to the final transition. All attributes of an object component are present with every object instance at all times. If the object instance has exactly one transition, for instance, iscc.transaction.rejected or iscc.transaction.done, the object component of such an object instance has one transition as well. In this case the transition is object.mortinato. If the object instance has two transitions, for instance, iscc.transaction.started and iscc.transaction.completed, the object component of the object instance has two transitions: object.created and then object.destroyed. If the object instance has more then two transitions, the object component of this object instance is present for every notification event. The first notification event has a transition of object.created. The last notification event has a transition object.destroyed. Notification events that occur between those two have a transition of object.changed.

### **Abstract Transaction State**

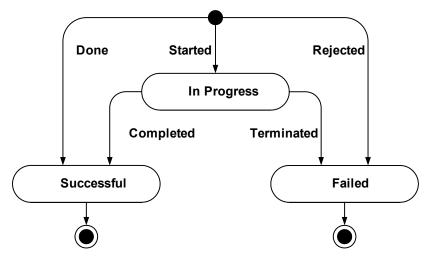


Figure 58: Abstract Transaction State

#### **SubStates**

#### in-progress

The transaction instance is in progress.

#### successful

The transaction instance has successfully completed.

#### failed

The transaction instance has abnormally terminated.

#### **Transitions**

Transaction instance has started (from initial to in-progress).

Transaction instance has completed successfully (from in-progress to successful).

Transaction instance has completed abnormally (from in-progress to failed).

Transaction instance has started and has completed successfully at the same time (from initial to successful). This transition might be considered as two consecutive transitions—started and completed—occurring without an intermediate delay. Such a transition might happen when the initial conditions for this transaction instance are met (all the

Genesys S

required resources are available), and the transaction can be completed at this same time.

rejected

Transaction has started and has completed abnormally at the same time (from initial to failed). You could consider this transition as two consecutive transitions—started and terminated—occurring without an intermediate delay. Such a transition might happen when the initial conditions for this transaction are not met (a required resource is permanently unavailable), or the transaction can never succeed.

## **Appearance**

The Abstract Transaction component is present with every object instance, from the initial to the final transition. All attributes of an abstract transaction component are present with every object instance and at all times.

#### **IS Link Creation Feature State**

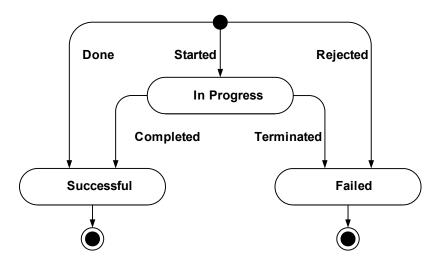


Figure 59: IS Link Creation Feature State

#### **SubStates**

#### in-progress

IS Link creation is in progress.

#### successful

IS Link creation has successfully completed.

#### failed

IS Link creation has terminated abnormally.

#### **Transitions**

started IS Link creation has started (from initial to in-progress).

completed IS Link creation has completed successfully (from in-progress

to successful).

terminated IS Link creation has completed abnormally (from in-progress

to failed).

done IS Link creation has started and has completed successfully at

the same time (from initial to successful). This transition might be considered as two consecutive transitions—started and

completed—occurring without an intermediate delay.

rejected IS Link creation has started and has completed abnormally at

the same time (from initial to failed). You could consider this transition as two consecutive transitions—started and terminated—occurring without an intermediate delay.

## **Appearance**

The IS Link Creation feature component works asynchronously with respect to the Call Operation and Resource features. The IS Link Creation feature component starts when all checks for transaction validity have successfully passed. It ends when the transaction instance ends. Attributes of this component are present with the transaction instance from the time the IS Link Creation feature component starts and till it ends.

## **Call Operation Feature State**

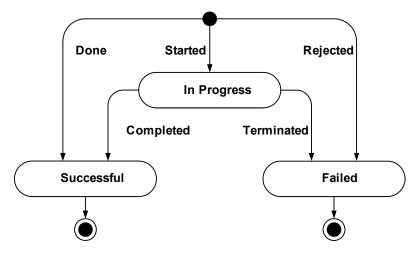


Figure 60: Call Operation Feature State

#### **SubStates**

#### in-progress

Call operation is in progress.

#### successful

Call operation has successfully completed.

#### failed

Call operation has abnormally terminated.

## **Transitions**

started	Call operation has started (from initial to in-progress).	
completed	Call operation has successfully completed (from in-progress to successful).	
terminated	Call operation has completed abnormally (from in-progress to failed).	
done	Call operation has started and completed at the same time (from initial to successful). This transition might be considered as two consecutive transitions—started and completed—occurring without an intermediate delay.	
rejected	Call operation has started and has completed abnormally at the same time (from initial to failed). You could consider this	

transition as two consecutive transitions—started and terminated—occurring without an intermediate delay.

## **Appearance**

The Call Operation feature component works asynchronously with respect to the IS Link Creation and Resource features. The Call Operation feature component starts when ISCC starts performing a given call operation to fulfill a multi-site operation. Usually, it represents a request/response message pair. The Call Operation feature component ends when the transaction instance ends. (The attribute iscc.call-operation.call-id is present when a call related to the call operation is known.)

#### **Resource Feature State**

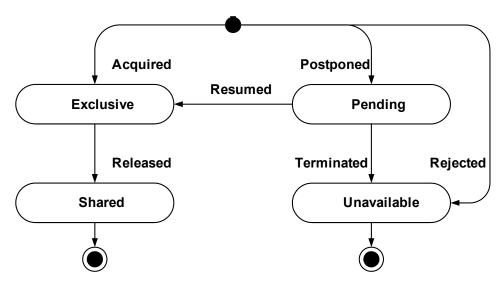


Figure 61: Resource Feature State

#### **SubStates**

#### exclusive

The resource has been acquired in exclusive mode.

#### shared

The resource has been released, and might be acquired by another transaction.

#### pending

A resource is temporarily unavailable.

#### unavailable

A resource is permanently unavailable.

#### **Transitions**

acquired	The resource has been acquired exclusively (from initial to exclusive).
released	The resource has been released (from exclusive to shared).
postponed	The resource is temporarily unavailable; the transaction has been postponed (from initial to pending).
resumed	The resource is available; the transaction has resumed (from pending to exclusive).
rejected	A resource is unavailable permanently from the outset; the transaction has been rejected (from initial to unavailable).
terminated	A resource became unavailable permanently; the transaction has been terminated (from pending to unavailable).

## **Appearance**

The Resource feature component works asynchronously with respect to the IS Link Creation and Call Operation features. The Resource feature component starts when ISCC tries for first time to acquire a resource required for the multi-site operation. The Resource feature component ends when the transaction instance ends. The attribute <code>iscc.resource.name</code> is present from the time when ISCC successfully acquires the corresponding resource.

# **Transaction Monitoring Elements**

Table 99 contains a full list of transaction monitoring elements and their default notification modes.

Table 99: Full Set of Transaction Elements

Element Type	Element Name	Default Notification Mode
feature	class	never
attribute	class.id	never
attribute	class.name	once
attribute	class.namespace	never

Table 99: Full Set of Transaction Elements (Continued)

Element Type	Element Name	Default Notification Mode	
attribute	class.feature-set	once	
feature	object	never	
attribute	object.id	always	
attribute	object.local-id	never	
attribute	object.state	never	
state	object.alive		
state	object.dead		
transition	object.created	never	
transition	object.changed	never	
transition	object.destroyed	never	
transition	object.mortinato never		
namespace	iscc		
feature	iscc.transaction always		
attribute	iscc.transaction.state never		
state	iscc.transaction.in-progress	ress	
state	iscc.transaction.successful		
state	iscc.transaction.failed		
transition	iscc.transaction.started	always	
transition	iscc.transaction.completed	always	
transition	iscc.transaction.terminated always		
transition	iscc.transaction.done always		
transition	iscc.transaction.terminated always		
feature	iscc.direction always		
attribute	iscc.direction.role	once	
feature	iscc.is-link-creation always		

Genesys **S** 

Table 99: Full Set of Transaction Elements (Continued)

Element Type	Element Name	Default Notification Mode	
attribute	iscc.is-link-creation.is-link-id	once	
attribute	iscc.is-link-creation.state never		
state	iscc.is-link-creation.in-progress		
state	iscc.is-link-creation.successful		
state	iscc.is-link-creation.failed		
transition	iscc.is-link-creation.started	always	
transition	iscc.is-link-creation.completed	always	
transition	iscc.is-link-creation.terminated	always	
transition	iscc.is-link-creation.done	always	
transition	iscc.is-link-creation.rejected	always	
feature	iscc.call-operation	always	
attribute	iscc.call-operation.call-id on-change		
attribute	iscc.call-operation.state never		
state	iscc.call-operation.in-progress	ogress	
state	iscc.call-operation.successful		
state	iscc.call-operation.failed		
transition	iscc.call-operation.started	always	
transition	iscc.call-operation.completed	always	
transition	iscc.call-operation.terminated	always	
transition	iscc.call-operation.done always		
transition	iscc.call-operation.rejected always		
feature	iscc.resource always		
attribute	iscc.resource.name once		
attribute	iscc.resource.state never		
state	iscc.resource.exclusive		

Table 99: Full Set of Transaction Elements (Continued)

Element Type	Element Name	Default Notification Mode
state	iscc.resource.shared	
state	iscc.resource.pending	
state	iscc.resource.unavailable	
transition	iscc.resource.acquired	always
transition	iscc.resource.released	always
transition	iscc.resource.postponed	always
transition	iscc.resource.resumed	always
transition	iscc.resource.terminated	always
transition	iscc.resource.rejected	always
class	iscc.transaction-route	always
class	iscc.transaction-direct-callid always	
class	iscc.transaction-reroute always	
class	iscc.transaction-direct-uui	always
class	iscc.transaction-direct-ani	always
class	iscc.transaction-direct-notoken	always
class	iscc.transaction-dnis-pool	always
class	iscc.transaction-direct-digits	always
class	iscc.transaction-pullback	always
class	iscc.transaction-route-uui	always
class	iscc.transaction-network-callid always	
class	iscc.transaction-cof-callid always	
class	iscc.transaction-cof-ani always	
class	iscc.transaction-cof-network-callid always	

Genesys 🥃



Chapter



# **T-Library Unstructured Data**

This chapter describes how T-Server accommodates and allows programmers to work with unstructured data. There are three types of unstructured data supported by T-Server: user data, extensions, and reasons. Accordingly, this chapter is divided according to the following groupings:

- User Data, page 197
- Extensions, page 201
- Reasons, page 205

## **User Data**

Transaction-related *user data* is structured as a list of data items described as key-value pairs, where the key stands for a parameter name and the value represents the current value of that parameter. Each key-value pair may contain information about only one parameter, whose value can be an integer, character string, binary type, or unicode.

#### Warning!

Support for unicode is not backward compatible. Unicode should only be used in uniform 7.0 environments (where all clients use the 7.0 release of T-Library). In mixed environments, clients built with earlier releases of T-Library will not be able to decode unicode sent from 7.0 clients and servers

There is no specific size limitation for the number of key-value pairs or for the size of individual keys or values. However, the total size of the key-value pairs is limited. When in a packed format, the total size of the pairs must not exceed the configured value (default is 16,000 bytes); the configured value has a maximum of 65,535 bytes.

**Note:** Increasing the configured value above 16,000 bytes, a feature introduced with release 7.0, may degrade performance. Moreover, if the value is set above the 16,000-byte default, release 6.5 components of a Genesys environment cannot properly process the data passed to them, and may even become unstable.

## Arrival, Use, and Manipulation of User Data

User Data can arrive at a client application with any event that contains the UserData attribute in its TEvent structure. Client applications should be designed with the ability to view that data. Moreover, since applications may need to create or modify user data and send it to T-Server for processing elsewhere in the system, Genesys provides built-in functions for this purpose.

There are a variety of functions available for the creation and manipulation of user data. (See the *Voice Platform SDK API Reference .NET* or *Java* for details on all such available functions.) While these functions do not generate requests of T-Server, they allow client applications to create contact-related data structures understandable for other T-Server clients and to read and modify contact-related information coming from other clients via T-Server. A created or modified data structure will typically be sent to T-Server using the TAttachUserData() or TUpdateUserData() function (both of which are specified in the tlibrary. h header file). Examples of how to use user data functions are also available with the SDK documentation.

The functions for the creation and manipulation of user data fall into three broad groups: reading functions, creation functions, and modification functions. Reading functions are invoked every time an application wants to use contact-related information for its internal purposes. Creation and modification functions are only used by an application to make new data available to other client applications of T-Server.

## **User Data in Consultation Calls**

In addition to creating and modifying user data, it is also important to provide ways for user data to be shared among parties on a consultation call. T-Server provides three methods of handling user data for consultation calls. In the first method, called the *separate method*, user data for the consultation call is attached and stored separately from the user data attached to the original call. In the second, called the *inherited method*, user data attached to the original call is copied to the consultation call at the moment the consultation call is initiated; after that, any changes to the original call's user data do not affect the consultation call's user data, and vice versa. In the third, called the *joint method*, user data attached to either the original or the consultation call is associated with the original call and, yet, can be seen and changed by the parties of both calls.

A consultation call can be initiated with a T-Library request, such as <code>TInitiateConference()</code>, <code>TInitiateTransfer()</code>, or <code>TMuteTransfer()</code>. Use the <code>Extensions</code> attribute with the <code>ConsultUserData</code> key specified in the request to set the method of handling user data for a consultation call. See "Extensions" on page 149 for details on this attribute in other contexts. A key-value pair with the <code>ConsultUserData</code> key can have the following values:

- default
- separate
- inherited
- joint

#### **Default Value**

Applying the value default to the ConsultUserData key causes T-Server to use the current value specified for its consult-user-data configuration option. See your specific *T-Server Deployment Guide* to learn more about this option. If a conference/transfer request does not contain the ConsultUserData key, the value specified in the consult-user-data option applies. Otherwise, the method of handling user data is based on the value of the ConsultUserData key-value pair of the request.

#### **Separate Method**

Assigning the value separate to the ConsultUserData key tells T-Server to store an original call's user data separately from the consultation call's user data. Consequently, the data attached to the original call is only available to the original call's parties for review and change, while the data attached to the consultation call is only available to the consultation call's parties.

#### Inherited Method

Using the inherited value for the ConsultUserData key tells T-Server to copy the user data from the original call to the user data structure of the consultation call when the consultation call is initiated. After the consultation call is established, its user data is stored separately from the original call's user data. Further changes to the original call's user data are not available to the consultation call's parties and vice versa.

#### Joint Method

Using the joint value for the ConsultUserData key tells T-Server to maintain the same user data structure for the original call and for any number of derived consultation calls. The user data structure is associated with the original call, but any of the parties of the original and consultation calls can see and make changes in the common user data. T-Server associates the user data structure

with the first consultation call in a consultation call chain when the original call has ended. (A consultation call chain is created when a consulted party initiates another consultation call.) If two consultation call chains are created on different legs of the ended original call, T-Server duplicates the user data structure and associates the structures with the chains independently. Further changes of user data made by the parties of one chain will not be visible to the parties of other chains.

#### **User Data in Multi-Site Consultation Calls**

For multi-site (ISCC) consultation calls, in addition to the ConsultUserData key or the consult-user-data option, setting the use-data-from T-Server common option also affects user data. The use-data-from option specifies for a given consultation call that is routed or transferred to a remote location, what the source of its values for the UserData and ConnID attributes should be. (For the full description, see the "Multi-Site Support Section" of the "T-Server Common Configuration Options" chapter of the *T-Server Deployment Guide*.) The following call flow example illustrates how setting these different values affects the availability of user data.

## **Example**

An established call for DN A on site A has a UserData attribute with the key M.

- 1. DN A on site A initiates a conference with DN B on site B. This call has additional UserData with the key C.
- 2. DN A on site A completes the conference.

Events on DN B have the following UserData according to how you set options consult-user-data and use-data-from.

Table 100: Resulting Keys for User Data Based on Use of Different Options

Value of use-data-from	Value of consult-user-data		
	separate	inherited	joint
original	М	М	M; C
active	С	M; C	M; C
current $(1)^a$	С	M; C	M; C
current $(2)^b$	М	М	M; C

a. If UserData is reported after the initiation of the conference, these keys result.

Genesys S

b. If UserData is reported after the completion of the conference, these keys result. The assumption for this case is that the option merged-user-data is set to main-only (the default value).

## **Extensions**

An *extension* is a pointer to a data structure that takes into account switch-specific features and information that cannot be described by the other parameters in an event or a request. The extensions detailed in this section, however, pertain only to requests. They are applicable to all T-Servers and permit tuning of T-Server operations. Extensions for requests that apply only to particular T-Servers are described in the individual *T-Server Deployment Guides*.

**Note:** See Chapter 1, "T-Library Events," page 23 for information on the keyvalue pairs (the extensions) that appear in the Extensions attribute of events (as members of the TEvent structure).

#### **Hardware Reasons in Extensions**

In most cases, hardware-issued reasons are noted in the ReasonCode key-value pair in the Extensions attribute of four specific function calls and their corresponding events. (See "TAgentLogin, TAgentLogout, TAgentSetReady, and TAgentSetNotReady" on page 203 for more information.) However, such issues are not limited to being present in those four functions (or their corresponding events).

Hardware-based reasons, as passed by extensions, are handled differently than Genesys reasons. For an illustration of the handling differences between hardware-based reasons and Genesys reasons, see Figure 62 on page 206.

## **Extensions Common to All T-Servers According to Request**

This section details the relationship between certain extensions and the relationships they may have with specific requests.

#### **ISCC Extensions**

**Note:** With the 7.0 release of T-Library, the iscc prefix for extensions does not necessarily mean that multiple sites are involved in a given request. These extensions are now supported for single-site scenarios as well.

The Extensions attributes in Table 101 apply to requests passed between T-Servers. (In multi-site environments, these are ISCC-processed requests.) The requests that use these extensions include the functions TMakeCall(), TInitiateConference(), TInitiateTransfer(), TMuteTransfer(), TSingleStepTransfer(), TRouteCall(), and TGetAccessNumber().

**Table 101: Extensions Common to All ISCC-Processed Requests** 

Key	Value	Value Description	
iscc-pass-extension <sup>a</sup>	string (local, remote, or both)	Controls where extension attributes are passed from an original client request.	
iscc-xaction-type	integer (or string value of one of the enumerated route types)	Routing type to be used. See TXRouteType() in your API reference for the complete list of route types available.	
iscc-ar-agent-dn	string	Destination DN	
iscc-ar-agent-id	string	Destination agent's ID	
iscc-ar-place	string	The destination agent's place	
iscc-ar-duration	integer	Required time that an agent is to be reserved, in milliseconds (Specify -1 to use the default of 100000 milliseconds.)	
iscc-ar-priority	integer	Requested priority (Specify -1 to use default of 0, the lowest priority value.)	
iscc-ar-priority-1	integer	Additional granularity for setting priority.	
iscc-ar-priority-2	integer	These are only evaluated if there are several concurrent requests with the same iscc-ar-	
iscc-ar-priority-3	integer	priority. If any of these sub-priorities i absent, its value is assumed to be 0.	

a. Exception: Do not use iscc-pass-extension with the TGetAccessNumber() function.

Note: To insure backward compatibility to 6.x and in order to comply with certain T-Servers, the default value for this key-value pair is both. An explicit value for iscc-pass-extensions is expected with ISCC requests when the same extensions interfere with origination and destination T-Servers. When the iscc-pass-extensions pair contains an invalid value, the default value is used.

For all requests taking place between T-Servers, when the cast-type has the value route, extensions are passed to the media device noted in the function TRouteCall() from the ExtRoutePoint to the requested destination. After the first unsuccessful attempt to route a call that arrives at a final destination, subsequent TRouteCall() requests do not contain extensions from an original client's request.

Genesys S

# TAgentLogin, TAgentLogout, TAgentSetReady, and TAgentSetNotReady

The Extensions attribute listed in Table 102 is used to pass hardware reason codes and pertains to all of the following functions: TAgentLogin(), TAgentLogout(), TAgentSetReady(), and TAgentSetNotReady(). Recall that these are the typical, but not the exclusive, functions where hardware-reason codes are found.

Table 102: Extensions in TAgentLogin, TAgentLogout, TAgentSetReady, and TAgentSetNotReady

Key	Value	Value Description
ReasonCode	String	A hardware reason code available for communication through these four function calls.

**Note:** The corresponding events (EventAgentLogin, EventAgentLogout, EventAgentReady, and EventAgentNotReady) for these four functions communicate the hardware reason codes as well.

#### **TMakePredictiveCall**

The Extensions attributes listed in Table 103, for Call Progress Detection (CPD), and Table 104, for Call Party Number (CPN), pertain to the function TMakePredictiveCall(), but are not applicable to all switches. Furthermore, some switches support only some subset of these extensions. Refer to individual T-Server deployment guides for applicability.

Table 103: CPD-Related Extensions in TMakePredictiveCall

Key	Value	Value Description
VoiceDest	Any valid ACD Queue or Routing Point	A Queue or Routing Point to which an outbound call answered by a live voice will be transferred
AnsMachine	Any valid ACD Queue or Routing Point	A Queue or Routing Point to which an outbound call answered by an answering machine will be transferred
FaxDest	Any valid ACD Queue or Routing Point	A Queue or Routing Point to which an outbound call answered by a fax machine will be transferred

**Note:** Depending on switch capabilities and the means of call answer detection, T-Server can route an answered outbound call to a target DN specified in Extensions using the VoiceDest, AnsMachine, or FaxDest key.

Table 104: CPN-Related Extensions in TMakePredictiveCall

Key	Туре	Required	Default	Value Description
CPNType	KVTypeInt	No	0	Number type
CPNPlan	KVTypeInt	No	0	Numbering plan
CPN- Presentation	KVTypeInt	No	0	Presentation indicator
CPN- Screening	KVTypeInt			Screening indicator
CPNDigits	KVType- String	Yes		A5 characters, according to formats specified in the appropriate numbering/dialing plan

# TInitiateConference, TInitiateTransfer, and TMuteTransfer

The Extensions attribute listed in Table 105 applies to the functions <code>TInitiateConference()</code>, <code>TInitiateTransfer()</code>, and <code>TMuteTransfer()</code>. A more detailed description of <code>ConsultUserData</code> appears under "User Data in Consultation Calls" on page 198, above.

Table 105: Extensions in TlnitiateConference, TlnitiateTransfer, TMuteTransfer

Key	Value	Value Description
ConsultUserData	default	The method specified in the consult-user-data configuration option is used.
	separate	User data for the consultation call is attached and stored separately from the user data attached to the original call.
	inherited	User data attached to the original call is copied to the consultation call at the moment the consultation call is initiated; after that, any changes to the original call's user data will not affect the consultation call's user data and vice versa.
	joint	User data attached to either the original or the consultation call is associated with the original call and, yet, can be seen and changed by the parties of both calls.

## **TReserveAgent**

The Extensions attributes listed in Table 106 pertain to the function TReserveAgent().

Table 106: Extensions in TReserveAgent

Key	Value	Value Description
ar-priority-1	integer	Additional granularity for setting priority. These are only evaluated if
ar-priority-2	integer	there are several concurrent requests
ar-priority-3	integer	with the same value for the parameter priority. If any of these sub-priorities is absent, its value is assumed to be 0.

## Reasons

A *reason* is a pointer to an additional data structure that provides information on causes for, and results of, actions taken by the user of ThisDN. If the Reasons attribute appears in the TEvent structure, it has been taken directly from the corresponding T-Library request.

Warning! There is no other source for the information found in the content of the Reasons attribute. Media device/hardware reason codes, and similar information, do not appear in the Reasons attribute. Rather, if they are supported, those hardware reasons are provided by T-Server in the Extensions attribute. Figure 62 diagrams the difference between media-device reasons and the Reasons attribute (Genesys Reasons).

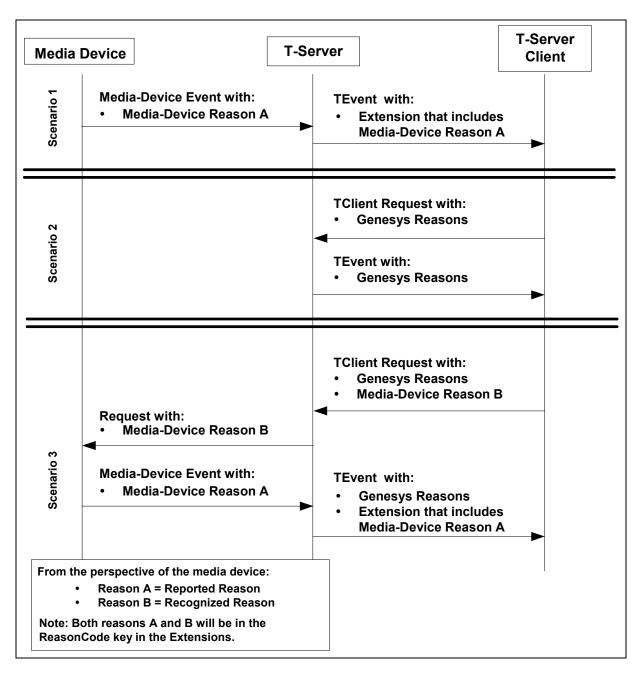


Figure 62: Genesys Reasons versus Media-Device Reasons

#### **Persistent Reasons**

There are times when the value of the Reasons attribute does not pertain to the most recent activity related to the DN or device in question. Such reasons are considered *persistent* or current. In particular, TQueryAddress and TRegisterAddress return the current reason for a DN. This allows applications such as Stat Server to retrieve the state of a DN, with its associated reason, at the time of startup or re-start and improves metrics quality and accuracy.

In any given instance, the value of the Reasons attribute is stored by T-Server in a TKVList. T-Server, however, does not control the context for this list. It therefore becomes the job of the application receiving this value as part of an event to interpret it appropriately. This is not always straightforward, since T-Server only preserves one reason for a given DN at any given time.

Additionally, T-Server only stores reasons that arrive from successful requests. Thus, if you receive an error in response to, for instance, an AgentNotReady request (because the agent or DN could not be set to the not ready state), the reason that you passed with the request is not preserved, and the reason from the previous successful request is still active.

**Note:** In order to erase a reason completely, applications need to pass an empty TKVList in a request (and receive successful confirmation). Requests with NULL as the reason do not affect the current reason. (This is done to preserve backward compatibility.)

To change a reason without changing the state of the agent or DN, you can send a request with a different reason several times. (This is supported for all 7.x T-Servers, by invoking the concept of self-transition states. Some older T-Servers may return errors.)

**Note:** A T-Server synchronizes its Reasons attributes with its backup for use in failover. But there is no resynchronization of these attributes at the time of a backup T-Server's reconnection.



**Chapter** 



# **IVR Protocol Messages**

This chapter presents detailed explanations of the messages and parameters used by the Genesys IVR XML protocol and it includes these sections:

- General Messages, page 209
- Routing Messages, page 212
- Call Treatment Messages, page 213
- External Routing Messages, page 214
- Transfer/Conferencing Messages, page 214
- Call Information Messages, page 216
- Statistics Messages, page 217
- User Data Messages, page 218
- Outbound Messages, page 219

The messages in this chapter are those sent by the IVR Server to the IVR.

# **General Messages**

This section includes the responses to login, logging, and reset messages.

## LoginResp

This message is sent by the IVR Server to the IVR in response to a LoginReq message.

The Status parameter of the LoginResp message has the following possible values. (See Table 107 for a complete list of message parameters.)

NoSuchClient There is no IVR object configured in the Configuration

Layer with the name supplied in the ClientName parameter

of the LoginReq message.

InitInProgress The IVR Server is in the process of initializing and is not

ready to process new calls.

OK Initialization is complete, and the IVR Server can process calls.

Place required configuration information in the data transport section of the IVR Application object in Configuration Manager. If you do this, the information is returned in the Configurations section of the LoginResp message.

**Table 107: LoginResp Message** 

Message	Parameter		Optional/ Required
	Name	Value	Nequired
LoginResp	IServerVersion		Required
	Result	Success InvalidProtocolVersion	Required
	ConfigOptions		Optional
	Status	NoSuchClient InitInProgress OK	Optional

### **MonitorInfo**

This message will be sent when a significant event occurs related to the server monitoring. These will be events pertinent to managing agent status. The ReqId parameter will be present when this event is in response to an XML request, as opposed to an unsolicited event.

See Table 108 for a complete list of message parameters.

**Table 108: MonitorInfo Message** 

Message	Para	meter	Optional/Required
	Name	Value	
MonitorInfo	ReqId		Optional

## **Server Subtype**

A Server type of MonitorInfo message is created when the information being sent is related to T-Server connections. This message is never directly requested by a client, so the ReqId parameter of the MonitorInfo message will never be supplied.

This message will be sent when either an EventLinkDisconnected or EventLinkConnected event occurs, or when the T-Server socket is closed. For this event to be forwarded, it must occur on a T-Server that is used by the IVR. This is based upon the configuration of the IVR in ConfigServer and the name provided by the login request. Server status events are shown in Table 109.

See Table 110 for a complete list of message parameters.

**Table 109: Server Status Events** 

T-library Event	XML
EventLinkConnected	⟨Server Status='OK'/⟩
EventLinkDisconnected/Socket Closed/ No Connection	<pre><server status="Unavailable"></server></pre>

Table 110: Server Message

Message	Parameter		Optional/Required
	Name	Value	
Server	Name		Required
	Status	OK Unavailable	Required
	Switch		Optional

## **Port Subtype**

This message will be sent to inform the client that no further successful requests can be submitted for that port due to configuration database changes. As with the Server subtype; this message will never have a ReqId associated with it.

See Table 111 for a complete list of message parameters.

**Table 111: Port Message** 

Message	Parameter		Optional/Required
	Name	Value	
Port	PortNum		Required
	Status	OK Unavailable	Required

## **Agent Subtype**

Agent related events occurring on relevant ports are conveyed using the Agent subtype. These messages can either be in response to control messages, or due to external sources. When in response to a control message, ReqId from that related message will be used. Table 112 shows the relationship between T-Library events and XML messaging.

**Table 112: Agent Status Events** 

T-library Event	XML
EventAgentLogin	<pre><agent portnum="01" status="LoggedIn"></agent></pre>
EventAgentLogout	<pre><agent portnum="01" status="LoggedOut"></agent></pre>
EventAgentReady	<pre><agent portnum="01" status="Ready"></agent></pre>
EventAgentNotReady	<pre><agent portnum="01" status="NotReady"></agent></pre>

In T-Library, the LoggedIn state is not a steady state, it only indicates that the login was successful. Another status message will always follow the LoggedIn indication to signify whether the agent is in the ready or not ready state. This is a function of the switch and may be one or the other depending on configuration. Therefore, Ready and NotReady imply LoggedIn.

It is also important to note that the query event may return an Unknown state from the switch. As a general rule, treat Unknown as LoggedOut.

See Table 113 for a complete list of message parameters.

**Table 113: Agent Message** 

Message	Para	meter	Optional/Required
	Name	Value	
Agent	PortNum		Required
	Status	LoggedIn LoggedOut Ready NotReady Unknown	Required

# **Routing Messages**

This message is the basic response resulting from requests to start a call, route it, confirm the connection or indicate failure to connect, and end the call.

## RouteResponse

This message is sent by the IVR Server to the IVR to indicate that the call should be routed to the specified destination.

See Table 114 for a complete list of message parameters.

**Table 114: RouteResponse Message** 

Message	Parameter		Optional/ Required
	Name	Value	Nequired
RouteResponse	RouteType	Default Normal Reroute RerouteAttended RerouteConferenced	Present only if supplied by URS.
	Dest ExtnsEx		Optional Optional

# **Call Treatment Messages**

Call treatment messages are used to start and control an external application that processes a call and which might return data that can then be used to route the call.

## **TreatCall**

This message is sent by the IVR Server to the IVR to indicate that the specified call treatment should be run by the IVR.

See Table 115 for a complete list of message parameters.

**Table 115: TreatCall Message** 

Message	Parameter Name	Optional/Required
TreatCall	CallId	Required
	Туре	Required
	Parameters	Optional
	ExtnsEx	Optional

### Cancel

This message is sent by the IVR Server to the IVR to indicate that a previously started call treatment process must be canceled.

See Table 116 for a complete list of message parameters.

**Table 116: Cancel Message** 

Message	Parameter Name	Optional/Required
Cancel		

# **External Routing Messages**

This message is used as a response to a request for an inter-switch transfer.

## **AccessNumResp**

This message is sent by the IVR Server to the IVR to indicate the result of a previous AccessNumGet/AccessNumCancel. The Action parameter indicates to which type of request this message is in response. The access number is only present for a successful AccessNumGet.

See Table 117 for a complete list of message parameters.

Table 117: AccessNumResp Message

Message	Parameter		Optional/Required
	Name	Value	
AccessNumResp	Action	Get Cancel	Required
	Result	Success Failure	Required
	AccessNum		Optional

# **Transfer/Conferencing Messages**

These messages are used to monitor call transfers and conferencing.

## **CallStatus**

This message is sent by the IVR Server to inform the IVR of certain call events. The list of possible events are alternatives. Only one parameter from this list appears in any message.

See Table 118 for a complete list of message parameters.

**Table 118: CallStatus Message** 

Message	Parameter		Optional/Required
	Name	Value	
CallStatus	Event	Dialing	Required
		Ringing	
		Established	
		Retrieved	
		Busy	
		Held	
		ConfPartyAdd	
		ConfPartyDel	
		XferComplete	
		Released	

## **CallError**

This message is sent by the IVR Server to inform the IVR that an error occurred during the setup of a transfer or a conference call.

Errors related to agent control activities will be represented by the AgentControl or the NotAllowed indication. When the error is due to an EventError, the TlibErrCode will be populated with AttributeErrorCode and the type will be AgentControl. NotAllowed will be used exclusively when attempting to control a server controlled port. The user supplied ReqId will be returned in the error.

See Table 119 for a complete list of message parameters.

**Table 119: CallError Message** 

Message	Parameter		Optional/Required
	Name	Value	
CallError	FailedReq	Unknown NoSuchCall OneStepXfer OneStepConf InitConf CompleteConf InitXfer CompleteXfer RetrieveCall MakeCall AgentControl NotAllowed	Required
	TLibErrCode		Optional
	ReqId		Optional

# **Call Information Messages**

This message is in response to a request for data attached to the call.

## **CallInfoResp**

The response contains information on all of the listed parameters for which data has been collected.

**Note:** The value of the FirstHomeLocation parameter is only returned for logins with version 3.0 or later of the IServer.dtd file. This attribute corresponds to T-Library's AttributeFirstTransferHomeLocation attribute. See T-Library events for details.

See Table 120 for a complete list of message parameters.

Table 120: CallinfoResp Message

Message	Parameter Name	Optional/Required
CallInfoResp	ANI	Optional
	DNIS	Optional
	CalledNum	Optional
	ConnId	Optional
	TSCallId	Optional
	PortDN	Optional
	PortTrunk	Optional
	PortQueue	Optional
	OtherDN	Optional
	OtherTrunk	Optional
	OtherQueue	Optional
	LastEvent (The most recently recorded T-Server event.)	Optional
	FirstHomeLocation	Optional

### **Statistics Messages**

The statistics message enables you to receive data on the CurrNumberWaitingCalls and ExpectedWaitTime statistics. These statistics must be configured in Stat Server before they can be accessed through the IVR Server.

#### **StatResp**

Supplies the response to requests for statistics.

See Table 121 on page 218 for a complete list of message parameters.

Table 121: StatResp Message

Message	Parameter		Optional/Required
	Name	Value	
StatResp	RequestId		Required
	ResultCode	Success NoSuchStat MiscError	Required
	Result		Optional

### **User Data Messages**

This message is in response to a request to access and control data about the actions performed by callers.

#### **UDataResp**

This message contains the response to the previous user data messages. The responses for UDataSet and UDataDel indicate either success or, if failure, the reason for the failure.

The response for a successful UDataGet includes the values for the requested keys.

See Table 122 for a complete list of message parameters.

**Table 122: UDataResp Message** 

Message	Parameter		Optional/ Required
	Name	Value	Required
UDataResp	RequestId		Required
	Result	Success NoSuchCall NoMatch FeatureNotSupported MiscError	Required
	UDataEx		Optional

### **Outbound Messages**

#### **DialOutRegistryResp**

Sent from IVR Server to the IVR, this message returns information about the related DialOutRegistry message. ConfigError is returned when the corresponding DN from the DialOutRegistry message either is not defined in the Configuration Layer or is not a route point. MiscFailure is currently not used. Success will be returned in all other cases. When using commands Remove and RemoveAll, Success will always be returned.

See Table 123 for a complete list of message parameters.

Table 123: Dial Out Registry Resp Message

Message	Parameter		Optional/Required
	Name	Value	
DialOutRegistryResp	Result	MiscFailure ConfigError Success	Required

#### **DialOut**

Sent from IVR Server to the IVR, this message indicates that an outbound call has been requested. Values from the original TMakePredictiveCall are included in this message where UDataEx and ExtnsEx are AttributeUserData and AttributeExtensions, respectively. Also, OrigNum is retrieved from AttributeThisDN and DestNum is AttributeOtherDN. TimeToAnswer gives the amount of time, in seconds, that the IVR should allow for an outbound call to be answered before a NoAnswer failure should be returned.

See Table 124 for a complete list of message parameters.

Table 124: Dial Out Message

Message	Parameter		Optional/Required
	Name	Value	
DialOut	OrigNum		Required
	DestNum		Required
	RefID		Required
	TimeToAnswer		Required



**Part** 

2

# **Genesys Interaction Models**

Part Two of this document contains information on a selected list of call and interaction models. This information ranges from basic call scenarios to complex, but common ones. Based on the history of how this information has been presented in the past in various documents, model details may differ from chapter to chapter. This information appears in the following chapters:

- Chapter 6, "Call Models and Flows," on page 223 presents the bulk of Genesys voice-based models. In this case, you can view call model details, and network attended transfer call flows. In each case, selected event information is provided to enhance your understanding of the model.
- Chapter 7, "Basic Interaction Models," on page 393 offers a look at selected models for interactions of non-voice type.
- Chapter 8, "IVR Call Flows," on page 447 contains the standard IVR call flows, with annotations.



#### Chapter



### **Call Models and Flows**

The information in this chapter is divided among the following sections:

- Legend, page 223
- List of Call Models, page 225
- Basic Call Models, page 229
- Releasing Calls, page 258
- Holding, Transferring, and Conferencing, page 261
- Handling User Data, page 307
- Special Cases, page 310
- Predictive Dialing, page 343
- Monitoring Calls, page 357
- Working With Queues, page 370
- Network T-Server Attended Transfer Call Flows, page 379

#### Legend

All parties shown in a call scenario, except where stated explicitly, are considered internal and are monitored by T-Server. If one or more external parties participated in the call, the following apply:

- T-Server will not distribute any events to the external (nonmonitored) party.
- T-Server may not have any information about the nonmonitored party, so its reference may not be specified.

Figure 63 illustrates a basic call model.

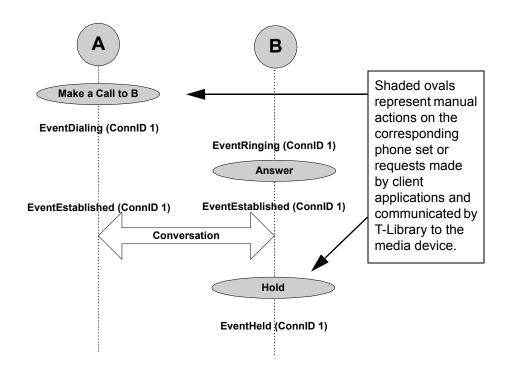


Figure 63: Sample Call Model

Activities like conference and transfer can be performed to an existing multiparty call (a conference call). When so, Party A is considered a "complex party" and the following apply:

- Events assigned to Party A, as shown in call scenarios, are sent to every party of "complex party."
- Reference to Party A in AttributeOtherDN are not present.

This is also represented in Table 125 and Table 126.

**Table 125: Depiction of Complex Parties in Call Models 1** 

PARTY A (complex)	PARTY C
<b>EventPartyChanged</b>	EventPartyChanged
ConnID 1	ConnID 1
ThisDN A	ThisDN C
OtherDN C	OtherDN <b>A</b>



Table 126: Depiction of Complex Parties in Call Models 2

PARTY A0	PARTY A1	PARTY C
EventPartyChanged	EventPartyChanged	EventPartyChanged
ConnID 1	ConnID 1	ConnID 1
ThisDN A0	ThisDN A1	ThisDN C
OtherDN C	OtherDN C	

Since T-Library is a superset of functions, not every scenario described in this document is supported by every type of switch. For more details, see the *T-Server Deployment Guide* that applies to your T-Server/switch pair.

When more than one event is presented in one table cell, the order in which the events are distributed may vary.

Attributes ThirdPartyDN and ThirdPartyDNRole specify DNs to which two-step operations are initiated and completed.

A call is considered to be queued until either EventDiverted or EventAbandoned regarding the queue is generated.

#### **Comments**

\*OPT Optional.

\*DIAL May be a dialed number or is not present if T-Server has no

information about the other party.

### **List of Call Models**

Table 127 presents the list of call models documented in this chapter.

**Table 127: List of Call Models** 

Call Model	Page
Basic Call Models	
Simple Call Model	page 229
Connection-Establishing Phase (Internal/Inbound Call)	page 230
Connection-Establishing Phase (Internal/Inbound Call to ACD)	page 233
Connection-Establishing Phase (Call Queued to Multiple ACDs)	page 236

Table 127: List of Call Models (Continued)

Call Model	Page	
Connection-Establishing Phase (Internal/ Inbound Call with Call Parking)	page 240	
Connection-Establishing Phase (Internal/Inbound Call with Routing—RouteQueue Case)	page 243	
Connection-Establishing Phase (Internal/Inbound Call with Routing)	page 247	
Connection-Establishing Phase (Internal/ Inbound Call with Routing Outbound)	page 251	
Connection-Establishing Phase (Outbound Call)	page 254	
Connection-Establishing Phase While On Hold (Internal/Outbound Call)	page 257	
Releasing Calls		
Release Phase	page 258	
Release from Conference Phase	page 259	
Delete from Conference Phase	page 260	
Holding, Transferring, and Conferencing		
Hold/Retrieve Function, Consulted Party Answers	page 262	
Hold/Retrieve Function, Consulted Party Does Not Answer	page 265	
Single-Step Transfer	page 268	
Single-Step Transfer (Outbound)	page 271	
Mute Transfer	page 274	
Two-Step Transfer: Complete After Consulted Party Answers	page 277	
Two-Step Transfer: (Blind) Complete Before Consulted Party Answers	page 280	
Two-Step Transfer: to ACD	page 283	
Two-Step Transfer: to a Routing Point	page 288	
Trunk Optimization: Trunk Anti-Tromboning	page 292	
Single-Step Conference	page 294	

Genesys **S** 

Table 127: List of Call Models (Continued)

Call Model	Page	
Conference	page 296	
Blind Conference (Complete Before Consulted Party Answers)	page 300	
Conference with Two Incoming Calls Using TMergeCalls	page 304	
Handling User Data		
Attaching/Updating User Data to Internal Call	page 307	
Attaching/Updating User Data to Call by Third Party	page 308	
Special Cases		
Outbound Call to a Busy Destination	page 310	
Rejected Call	page 312	
Internal Call to Destination with DND Activated	page 316	
Call Forwarding (on No Answer)	page 318	
Alternate-Call Service	page 321	
Reconnect-Call Service	page 323	
Redirect-Call Service	page 325	
Internal/Inbound Call with Bridged Appearance	page 328	
Outbound Call from Bridged Appearance	page 331	
Hold/Retrieve for Bridged Appearance	page 334	
Internal/Inbound Call Answerable by Several Agents (Party B Answers)	page 336	
Call Treatment with Routing	page 339	
Predictive Dialing		
Predictive Call	page 343	
Predictive Call with Routing	page 347	
Predictive Call (Connected to a Device Specified in Extensions)	page 352	

Table 127: List of Call Models (Continued)

Call Model	Page
Monitoring Calls	
Service Observing on Agent	page 357
Service Observing for Agent-Initiated Call	page 363
Service Observing on Queue	page 366
Working With Queues	
Multiple-Queue Call Treated at IVR Port: Treatment at IVR Queue	page 370
Multiple-Queue Call Treated at IVR Port: Direct Treatment at IVR Port	page 374
Multiple-Queue Call: Call Removed from Queue	page 377
Handling Network Calls	
Standard Network Call Initiation	page 379
Consultation Leg Initiation, Specific Destination	page 380
Failed Consultation: Specific Target	page 381
Consultation Leg Initiation, URS Selected Destination	page 381
Failed Consultation: URS Selected Destination	page 382
Transfer/Conference Completion: Explicit	page 383
Transfer Completion: Implicit	page 384
Conference Completion	page 385
Alternate Call Service	page 385
Alternate Call Service with Transfer Completion	page 386
Explicit Reconnect	page 388
Implicit Reconnection (by SCP)	page 388
Implicit Reconnection (by Network T-Server)	page 388
Caller Abandonment	page 389
Network Single-Step Transfer	page 390
Premature Disconnection, One Variation 1	page 390

Genesys **S** 

**Table 127: List of Call Models (Continued)** 

Call Model	Page
Premature Disconnection, a Second Variation	page 391
Transactional Error	page 392

#### **Basic Call Models**

This section documents the basic scenarios under which calls arrive in a contact center.

#### **Simple Call Model**



Figure 64: Simple Call Model

#### **Connection-Establishing Phase (Internal/Inbound Call)**

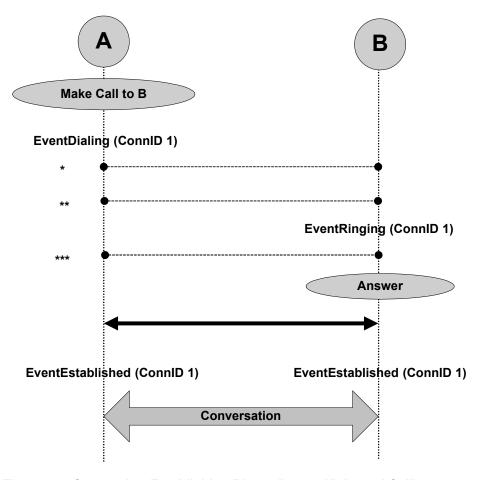


Figure 65: Connection-Establishing Phase (Internal/Inbound Call)

Table 128: Connection-Establishing Phase (Internal/Inbound Call)

PARTY A	PARTY B
Make Call to B (TMakeCall)	
EventDialing	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN *DIAL	
OtherDNRole <b>Destination</b> *DIAL	

Table 128: Connection-Establishing Phase (Internal/Inbound Call) (Continued)

PARTY A	PARTY B
	EventRinging
	ConnID 1
	ThisDN <b>B</b>
	ThisDNRole <b>Destination</b>
	OtherDN A
	OtherDNRole Origination
	CallState <b>OK</b>
	Answer (TAnswerCall)
EventEstablished	Answer (TAnswerCall)  EventEstablished
EventEstablished ConnID 1	,
	EventEstablished
ConnID 1	EventEstablished ConnID 1
ConnID 1 ThisDN A	EventEstablished ConnID 1 ThisDN B
ConnID 1 ThisDN A ThisDNRole Origination	EventEstablished ConnID 1 ThisDN B ThisDNRole Destination

**Table 129: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B
*	EventReleased	
	ConnID 1	
	ThisDN A	
	ThisDNRole <b>Origination</b>	
	CallState <b>OK</b>	

**Table 129: Abnormal Call Flow (Continued)** 

Interruption Point	PARTY A	PARTY B
**	EventDestinationBusy	
	ConnID 1	
	ThisDN A	
	ThisDNRole <b>Origination</b>	
	CallState <sup>a</sup>	
***	EventReleased	EventAbandoned
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	ThisDNRole <b>Origination</b>	OtherDN A
	OtherDN <b>B</b> *DIAL	CallState <b>OK</b>
	OtherDNRole <b>Destination</b> *DIAL	
	CallState <b>OK</b>	

a. CallState may have values that clarify the reason for the destination being busy, for instance CallStateSitInvalidNum.

# **Connection-Establishing Phase (Internal/Inbound Call to ACD)**

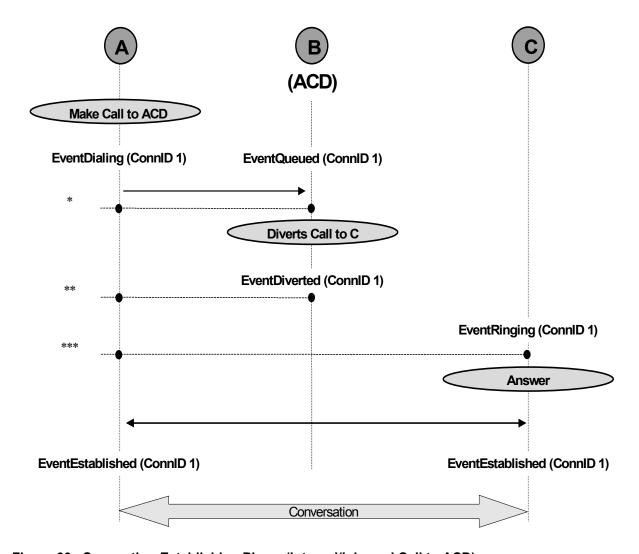


Figure 66: Connection-Establishing Phase (Internal/Inbound Call to ACD)

Table 130: Connection-Establishing Phase (Internal/Inbound Call to ACD)

PARTY A	PARTY B (ACD Group)	PARTY C
Make Call to B		
EventDialing	EventQueued	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisQueue <b>B</b>	
OtherDN <b>B</b> *DIAL	ThisDNRole <b>Destination</b>	
OtherDNRole	OtherDN A	
<b>Destination</b> *DIAL	OtherDNRole Origination	
	Diverts call to C	
	EventDiverted	
	ConnID 1	
	ThisDN B	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole Origination	
	ThirdPartyDN C *OPT	
	ThirdPartyDNRole <b>Destination</b> *OPT	
		EventRinging
		ConnID 1
		ThisDN C
		ThisQueue <b>B</b>
		ThisDNRole <b>Destination</b>
		OtherDN A
		OtherDNRole <b>Origination</b>
		CallState <b>OK</b>

Table 130: Connection-Establishing Phase (Internal/Inbound Call to ACD) (Continued)

PARTY A	PARTY B (ACD Group)	PARTY C
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole Origination		ThisQueue <b>B</b>
OtherDN C		ThisDNRole <b>Destination</b>
OtherDNRole <b>Destination</b>		OtherDN A
		OtherDNRole Origination
Conversation		

**Table 131: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN <b>B</b>		
	CallState <b>OK</b>		
***	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

# Connection-Establishing Phase (Internal/Inbound Call Queued to Multiple ACDs)

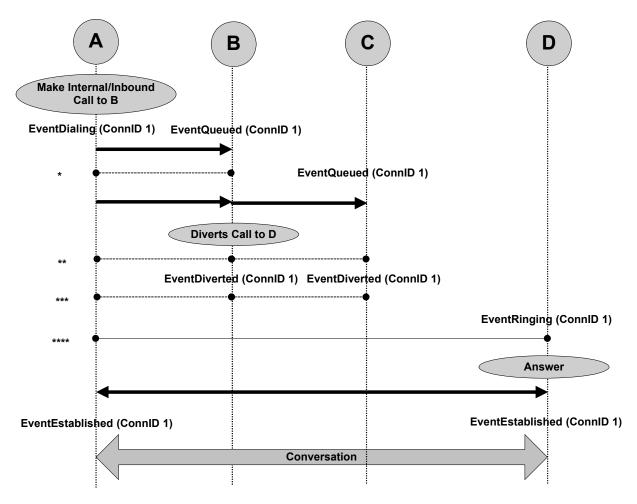


Figure 67: Connection-Establishing Phase (Internal/Inbound Call Queued to Multiple ACDs)

Table 132: Connection-Establishing Phase (Internal/Inbound Call Queued to Multiple ACDs)

PARTY A	PARTY B (ACD)	PARTY C (ACD)	PARTY D
Make Internal/Inbound Call to B (ACD)			
EventDialing	EventQueued		
ConnID 1	ConnID 1		
ThisDN A	ThisDN <b>B</b>		
ThisDNRole	ThisQueue <b>B</b>		
Origination OtherDN B *DIAL	ThisDNRole		
	<b>Destination</b>		
OtherDNRole <b>Destination</b> *DIAL	OtherDN A		
	OtherDNRole Origination		
		EventQueued	
		ConnID 1	
		ThisDN C	
		ThisQueue C	
		ThisDNRole <b>Destination</b>	
		OtherDN A	
		OtherDNRole Origination	
	Diverts Call to D		
	EventDiverted	EventDiverted	
	ConnID 1	ConnID 1	
	ThisDN <b>B</b>	ThisDN C	
	ThisDNRole	ThisQueue C	
	Origination	ThirdPartyDN <b>D</b>	
	OtherDN C	ThirdPartyQueue <b>B</b>	
	OtherDNRole <b>Destination</b>	CallState <b>Redirected</b> <sup>a</sup>	

Table 132: Connection-Establishing Phase (Internal/Inbound Call Queued to Multiple ACDs) (Continued)

PARTY A	PARTY B (ACD)	PARTY C (ACD)	PARTY D
			EventRinging
			ConnID 1
			ThisDN <b>D</b>
			ThisQueue <b>B</b>
			ThisDNRole <b>Destination</b>
			OtherDN A
			OtherDNRole Origination
			CallState <b>OK</b>
			Answer (TAnswerCall)
EventEstablished			EventEstablished
ConnID 1			ConnID 1
ThisDN A			ThisDN <b>D</b>
ThisDNRole <b>Origination</b>			ThisDNRole <b>Destination</b>
OtherDN <b>D</b>			OtherDN A
OtherDNRole <b>Destination</b>			OtherDNRole Origination
CallState <b>OK</b>			CallState <b>OK</b>
	Conve	rsation	

a. For ACD configurations where calls are distributed to agents assigned directly to ACD groups, CallState and its value of Redirected are present.

For ACD configurations where calls are distributed to agents assigned to secondary ACD groups associated with top-level ACD queues, the CallState, with the value Redirected, is not present.

**Table 133: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
*	EventReleased	EventAbandoned		
	ConnID 1	ConnID 1		
	ThisDN A	ThisDN <b>B</b>		
	OtherDN <b>B</b>	ThisQueue <b>B</b>		
	CallState <b>OK</b>	OtherDN A		
		CallState <b>OK</b>		
**	EventReleased	EventAbandoned	EventAbandoned	
	ConnID 1	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	ThisDN C	
	OtherDN B	ThisQueue <b>B</b>	ThisQueue C	
	CallState <b>OK</b>	OtherDN A	OtherDN A	
		CallState <b>OK</b>	CallState <b>OK</b>	
***	EventReleased			
	ConnID 1			
	ThisDN A			
	OtherDN <b>D</b>			
	CallState <b>OK</b>			
****	EventReleased			EventAbandoned
	ConnID 1			ConnID 1
	ThisDN A			ThisDN <b>D</b>
	OtherDN <b>D</b>			ThisQueue C
	CallState <b>OK</b>			OtherDN A
				CallState <b>OK</b>

# Connection-Establishing Phase (Internal/Inbound Call with Call Parking)

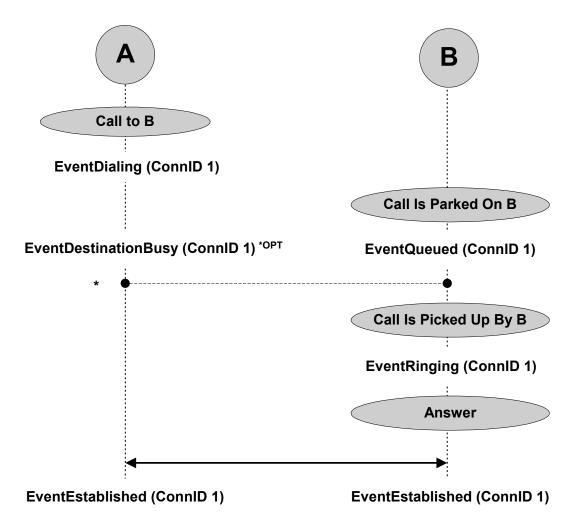


Figure 68: Connection-Establishing Phase (Internal/Inbound Call with Call Parking)

Table 134: Connection-Establishing Phase (Internal/Inbound Call with Call Parking)

PARTY A	PARTY B
Make Call To B (TMakeCall)	
EventDialing	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
	Call Is Parked On B
EventDestinationBusy *OPT	EventQueued
ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>
ThisDNRole Origination	ThisDNRole <b>Destination</b>
OtherDN <b>B</b> *DIAL	OtherDN A
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination
	CallState <b>OK</b>
	Call Is Picked Up By B
	EventRinging *RE
	ConnID 1
	ThisDN <b>B</b>
	ThisDNRole <b>Destination</b>
	OtherDN A
	OtherDNRole Origination
	CallState <b>OK</b>

Table 134: Connection-Establishing Phase (Internal/Inbound Call with Call Parking) (Continued)

PARTY A	PARTY B
	Answer (TAnswerCall)
EventEstablished	EventEstablished
ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>
ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>
OtherDN B	OtherDN A
OtherDNRole <b>Destination</b>	OtherDNRole Origination
Conversation	

**Table 135: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B
*	EventReleased	EventAbandoned
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	ThisDNRole <b>Origination</b>	OtherDN A
	OtherDN <b>B</b> *DIAL	CallState <b>OK</b>
	OtherDNRole <b>Destination</b> *DIAL	
	CallState <b>OK</b>	

## Connection-Establishing Phase (Internal/Inbound Call with Routing—RouteQueue Case)

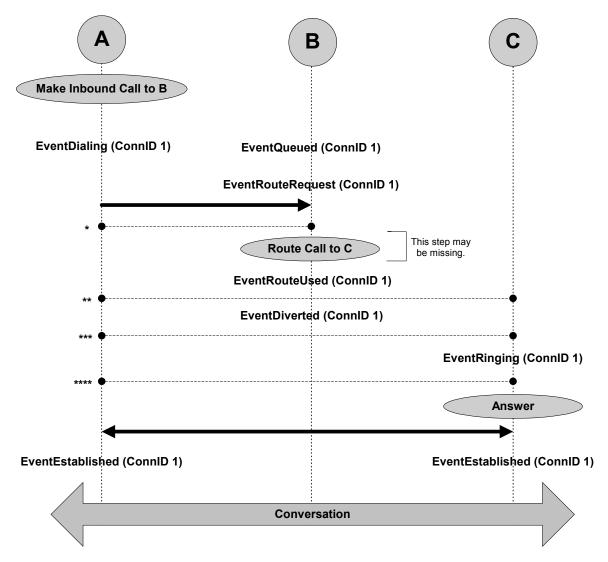


Figure 69: Connection-Establishing Phase, Internal/Inbound Call with Routing (RouteQueue Case)

Table 136: Connection-Establishing Phase, Internal/Inbound Call with Routing (RouteQueue Case)

PARTY A	PARTY B (Routing Point/CDN)	PARTY C
Make Incoming Call to Information Service		
EventDialing	EventQueued	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisQueue <b>B</b>	
OtherDN <b>B</b>	ThisDNRole <b>Destination</b>	
OtherDNRole <b>Destination</b>	OtherDN A	
	OtherDNRole Origination	
	EventRouteRequest	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole Origination	

Table 136: Connection-Establishing Phase, Internal/Inbound Call with Routing (RouteQueue Case) (Continued)

PARTY A	PARTY B (Routing Point/CDN)	PARTY C
	Route Call to C (TRouteCall) <sup>a</sup>	
	EventRouteUsed	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole <b>Origination</b>	
	ThirdPartyDN C *OPT	
	ThirdPartyDNRole <b>Destination</b> *OPT	
	EventDiverted	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole <b>Origination</b>	
	ThirdPartyDN C *OPT	
	ThirdPartyDNRole <b>Destination</b> *OPT	
		EventRinging
		ConnID 1
		ThisDN C
		ThisQueue <b>B</b>
		ThisDNRole <b>Destination</b>
		OtherDN A
		OtherDNRole Origination
		CallState <b>OK</b>

Table 136: Connection-Establishing Phase, Internal/Inbound Call with Routing (RouteQueue Case) (Continued)

PARTY A	PARTY B (Routing Point/CDN)	PARTY C
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole Origination		ThisDNRole <b>Destination</b>
OtherDN C		OtherDN A
OtherDNRole <b>Destination</b>		OtherDNRole Origination
Conversation		

a. RouteCall to C (TRouteCall()) may be missing.

**Table 137: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
And	ConnID 1	ConnID 1	
**	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
***	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		
****	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

# Connection-Establishing Phase (Internal/Inbound Call with Routing)

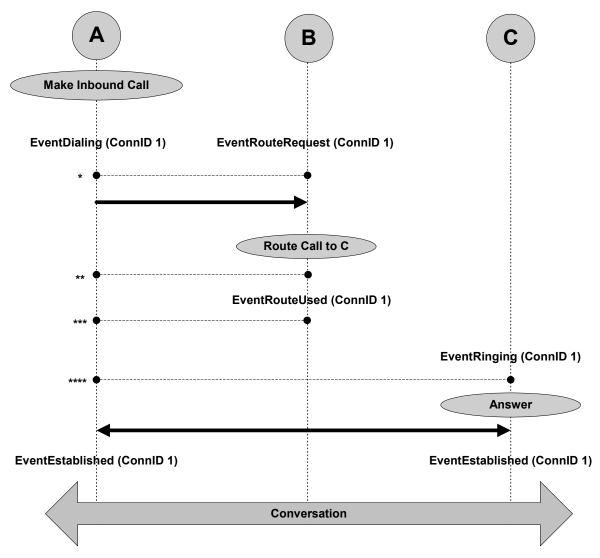


Figure 70: Connection-Establishing Phase (Internal/Inbound Call with Routing)

Table 138: Connection-Establishing Phase (Internal/Inbound Call with Routing)

PARTY A	PARTY B (Routing Point/CDN)	PARTY C
Make Incoming Call to Information Service		
EventDialing	EventRouteRequest	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b> *DIAL	OtherDN A	
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination	
	Route Call to C <sup>a</sup> (TRouteCall)	
	EventRouteUsed	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole Origination	
	ThirdPartyDN C b	
	ThirdPartyDNRole <b>Destination</b> *OPT	
	CallState <b>OK/Redirected</b> <sup>c</sup>	
		EventRinging
		ConnID 1
		ThisDN C
		ThisDNRole <b>Destination</b>
		OtherDN A
		OtherDNRole Origination
		CallState <b>OK</b>

Table 138: Connection-Establishing Phase (Internal/Inbound Call with Routing) (Continued)

PARTY A	PARTY B (Routing Point/CDN)	PARTY C
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole Origination		ThisDNRole <b>Destination</b>
OtherDN C		OtherDN A
OtherDNRole <b>Destination</b>		OtherDNRole <b>Origination</b>
Conversation		

- a. Not present if a call has been routed by default; that is, a switch did not receive any routing instruction from a computer domain within a timeout configured on the switch side (scripted or otherwise) and therefore processed the call using switch logic.
- b. Content of ThirdPartyDN depends on the call scenario:
  - If information about the destination is available at the moment EventRouteUsed is generated, this attribute is mandatory; a DN where the call has been delivered must be reported.
  - If the information is not available, but the call has been routed through T-Server, this attribute is mandatory; a DN where the call has been sent must be reported.
  - If a call has been routed to a default destination or routed by another application, this attribute is optional (depends on switch capabilities).
- c. CallState has a value of Redirected (22) if a call has been routed by a switch. For Aspect ACD, Rockwell Spectrum, and Hicom 300 E CS switches, the attribute Callstate is not present.

**Table 139: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased	<b>EventAbandoned</b> <sup>a</sup>	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN C	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
***	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		
****	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

a. EventError must be sent after EventAbandoned in this case to make the ReferenceID available.

## Connection-Establishing Phase (Internal/Inbound Call with Routing Outbound)

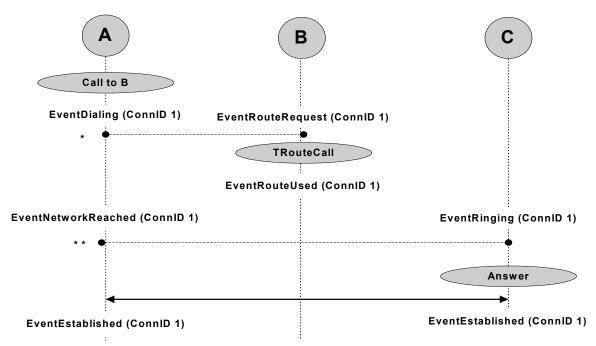


Figure 71: Connection-Establishing Phase (Internal/Inbound Call with Routing Outbound)

Table 140: Connection-Establishing Phase (Internal/Inbound Call with Routing Outbound)

PARTY A	PARTY B (Routing Point)	PARTY C
Incoming Call		
EventDialing	EventRouteRequest	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b> *DIAL	OtherDN A	
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination	
	Route Call to C <sup>a</sup> (TRouteCall)	

Table 140: Connection-Establishing Phase (Internal/Inbound Call with Routing Outbound) (Continued)

PARTY A	PARTY B (Routing Point)	PARTY C
	EventRouteUsed	
	ConnID 1	
<b>EventNetworkReached</b>	ThisDN <b>B</b>	EventRinging
ConnID 1	ThisDNRole <b>Destination</b>	ConnID 1
ThisDN A	OtherDN A	ThisDN C
ThisDNRole Origination	OtherDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>
OtherDN $\mathbf{C}^{*\mathrm{DIAL}}$	ThirdPartyDN C <sup>b</sup>	OtherDN A
OtherDNRole <b>Destination</b> *DIAL	ThirdPartyDNRole <b>Destination</b> *OPT	OtherDNRole <b>Origination</b> CallState <b>OK</b>
	CallState <b>OK/Redirected</b> <sup>c</sup>	Calistate <b>OK</b>
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole Origination		ThisDNRole <b>Destination</b>
OtherDN C		OtherDN A
OtherDNRole <b>Destination</b>		OtherDNRole Origination
Conversation		

- a. Not present if a call has been routed by default; that is, a switch did not receive any routing instruction from a computer domain within a timeout configured on the switch side (scripted or otherwise) and therefore processed the call using switch logic.
- b. Content of ThirdPartyDN depends on the call scenario:
  - If information about the destination is available at the moment EventRouteUsed is generated, this attribute is mandatory; a DN where the call has been delivered must be reported
  - If the information is not available, but the call has been routed through T-Server, this attribute is mandatory; a DN where the call has been sent must be reported
  - If a call has been routed to a default destination or routed by another application, this attribute is optional (depends on switch capabilities)
- c. CallState has a value of Redirected (22) if a call has been routed by a switch. For Nortel Communication Server 1000 with SCCS MLS, Aspect ACD, Rockwell Spectrum, and Hicom 300 E CS switches, the attribute CallState is not present.

Genesys S

**Table 141: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

### **Connection-Establishing Phase (Outbound Call)**

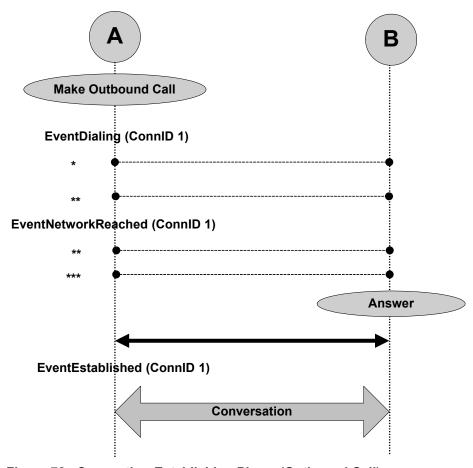


Figure 72: Connection-Establishing Phase (Outbound Call)

**Table 142: Connection-Establishing Phase (Outbound Call)** 

PARTY A	PARTY B
Make Outside Call (TMakeCall)	
EventDialing	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	

**Table 142: Connection-Establishing Phase** (Outbound Call) (Continued)

PARTY A	PARTY B	
EventNetworkReached <sup>a</sup>		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN <b>B</b> *DIAL		
OtherDNRole <b>Destination</b> *DIAL		
	Answer	
EventEstablished		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN <b>B</b> *OPT		
OtherDNRole <b>Destination</b> *OPT		
Conversation		

a. When a switch does not report network reached, T-Server simulates EventNetworkReached right before distributing EventEstablished.

**Table 143: Abnormal Call Flow** 

Interruption Point	PARTY A
*	EventReleased
	ConnID 1
	ThisDN A
	OtherDN B
	CallState <b>OK</b>

**Table 143: Abnormal Call Flow (Continued)** 

Interruption Point	PARTY A
**	EventDestinationBusy
	ConnID 1
	ThisDN A
	OtherDN B
	CallState <sup>a</sup>
***	EventReleased
	ConnID 1
	ThisDN A
	OtherDN B
	CallState <b>OK</b>

a. CallState may have values that clarify the reason for the destination being busy, for instance CallStateSitInvalidNum.

# Connection-Establishing Phase While On Hold (Internal/Outbound Call)

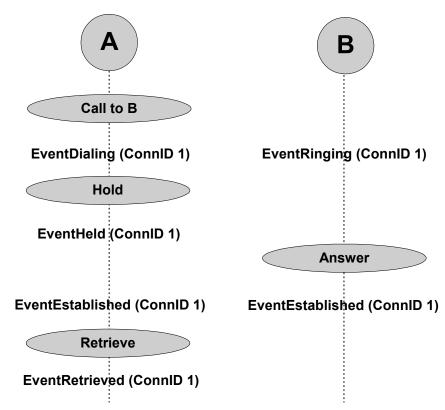


Figure 73: Connection-Establishing Phase While On Hold (Internal/Outbound Call)

Table 144: Connection-Establishing Phase While On Hold (Internal/Outbound Call)

PARTY A	PARTY B	
Call to B		
EventDialing	EventRinging	
ConnID 1	ConnID 1	
ThisDN A	ThisDN B	
ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b>	OtherDN A	
OtherDNRole <b>Destination</b>	OtherDNRole Origination	
CallState <b>OK</b>	CallState <b>OK</b>	
Hold		

Table 144: Connection-Establishing Phase While On Hold (Internal/Outbound Call) (Continued)

PARTY A	PARTY B
EventHeld	
ConnID 1	
ThisDN A	
OtherDN <b>B</b>	
	Answer
EventEstablished	EventEstablished
ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>
OtherDN <b>B</b>	OtherDN A
Retrieve	
EventRetrieved	
ConnID 1	
ThisDN A	
OtherDN <b>B</b>	
CallState <b>OK</b>	

## **Releasing Calls**

This section illustrates the standard processes by which calls are released.

### **Release Phase**

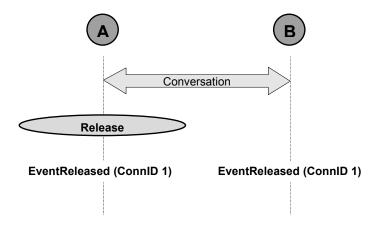


Figure 74: Release Phase

Table 145: Release Phase

PARTY A	PARTY B	
Conversation		
Release (TReleaseCall)		
EventReleased	EventReleased	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
OtherDN <b>B</b> *OPT	OtherDN <b>A</b> *OPT	
CallState <b>OK</b>	CallState <b>OK</b>	

#### **Release from Conference Phase**

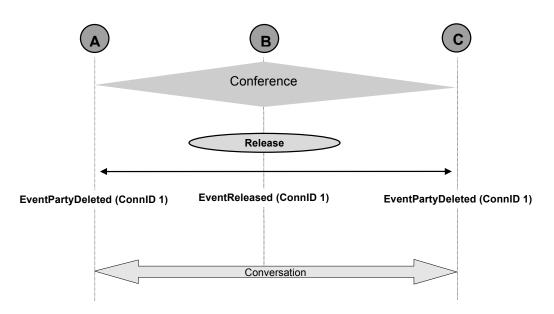


Figure 75: Release from Conference Phase

**Table 146: Release from Conference Phase** 

PARTY A	PARTY B	PARTY C
Conference		

**Table 146: Release from Conference Phase (Continued)** 

PARTY A	PARTY B	PARTY C
	Release (TReleaseCall)	
EventPartyDeleted	EventReleased	EventPartyDeleted
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThisDN C
OtherDN <b>B</b>	CallState <b>OK</b>	OtherDN <b>B</b>
OtherDNRole <b>DeletedParty</b>		OtherDNRole <b>DeletedParty</b>
ThirdPartyDN <b>B</b>		ThirdPartyDN <b>B</b>
ThirdPartyDNRole <b>DeletedBy</b>		ThirdPartyDNRole <b>DeletedBy</b>
CallState OK/Conferenced <sup>a</sup>		CallState <b>OK/Conferenced</b> <sup>a</sup>
Conversation		

a. If more than two parties remain in the conference call, CallState has a value of Conferenced; otherwise, CallState has a value of OK.

#### **Delete from Conference Phase**

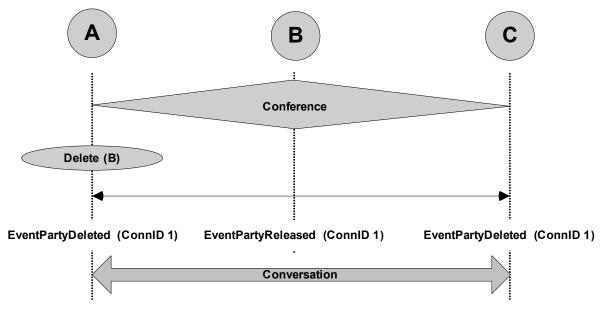


Figure 76: Delete from Conference Phase

**Table 147: Delete from Conference Phase** 

PARTY A	PARTY B	PARTY C	
Conference			
Delete B (TDeleteFromConference)			
EventPartyDeleted	EventReleased	EventPartyDeleted	
ConnID 1	ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	ThisDN C	
OtherDN <b>B</b>	CallState <b>OK</b>	OtherDN B	
OtherDNRole <b>DeletedParty</b>		OtherDNRole <b>DeletedParty</b>	
ThirdPartyDN <b>A</b>		ThirdPartyDN A	
ThirdPartyDNRole <b>DeletedBy</b>		ThirdPartyDNRole <b>DeletedBy</b>	
CallState <b>OK/Conferenced</b> <sup>a</sup>		CallState <b>OK/Conferenced</b> <sup>a</sup>	
Conversation			

a. If more than two parties remain in the conference call, CallState has a value of Conferenced; otherwise, CallState has a value of OK.

# **Holding, Transferring, and Conferencing**

The call models here show the functions and events related to placing calls on hold, transferring calls, and creating conference calls.

#### **Hold/Retrieve Function, Consulted Party Answers**

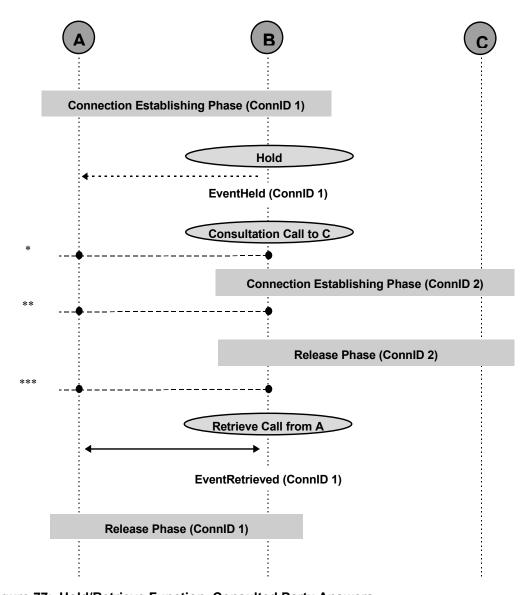


Figure 77: Hold/Retrieve Function, Consulted Party Answers

**Table 148: Hold/Retrieve Function, Consulted Party Answers** 

PARTY A	PARTY B	PARTY C	
Call-Establishing Phase (ConnID 1)			
	Hold (THoldCall)		

Genesys S

**Table 148: Hold/Retrieve Function, Consulted Party Answers (Continued)** 

PARTY A	PARTY B	PARTY C		
	EventHeld ConnID 1			
	ThisDN <b>B</b>			
	OtherDN A			
	Make Call to C (Consultation) (TMakeCall)			
Ca	Call-Establishing Phase (ConnID 2)			
	Release Phase (ConnID 2)			
	Retrieve Call from A (TRetrieveCall)			
	<b>EventRetrieved</b> <sup>a</sup>			
	ConnID 1			
	ThisDN <b>B</b>			
	OtherDN A			
	CallState <b>OK</b>			
Release Phase (ConnID 1)				

a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

**Table 149: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B
*	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>
**	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>
***	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>

#### Hold/Retrieve Function, Consulted Party Does Not Answer

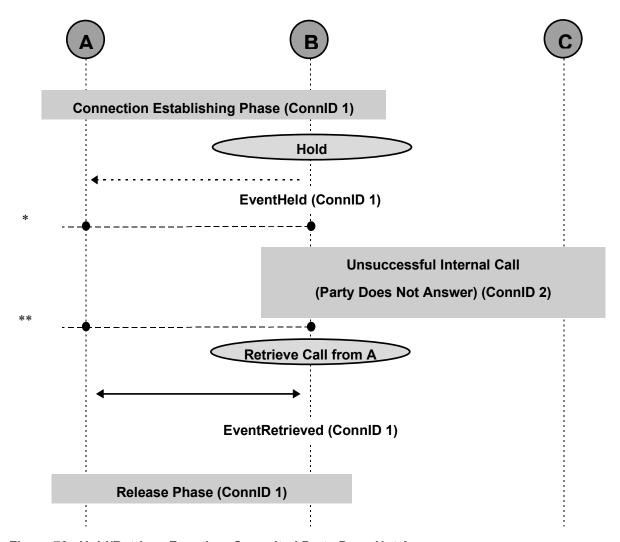


Figure 78: Hold/Retrieve Function, Consulted Party Does Not Answer

Table 150: Hold/Retrieve Function, Consulted Party Does Not Answer

PARTY A	PARTY B	PARTY C	
Call-Establishing Phase (ConnID 1)			

Table 150: Hold/Retrieve Function, Consulted Party Does Not Answer (Continued)

PARTY A	PARTY B	PARTY C		
	Hold (THoldCall)			
	EventHeld			
	ConnID 1			
	ThisDN B			
	OtherDN A			
Unsuccessful Internal Call (Party Does Not Answer) (ConnID 2)				
Retrieve Call from A (TRetrieveCall)				
	EventRetrieved <sup>a</sup>			
	ConnID 1			
	ThisDN B			
	OtherDN A			
	CallState <b>OK</b>			
Release Phase (ConnID 1)				

a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

Genesys S

**Table 151: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B
*	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>
**	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>
İ		

#### **Single-Step Transfer**

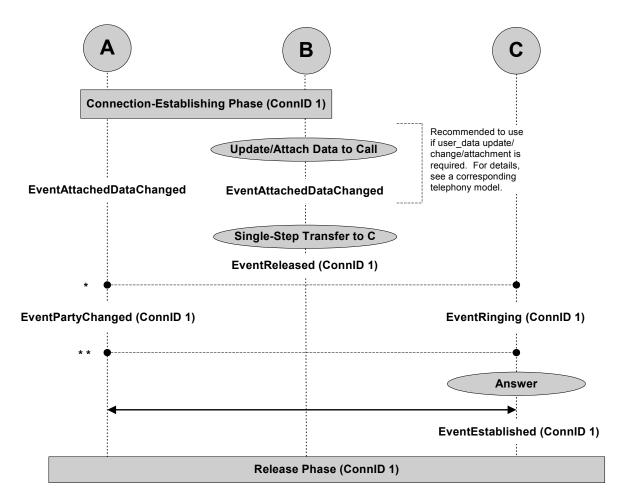


Figure 79: Single-Step Transfer

**Table 152: Single-Step Transfer** 

PARTY A	PARTY B	PARTY C	
Call-Establishing Phase (ConnID 1)			
	Single-Step Transfer to C (TSingleStepTransfer)		

Genesys S

Table 152: Single-Step Transfer (Continued)

PARTY A	PARTY B	PARTY C
	EventReleased	
	ConnID 1	
	ThisDN <b>B</b>	
	ThirdPartyDN C	
	OtherDN A	
<b>EventPartyChanged</b>	CallState Transferred	EventRinging
ConnID 1	Cause 1stepTransfer	ConnID 1
PreviousConnID 1		ThisDN C
ThisDN A		OtherDN A
OtherDN C		ThirdPartyDN <b>B</b>
ThirdPartyDN <b>B</b>		ThirdPartyDNRole
ThirdPartyDNRole		TransferredBy
TransferredBy		CallState <b>Transferred</b>
CallState Transferred		
		Answer (TAnswerCall)
		EventEstablished
		ConnID 1
		ThisDN C
		OtherDN A

**Table 153: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		
**	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

#### **Single-Step Transfer (Outbound)**

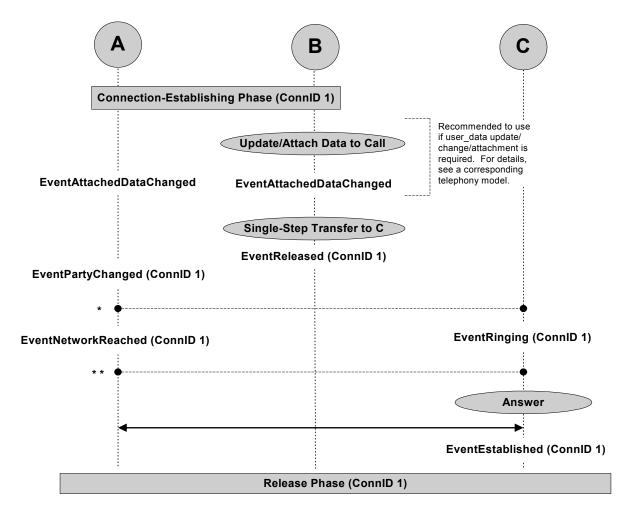


Figure 80: Single-Step Transfer (Outbound)

**Table 154: Single-Step Transfer (Outbound)** 

PARTY A	PARTY B	PARTY C	
Call-Establishing Phase (ConnID 1)			

Table 154: Single-Step Transfer (Outbound) (Continued)

PARTY A	PARTY B	PARTY C
	Single-Step Transfer to C (TSingleStepTransfer)	
EventPartyChanged	EventReleased	
ConnID 1	ConnID 1	
PreviousConnID 1	ThisDN B	
ThisDN A	ThirdPartyDN C	
OtherDN C	OtherDN A	
ThirdPartyDN B	CallState Transferred	EventRinging
ThirdPartyDNRole	Cause 1stepTransfer	ConnID 1
TransferredBy		ThisDN C
CallState Transferred		OtherDN A
		ThirdPartyDN <b>B</b>
EventNetworkReached		ThirdPartyDNRole
ConnID 1		TransferredBy
ThisDN A		CallState Transferred
OtherDN $\mathbf{C}^{*DIAL}$		
OtherDNRole <b>Destination</b> *DIAI		
		Answer (TAnswerCall)
		EventEstablished
		ConnID 1
		ThisDN C
		OtherDN A

Genesys 🥃

**Table 155: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		
**	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

#### **Mute Transfer**

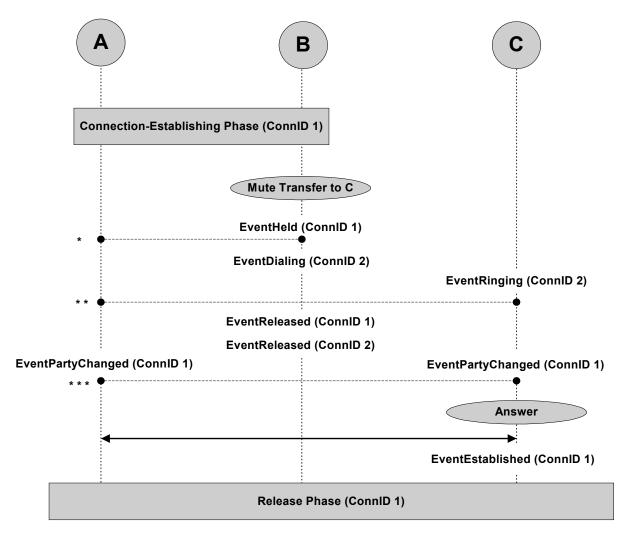


Figure 81: Mute Transfer

**Table 156: Mute Transfer** 

PARTY A	PARTY B	PARTY C
Call-Establishing Phase (ConnID 1)		

**Table 156: Mute Transfer (Continued)** 

PARTY A	PARTY B	PARTY C
	Mute Transfer to C (TMuteTransfer*)	
	EventHeld	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	EventDialing	EventRinging
	ConnID 2	ConnID 2
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole Origination	ThisDNRole <b>Destination</b>
	OtherDN C	OtherDN B
	OtherDNRole <b>Destination</b>	OtherDNRole Origination
		CallState <b>OK</b>
EventPartyChanged	EventReleased	EventPartyChanged
ConnID 1	ConnID 1	ConnID 1
PreviousConnID 1	ThisDN <b>B</b>	PreviousConnID 2
ThisDN A	OtherDN A	ThisDN C
OtherDN C	CallState Transferred	OtherDN A
ThirdPartyDN B		ThirdPartyDN B
ThirdPartyDNRole <b>TransferredBy</b>		ThirdPartyDNRole TransferredBy
CallState Transferred	EventReleased	CallState Transferred
	ConnID 2	
	ThisDN <b>B</b>	
	ThisDNRole <b>Origination</b>	
	OtherDN C	
	OtherDNRole <b>Destination</b>	
	CallState Transferred	
		Answer (TAnswerCall)

**Table 156: Mute Transfer (Continued)** 

PARTY A	PARTY B	PARTY C
		EventEstablished
		ConnID 1
		ThisDN C
		OtherDN A
Release Phase (ConnID 1)		

**Table 157: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased	EventReleased	EventAbandoned
	ConnID 1	ConnID 1	ConnID 2
	ThisDN A	ThisDN <b>B</b>	ThisDN C
	OtherDN C	OtherDN A	OtherDN <b>B</b>
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>
		EventReleased	
		ConnID 2	
		ThisDN <b>B</b>	
		OtherDN C	
		CallState <b>OK</b>	
***	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN <b>B</b>		ThisDN C
	OtherDN C		OtherDN <b>B</b>
	CallState <b>OK</b>		CallState <b>OK</b>

Genesys 🥃

## **Two-Step Transfer: Complete After Consulted Party Answers**

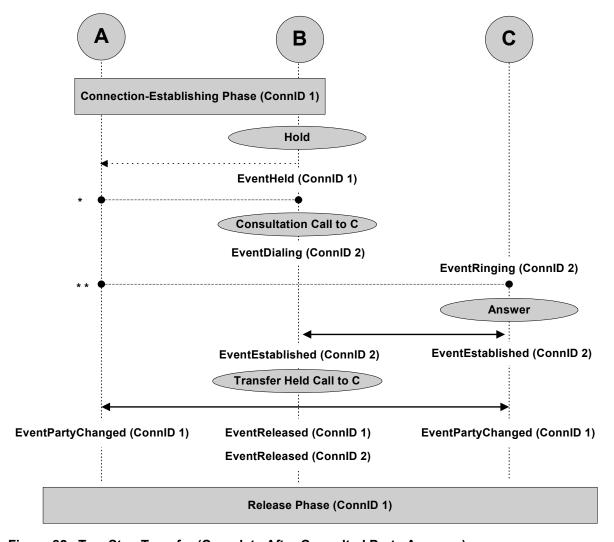


Figure 82: Two-Step Transfer (Complete After Consulted Party Answers)

**Table 158: Two-Step Transfer (Complete After Consulted Party Answers)** 

PARTY A	PARTY B	PARTY C		
Call-Establishing Phase (ConnID 1)				

Table 158: Two-Step Transfer (Complete After Consulted Party Answers) (Continued)

PARTY A	PARTY B	PARTY C		
	Hold (TInitiateTransfer*)			
	EventHeld			
	ConnID 1			
	ThisDN <b>B</b>			
	OtherDN A			
	Consultation Call to C (TInitiateTransfer Continues)			
	Call-Establishing Phase (Con	nID 2)		
	Transfer Held Call to C (TCompleteTransfer)			
EventPartyChanged	EventReleased	EventPartyChanged		
ConnID 1	ConnID 1	ConnID 1		
PreviousConnID 1	ThisDN <b>B</b>	PreviousConnID 2		
ThisDN A	OtherDN A	ThisDN C		
OtherDN C	CallState Transferred	OtherDN A		
ThirdPartyDN <b>B</b>		ThirdPartyDN <b>B</b>		
ThirdPartyDNRole TransferredBy		ThirdPartyDNRole TransferredBy		
CallState Transferred		CallState Transferred		
Canstate Transferreu	EventReleased	Canstate Transferred		
	ConnID 2			
	ThisDN <b>B</b>			
	OtherDN C			
	CallState Transferred			
Release Phase (ConnID 1)				

Genesys 🥃

**Table 159: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN <b>A</b>	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased	EventReleased	EventAbandoned
	ConnID 1	ConnID 1	ConnID 2
	ThisDN <b>A</b>	ThisDN <b>B</b>	ThisDN C
	OtherDN <b>B</b>	OtherDN A	OtherDN B
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>
		EventReleased	
		ConnID 2	
		ThisDN <b>B</b>	
		OtherDN C	
		CallState <b>OK</b>	

# Two-Step Transfer: Complete Before Consulted Party Answers (Blind)

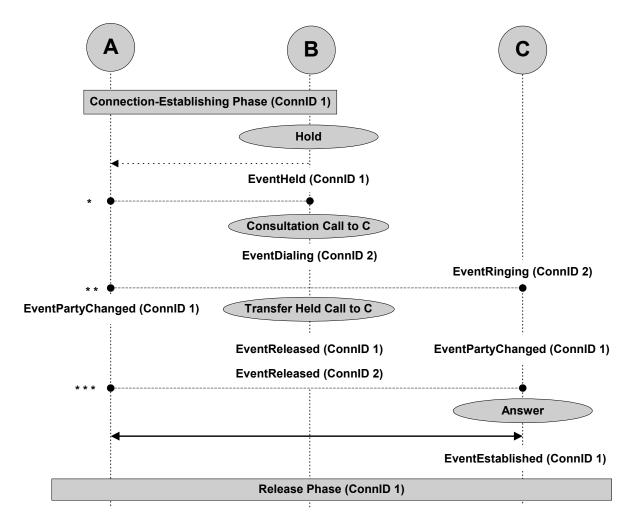


Figure 83: Blind Transfer (Two-Step Transfer, Complete Before Consulted Party Answers)

Table 160: Blind Transfer (Two-Step Transfer, Complete Before Consulted Party Answers)

PARTY A	PARTY B	PARTY C		
Call-Establishing Phase (ConnID 1)				
Hold (TInitiateTransfer)				

Table 160: Blind Transfer (Two-Step Transfer, Complete Before Consulted Party Answers) (Continued)

PARTY A	PARTY B	PARTY C
	EventHeld	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	Consultation Call to C (TInitiateTransfer Continues)	
	EventDialing	EventRinging
	ConnID 2	ConnID 2
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>
	OtherDN C *DIAL	OtherDN B
	OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination
		CallState <b>OK</b>
	Transfer Held Call to C (TCompleteTransfer)	
EventPartyChanged	EventReleased	EventPartyChanged
ConnID 1	ConnID 1	ConnID 1
PreviousConnID 1	ThisDN <b>B</b>	PreviousConnID 2
ThisDN A	OtherDN A	ThisDN C
OtherDN C	CallState Transferred	OtherDN A
ThirdPartyDN <b>B</b>		ThirdPartyDN <b>B</b>
ThirdPartyDNRole		ThirdPartyDNRole
TransferredBy		TransferredBy
CallState Transferred		CallState Transferred
	EventReleased	
	ConnID 2	
	ThisDN <b>B</b>	
	OtherDN C	
	CallState Transferred	
		Answer (TAnswerCall)

Table 160: Blind Transfer (Two-Step Transfer, Complete Before Consulted Party Answers) (Continued)

PARTY A	PARTY B	PARTY C
		EventEstablished
		ConnID 1
		ThisDN C
		OtherDN A
Release Phase (ConnID 1)		

**Note:** If a call appears on the terminating party after transfer completion, the ConnID field of EventRinging is equal to the connection ID of the original call (ConnID 1), and EventPartyChanged is not generated.

**Table 161: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	

**Table 161: Abnormal Call Flow (Continued)** 

Interruption Point	PARTY A	PARTY B	PARTY C
**	EventReleased	EventReleased	EventAbandoned
	ConnID 1	ConnID 1	ConnID 2
	ThisDN A	ThisDN <b>B</b>	ThisDN C
	OtherDN <b>B</b>	OtherDN A	OtherDN <b>B</b>
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>
		EventReleased	
		ConnID 2	
		ThisDN <b>B</b>	
		OtherDN C	
		CallState <b>OK</b>	
***	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

### **Two-Step Transfer: to ACD**

**Note:** Two-step transfer to ACD means that a call is waiting in a queue, and the transfer completed before any ACD agent is available to receive the call.

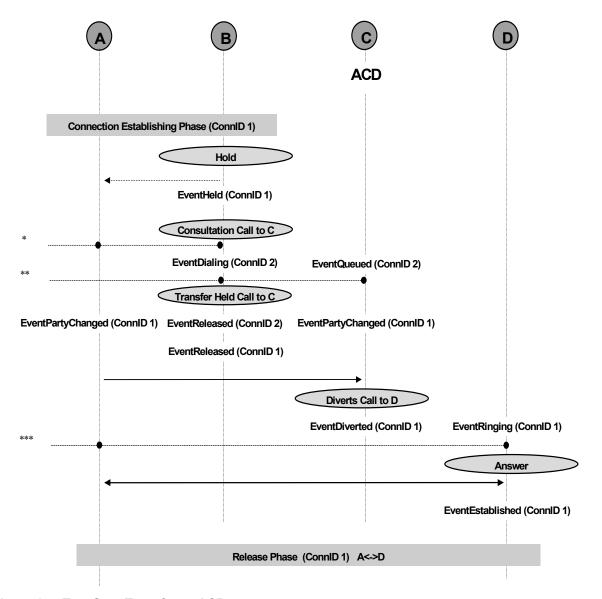


Figure 84: Two-Step Transfer to ACD

Table 162: Two-Step Transfer to ACD

PARTY A	PARTY B	PARTY C (ACD)	PARTY D	
Call-Establishing Phase (ConnID 1)				

Table 162: Two-Step Transfer to ACD (Continued)

PARTY A	PARTY B	PARTY C (ACD)	PARTY D
	Hold (TInitiateTransfer)		
	EventHeld		
	ConnID 1		
	ThisDN <b>B</b>		
	OtherDN <b>A</b>		
	Consultation Call to C (TInitiateTransfer Continues)		
	EventDialing	EventQueued	
	ConnID 2	ConnID 2	
	ThisDN <b>B</b>	ThisDN C	
	OtherDN C *DIAL	ThisQueue C	
		OtherDN <b>B</b>	
	Transfer Held Call to C (TCompleteTransfer)		
<b>EventPartyChanged</b>	EventReleased	EventPartyChanged	
ConnID 1	ConnID 2	ConnID 1	
PreviousConnID 1	ThisDN <b>B</b>	PreviousConnID 2	
ThisDN A	ThisDNRole <b>Origination</b>	ThisDN C	
OtherDN C	OtherDN C	ThisQueue C	
ThirdPartyDN <b>B</b>	OtherDNRole <b>Destination</b>	OtherDN A	
ThirdPartyDNRole	CallState Transferred	ThirdPartyDN <b>B</b>	
TransferredBy		ThirdPartyDNRole	
CallState Transferred		TransferredBy	
		CallState Transferred	
	EventReleased		
	ConnID 1		
	ThisDN <b>B</b>		
	OtherDN A		
	CallState Transferred		
		Diverts Call to D	

**Table 162: Two-Step Transfer to ACD (Continued)** 

PARTY A	PARTY B	PARTY C (ACD)	PARTY D	
		EventDiverted	EventRinging	
		ConnID 1	ConnID 1	
		ThisDN C	ThisDN <b>D</b>	
		OtherDN A	ThisQueue C	
		ThirdPartyDN C *OPT	OtherDN A	
		ThirdPartyDNRole <b>Destination</b> *OPT	CallState <b>OK</b>	
			Answer (TAnswerCall)	
			EventEstablished	
			ConnID 1	
			ThisDN <b>D</b>	
			ThisQueue C	
			OtherDN A	
			CallState <b>OK</b>	
Release Phase (ConnID 1)				

**Note:** If a call transfer is completed before it is put in an ACD queue, an EventPartyChanged is not generated.

**Table 163: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
*	EventReleased	EventReleased		
	ConnID 1	ConnID 1		
	ThisDN A	ThisDN <b>B</b>		
	OtherDN <b>B</b>	OtherDN A		
	CallState <b>OK</b>	CallState <b>OK</b>		
**	EventReleased	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	ConnID 2	
	ThisDN A	ThisDN <b>B</b>	ThisDN C	
	OtherDN <b>B</b>	OtherDN A	OtherDN <b>B</b>	
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>	
		EventReleased		
		ConnID 2		
		ThisDN B		
		OtherDN C		
		CallState <b>OK</b>		
***	EventReleased			EventAbandoned
	ConnID 1			ConnID 1
	ThisDN A			ThisDN <b>D</b>
	OtherDN <b>D</b>			OtherDN A
	CallState <b>OK</b>			CallState <b>OK</b>

### Two-Step Transfer: to a Routing Point

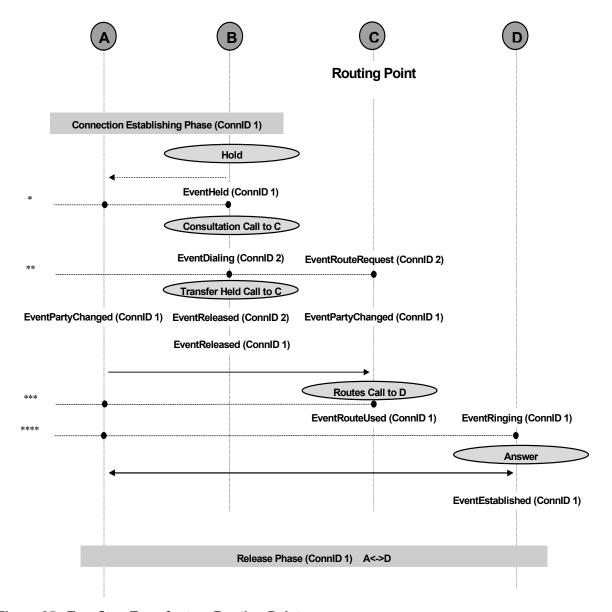


Figure 85: Two-Step Transfer to a Routing Point

Table 164: Two-Step Transfer to a Routing Point

PARTY A	PARTY B	PARTY C (ACD)	PARTY D			
Call-Establishing Phase (ConnID 1)						

Genesys S

Table 164: Two-Step Transfer to a Routing Point (Continued)

PARTY A	PARTY B	PARTY C (ACD)	PARTY D
	Hold (TInitiateTransfer)		
	EventHeld ConnID 1 ThisDN B OtherDN A		
	Consultation Call to C (TInitiateTransfer Continues)		
	EventDialing	EventRouteRequest	
	ConnID 2	ConnID 2	
	ThisDN <b>B</b>	ThisDN C	
	ThisDNRole Origination	ThisDNRole <b>Destination</b>	
	OtherDN C *DIAL	OtherDN B	
	OtherDNRole <b>Destination</b>	OtherDNRole Origination	
	CallType Consult		
	Transfer Held Call to C (TComplete-Transfer)		

Table 164: Two-Step Transfer to a Routing Point (Continued)

PARTY A	PARTY B	PARTY C (ACD)	PARTY D
<b>EventPartyChanged</b>	EventReleased	EventPartyChanged	
ConnID 1	ConnID 2	ConnID 1	
PreviousConnID 1	ThisDN <b>B</b>	PreviousConnID 2	
ThisDN A	ThisDNRole	ThisDN C	
ThisDNRole	Origination	OtherDN A	
Origination <sup>a</sup>	OtherDN C	ThirdPartyDN <b>B</b>	
OtherDN C	OtherDNRole <b>Destination</b>	ThirdPartyDNRole	
ThirdPartyDN <b>B</b>	CallState Transferred	TransferredBy	
ThirdPartyDNRole TransferredBy	Canstate Transferred	CallState Transferred	
CallState Transferred	EventReleased		
	ConnID 1		
	ThisDN <b>B</b>		
	ThisDNRole <b>Destination</b>		
	OtherDN A		
	CallState Transferred		
		Diverts Call to D	
		EventRouteUsed	EventRinging
		ConnID 1	ConnID 1
		ThisDN C	ThisDN <b>D</b>
		OtherDN A	OtherDN A
		ThirdPartyDN <b>D</b> *OPT	CallState <b>OK</b>
			Answer (TAnswerCall)
			EventEstablished
			ConnID 1
			ThisDN <b>D</b>
			OtherDN A
Call-Establishing Phase (ConnID 1)			

a. ThisDNRole must be Destination if party B is the call originator.

Genesys 🥃

**Table 165: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
*	EventReleased	EventReleased		
	ConnID 1	ConnID 1		
	ThisDN A	ThisDN <b>B</b>		
	OtherDN <b>B</b>	OtherDN A		
	CallState <b>OK</b>	CallState <b>OK</b>		
**	EventReleased	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	ConnID 2	
	ThisDN A	ThisDN <b>B</b>	ThisDN C	
	OtherDN <b>B</b>	OtherDN A	OtherDN <b>B</b>	
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>	
		EventReleased		
		ConnID 2		
		ThisDN <b>B</b>		
		OtherDN C		
		CallState <b>OK</b>		
***	EventReleased		EventAbandoned	
	ConnID 1		ConnID 1	
	ThisDN A		ThisDN C	
	OtherDN C		OtherDN A	
	CallState <b>OK</b>		CallState <b>OK</b>	
****	EventReleased			EventAbandoned
	ConnID 1			ConnID 1
	ThisDN A			ThisDN <b>D</b>
	OtherDN <b>D</b>			OtherDN A
	CallState <b>OK</b>			CallState <b>OK</b>

### **Trunk Optimization: Trunk Anti-Tromboning**

Trunk optimization: trunk anti-tromboning (TAT) scenarios apply to functionality available from certain Nortel switches and are very similar to the case of "Two-Step Transfer: Complete After Consulted Party Answers" on page 277. Figure 86 identifies the call model used by T-Servers to indicate a TAT event.

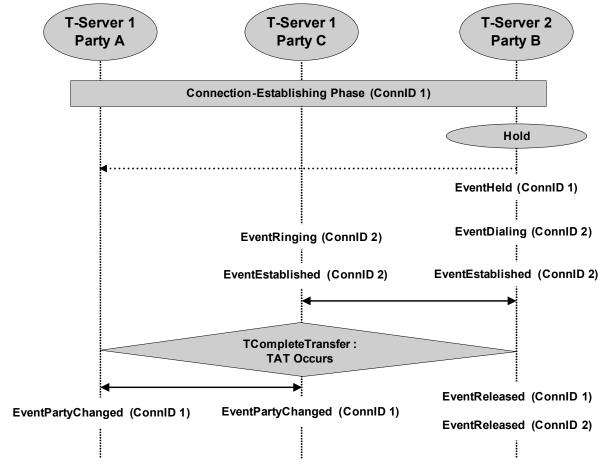


Figure 86: Trunk Optimization: Trunk Anti-Tromboning

**Table 166: Trunk Optimization: Trunk Anti-Tromboning** 


T-Server 1 PARTY A	T-Server 1 PARTY C	T-Server 2 PARTY B
Call-Establishing Phase (ConnID 1)		

Genesys S

Table 166: Trunk Optimization: Trunk Anti-Tromboning (Continued)

T-Server 1 PARTY A	T-Server 1 PARTY C	T-Server 2 PARTY B
		Hold (TInitiateTransfer to C)
		EventHeld
		ConnID 1
		ThisDN <b>B</b>
		OtherDN <b>A</b>
	EventRinging	EventDialing
	ConnID 2	ConnID 2
	ThisDN C	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN C
	EventEstablished	EventEstablished
	ConnID 2	ConnID 2
	ThisDN C	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN C
		TCompleteTransfer
	Trunk Optimization Occurs	
EventPartyChanged	EventPartyChanged	EventReleased
ConnID 1	ConnID 1	ConnID 1
ThisDN A	PreviousConnID 2	ThisDN <b>B</b>
OtherDN C	ThisDN C	OtherDN A
ThirdPartyDN <b>B</b>	OtherDN A	CallState Transferred
CallState RemoteRelease	ThirdPartyDN <b>B</b>	
	CallState RemoteRelease	EventReleased
		ConnID 2
		ThisDN <b>B</b>
		OtherDN C
		CallState Transferred

## **Single-Step Conference**

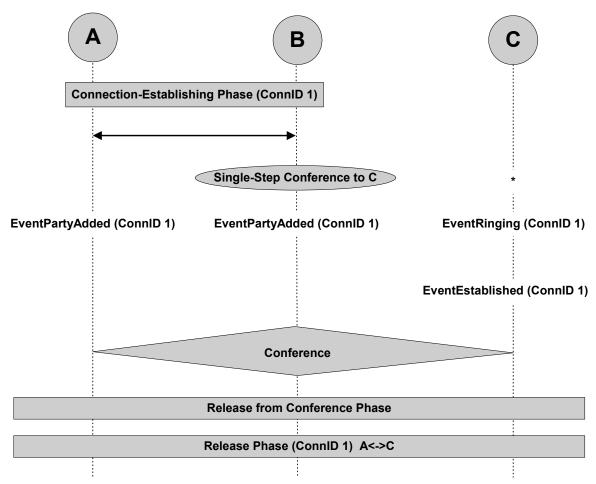

<sup>\*</sup> Party C may issue SingleStepConference as well as Party B; in both cases the event flow is the same.

Figure 87: Single-Step Conference

**Table 167: Single-Step Conference** 

PARTY A	PARTY B	PARTY C		
Call-Establishing Phase (ConnID 1)				

**Table 167: Single-Step Conference (Continued)** 

PARTY A	PARTY B	PARTY C
	TSingleStepConference	
EventPartyAdded	EventPartyAdded	EventRinging
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThisDN C
OtherDN C	OtherDN C	ThisDNRole
ThirdPartyDN <b>B</b> <sup>a</sup>	ThirdPartyDN <b>B</b> <sup>a</sup>	ConferenceMember
		CallState <b>OK</b>
		EventEstablished
		ConnID 1
		ThisDN C
		ThisDNRole
		ConferenceMember
		CallState Conferenced
Release from Conference Phase		
Release Phase (ConnID 1)		

a. ThirdPartyDN has a value of  ${\tt C}$  if Party  ${\tt C}$  initiates the request for a conference.

#### Conference

**Note:** This call model applies to two types of conferences: Two-Step Conference and Conference with Calls Merge.

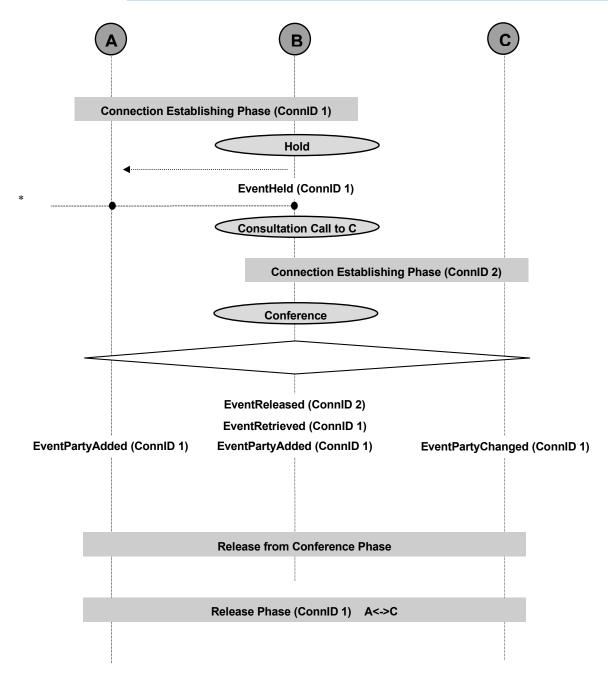


Figure 88: Conference

Table 168: Conference

PARTY A	PARTY B	PARTY C	
Ca	all-Establishing Phase (ConnID	0 1)	
	Hold (See Table 170.)		
	EventHeld		
	ConnID 1		
	ThisDN <b>B</b>		
	ThisDNRole Previous Role of DN		
	OtherDN A		
	OtherDNRole Previous Role of DN		
	Consultation Call to C (See Table 170.)		
Call-Establishing Phase (ConnID 2)			

**Table 168: Conference (Continued)** 

PARTY A	PARTY B	PARTY C	
	Conference (See Table 170.)		
	EventReleased		
	ConnID 2		
	ThisDN <b>B</b>		
	OtherDN C		
	CallState Conferenced		
	EventRetrieved <sup>a</sup>		
	ConnID 1		
	ThisDN <b>B</b>		
	OtherDN A		
	CallState Conferenced		
<b>EventPartyAdded</b>	<b>EventPartyAdded</b>	<b>EventPartyChanged</b>	
ConnID 1	ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	PreviousConnID 2	
OtherDN C	OtherDN <sup>b</sup> C	ThisDN C	
ThirdPartyDN <b>B</b>	OtherDNRole NewParty	ThirdPartyDN <b>B</b>	
ThirdPartyDNRole <b>AddedBy</b>	ThirdPartyDN B	ThirdPartyDNRole	
CallState Conferenced	ThirdPartyDNRole <b>AddedBy</b>	ConferencedBy	
	CallState Conferenced	CallState Conferenced	
Release from Conference Phase			
Release Phase (ConnID 1)			

- a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.
- b. If only one party is added (as in the case of a simple conference call), the corresponding telephony object is specified in OtherDN. If more than one party is added, then the corresponding telephony objects are specified in Extensions.

Genesys 🥃

**Table 169: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B
*	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>
	OtherDN <b>B</b>	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>

**Table 170: Application Activities for Different Types of Conference** 

Call Phase	Two-Step Conference	Conference with Calls Merge
HOLD	TInitiateConference	THoldCall
CONSULTATION CALL		TMakeCall
CONFERENCE	TCompleteConference	TMergeCalls

# Blind Conference (Complete Before Consulted Party Answers)

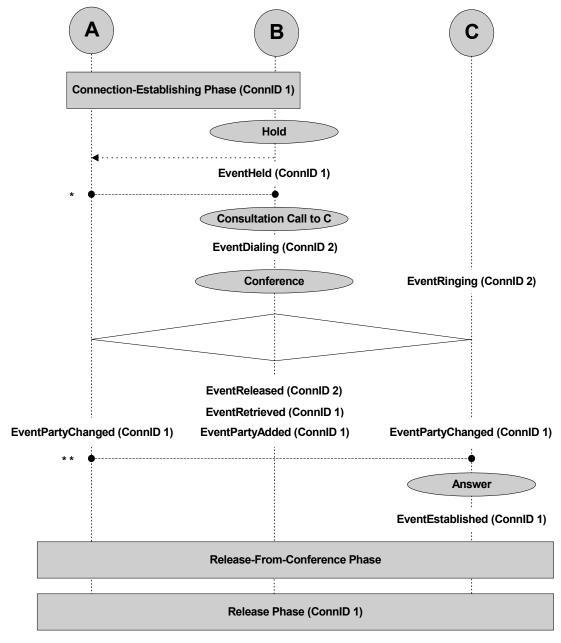


Figure 89: Blind Conference (Complete Before Consulted Party Answers)

**Table 171: Blind Conference (Complete Before Consulted Party Answers)** 

PARTY A	PARTY B	PARTY C
Ca	all-Establishing Phase (ConnID	) 1)
	Hold (See Table 170 on page 299.)	
	EventHeld	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	Consultation Call to C (See Table 170 on page 299.)	
	EventDialing	EventRinging
	ConnID 2	ConnID 2
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>
	OtherDN C *DIAL	OtherDN B
	OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination
	CallType Consult	CallType Consult

Table 171: Blind Conference (Complete Before Consulted Party Answers) (Continued)

PARTY A	PARTY B	PARTY C
	Conference (See Table 170 on page 299.)	
	EventReleased	
	ConnID 2	
	ThisDN <b>B</b>	
	OtherDN C	
	CallState Conferenced	
	<b>EventRetrieved</b> <sup>a</sup>	
	ConnID 1	
	ThisDN B	
	OtherDN A	
	CallState Conferenced	
EventPartyAdded	<b>EventPartyAdded</b>	EventPartyChanged
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	PreviousConnID 2
OtherDN C	OtherDN C	ThisDN C
ThirdPartyDN B	ThirdPartyDN B	ThirdPartyDN B
ThirdPartyDNRole AddedBy	ThirdPartyDNRole <b>AddedBy</b>	ThirdPartyDNRole
CallState Conferenced	CallState Conferenced	ConferencedBy
		CallState Conferenced
		Answer (TAnswerCall)
		EventEstablished
		ConnID 1
		ThisDN C
		CallState Conferenced
Release from Conference Phase		
	Release Phase (ConnID 1)	

a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

Genesys 🥃

Note: If a call appears on the terminating party after completion of conference, the ConnID field of EventRinging is equal to the connection ID of the original call (ConnID 1), and EventPartyChanged is not generated.

**Table 172: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased	EventPartyDeleted	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b> *DIAL	OtherDN A	
	CallState <b>OK</b>	OtherDNRole DeletedParty	
		ThirdPartyDN A	
		ThirdPartyDNRole <b>DeletedBy</b>	
		CallState <b>OK</b>	

## Conference with Two Incoming Calls Using TMergeCalls

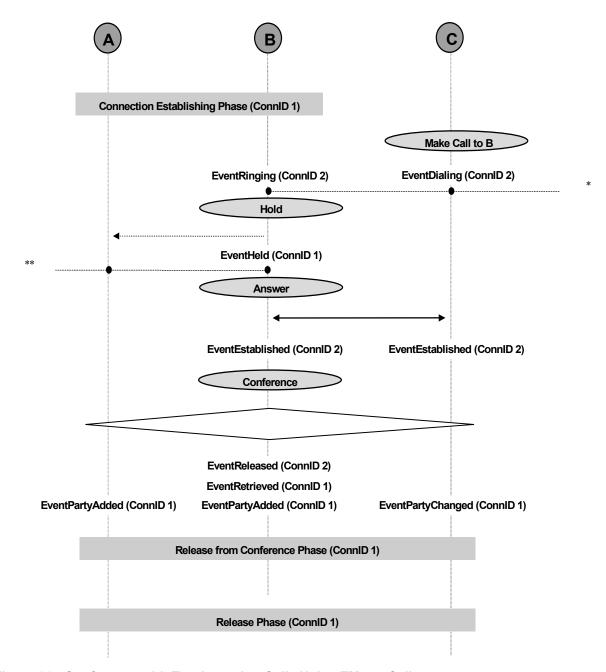


Figure 90: Conference with Two Incoming Calls Using TMergeCalls

**Table 173: Conference with Two Incoming Calls Using TMergeCalls** 

PARTY A	PARTY B	PARTY C
Ca	all-Establishing Phase (ConnID	) 1)
		Make Call to B (TMakeCall)
	EventRinging	EventDialing
	ConnID 2	ConnID 2
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole Origination
	OtherDN C	OtherDN <b>B</b> *DIAL
	OtherDNRole <b>Origination</b>	OtherDNRole <b>Destination</b>
	CallState <b>OK</b>	
	Place A on Hold (THoldCall)	
	EventHeld	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	Answer (TAnswerCall)	
	EventEstablished	EventEstablished
	ConnID 2	ConnID 2
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole Origination
	OtherDN C	OtherDN B
	OtherDNRole Origination	OtherDNRole <b>Destination</b>

**Table 173: Conference with Two Incoming Calls Using TMergeCalls (Continued)** 

PARTY A	PARTY B	PARTY C
	Conference (TMergeCalls)	
	EventReleased	
	ConnID 2	
	ThisDN B	
	ThisDNRole <b>Destination</b>	
	OtherDN C	
	OtherDNRole Origination	
	CallState Conferenced	
	EventRetrieved <sup>a</sup>	
	ConnID 1	
	ThisDN B	
	OtherDN A	
	CallState Conferenced	
EventPartyAdded		<b>EventPartyChanged</b>
ConnID 1	<b>EventPartyAdded</b>	ConnID 1
ThisDN A	ConnID 1	PreviousConnID 2
OtherDN C	ThisDN B	ThisDN C
OtherDNRole NewParty	OtherDN C	ThirdPartyDN <b>B</b>
ThirdPartyDN <b>B</b>	OtherDNRole NewParty	ThirdPartyDNRole
ThirdPartyDNRole <b>AddedBy</b>	ThirdPartyDN <b>B</b>	ConferencedBy
CallState Conferenced	ThirdPartyDNRole <b>AddedBy</b>	CallState Conferenced
	CallState Conferenced	
Release from Conference Phase		
Release Phase (ConnID 1)		

a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

Genesys S

**Table 174: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*		EventAbandoned	EventReleased
		ConnID 2	ConnID 2
		ThisDN <b>B</b>	ThisDN C
		OtherDN C	OtherDN <b>B</b>
		CallState <b>OK</b>	CallState <b>OK</b>
**	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN <b>A</b>	OtherDN A	
	OtherDN <b>B</b>	CallState <b>OK</b>	
	CallState <b>OK</b>		

# **Handling User Data**

# **Attaching/Updating User Data to Internal Call**

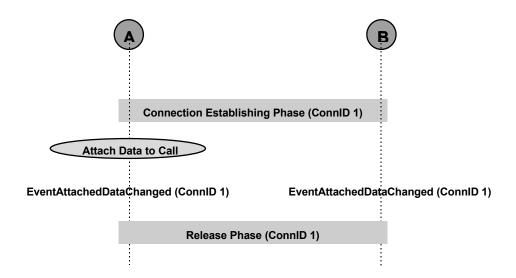


Figure 91: Attaching/Updating User Data to Internal Call

Table 175: Attaching/Updating User Data to Internal Call

PARTY A	PARTY B		
Call-Establishing	Call-Establishing Phase (ConnID 1)		
Attach User Data to a Call (TUpdateUserData)			
<b>EventAttachedDataChanged</b>	EventAttachedDataChanged		
ConnID 1	ConnID 1		
ThisDN A	ThisDN B		
ThirdPartyDN A	ThirdPartyDN A		
Release Phase (ConnID 1)			

## Attaching/Updating User Data to Call by Third Party

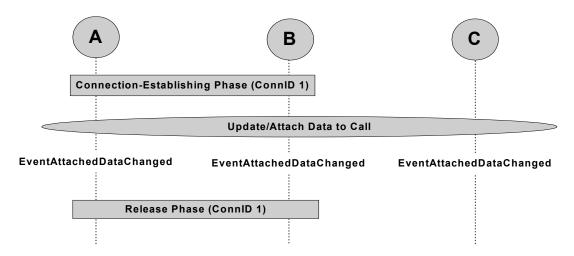


Figure 92: Attaching/Updating User Data to Call by Third Party

Table 176: Attaching/Updating User Data to Call by Third Party

PARTY A	PARTY B	PARTY C
Call-Establishing Phase (ConnID 1)		

Genesys S

Table 176: Attaching/Updating User Data to Call by Third Party (Continued)

PARTY A	PARTY B	PARTY C
		Attach User Data to a Call (TUpdateUserData)
<b>EventAttachedDataChanged</b>	<b>EventAttachedDataChanged</b>	<b>EventAttachedDataChanged</b>
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThirdPartyDN C
ThirdPartyDN C	ThirdPartyDN C	
Release Phase (ConnID 1)		

# **Special Cases**

# **Outbound Call to a Busy Destination**

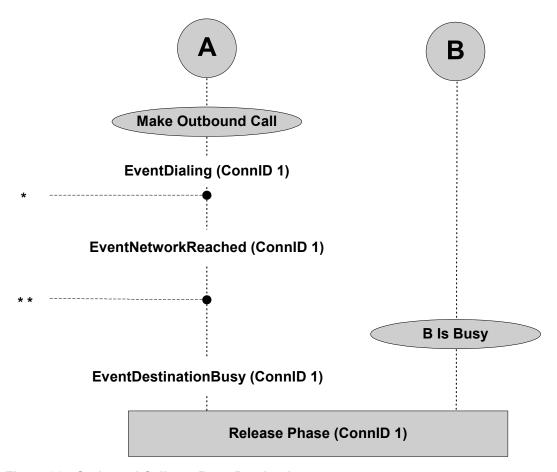


Figure 93: Outbound Call to a Busy Destination

Table 177: Outbound Call to a Busy Destination

PARTY A	PARTY B
Make Outbound Call to B (TMakeCall)	
EventDialing	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
<b>EventNetworkReached</b>	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
	B is busy
EventDestinationBusy	
ConnID 1	
ThisDN A	
ThisDNRole <b>Origination</b>	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
Release Phase (ConnID 1)	

**Table 178: Abnormal Call Flow** 

Interruption Point	PARTY A
*	EventReleased ConnID 1
	ThisDN <b>A</b> OtherDN <b>B</b> CallState <b>OK</b>
**	EventReleased ConnID 1 ThisDN A OtherDN B CallState OK

### **Rejected Call**

Call rejection can apply both to incoming and outgoing calls. However, since most call centers forbid dropping the caller (without explaining why the call cannot be answered), for the inbound version of this, rejection is primarily for re-routing calls on a network level.

Generally, the rejected call scenario works either with RouteTypeDefault and an empty destination to reject the route request (using the default route destination as configured on the switch), or RouteTypeCallDisconnect to reject the call. (RouteTypeReject has been deprecated since it is switch-specific.) Two scenarios are applicable here. Figure 94 shows this with a route point involved, and Figure 95 on page 314 shows it with a route queue.




Figure 94: Rejected Call (Route Point)

Table 179: Rejected Call (Route Point)

External Party	Route Point
Place Inbound Call to Route Point	
	EventRouteRequest
	ConnID 1
	ThisDN B
	OtherDN A
	CallState <b>OK</b>
	TRouteCall (TRouteType=TRouteCallDisconnect)
	EventRouteUsed
	ConnID 1
	ThisDN B
	OtherDN A
	CallState <b>OK</b>
	<b>Note:</b> ThirdPartyDN is not present for this event.

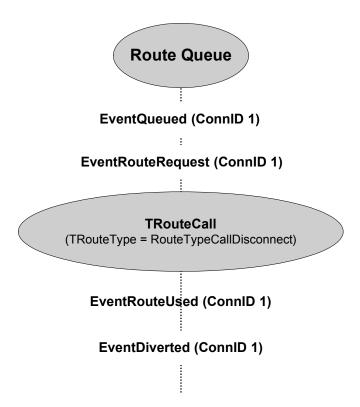


Figure 95: Rejected Call (Route Queue)

Table 180: Rejected Call (Route Queue)

External Party	Route Queue
Place Inbound Call to Route Point	
	EventQueued
	ConnID 1
	ThisDN B
	OtherDN A
	CallState <b>OK</b>
	EventRouteRequest
	ConnID 1
	ThisDN B
	OtherDN A
	CallState <b>OK</b>

Table 180: Rejected Call (Route Queue) (Continued)

External Party	Route Queue
	TRouteCall (TRouteType=TRouteCallDisconnect)
	EventRouteUsed
	ConnID 1
	ThisDN <b>B</b>
	OtherDN A
	CallState <b>OK</b>
	<b>Note:</b> ThirdPartyDN is not present for this event.
	EventDiverted
	ConnID 1
	ThisDN <b>B</b>
	OtherDN A
	CallState <b>Dropped</b>
	<b>Note:</b> ThirdPartyDN is not present for this event.

### **Internal Call to Destination with DND Activated**

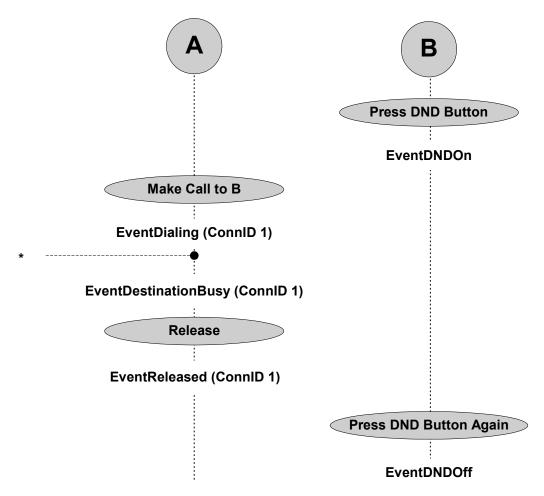


Figure 96: Internal Call to Destination with DND Activated

Table 181: Internal Call to Destination with DND Activated

PARTY A	PARTY B
	Press DND button (TSetDNDOn)
	EventDNDOn ThisDN B
Make Call to B (TMakeCall)	

Table 181: Internal Call to Destination with DND Activated (Continued)

PARTY A	PARTY B
EventDialing	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
EventDestinationBusy	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN <b>B</b> *DIAL	
OtherDNRole <b>Destination</b> *DIAL	
Release (TReleaseCall)	
EventReleased	
ConnID 1	
ThisDN A	
ThisDNRole Origination	
OtherDN B	
OtherDNRole <b>Destination</b>	
CallState <b>OK</b>	
	Press DND button again (TSetDNDOff)
	EventDNDOff
	ThisDN <b>B</b>

**Table 182: Abnormal Call Flow** 

Interruption Point	PARTY A
*	EventReleased
	ConnID 1
	ThisDN A
	OtherDN <b>B</b>
	CallState <b>OK</b>

# **Call Forwarding (on No Answer)**

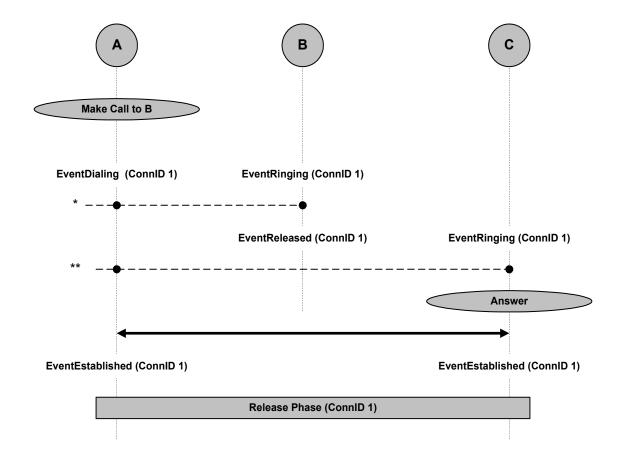


Figure 97: Call Forwarding (on No Answer)

Table 183: Call Forwarding (on No Answer)

PARTY A	PARTY B	PARTY C	
Make Call to B (TMakeCall)			
EventDialing	EventRinging		
ConnID 1	ConnID 1		
ThisDN A	ThisDN <b>B</b>		
ThisDNRole Origination	ThisDNRole <b>Destination</b>		
OtherDN <b>B</b> *DIAL	OtherDN A		
OtherDNRole <b>Destination</b>	OtherDNRole Origination		
	CallState <b>OK</b>		
	Call Forwarding (On No Answer)		
	EventReleased	EventRinging	
	ConnID 1	ConnID 1	
	ThisDN <b>B</b>	ThisDN C	
	ThirdPartyDN C	ThisDNRole <b>Destination</b>	
	ThisDNRole <b>Destination</b>	OtherDN A	
	OtherDN A	OtherDNRole <b>Origination</b>	
	OtherDNRole <b>Origination</b>	CallState Forwarded	
	CallState Forwarded		
		Answer (TAnswerCall)	
EventEstablished		EventEstablished	
ConnID 1		ConnID 1	
ThisDN A		ThisDN C	
ThisDNRole <b>Origination</b>		ThisDNRole <b>Destination</b>	
OtherDN C		OtherDN A	
OtherDNRole <b>Destination</b>		OtherDNRole Origination	
	Release Phase (ConnID 1)		

**Table 184: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN <b>A</b>		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

### **Alternate-Call Service**

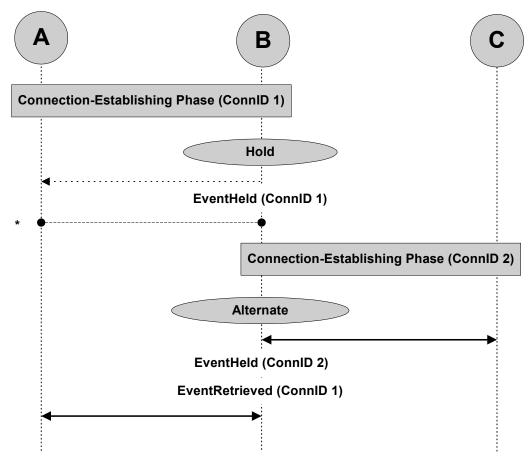


Figure 98: Alternate-Call Service

**Table 185: Alternate-Call Service** 

PARTY A	PARTY B	PARTY C	
Call-Establishing Phase (ConnID 1)			
	Hold (THoldCall)		
	EventHeld ConnID 1 ThisDN B OtherDN A		
Call-Establishing Phase (ConnID 2)			
	Alternate (TAlternateCall)		

**Table 185: Alternate-Call Service (Continued)** 

PARTY A	PARTY B	PARTY C
	EventHeld	
	ConnID 2	
	ThisDN <b>B</b>	
	OtherDN C	
	<b>EventRetrieved</b> <sup>a</sup>	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	CallState <b>OK</b>	
Conversation (ConnID 1)		

a. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

**Table 186: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	

### **Reconnect-Call Service**

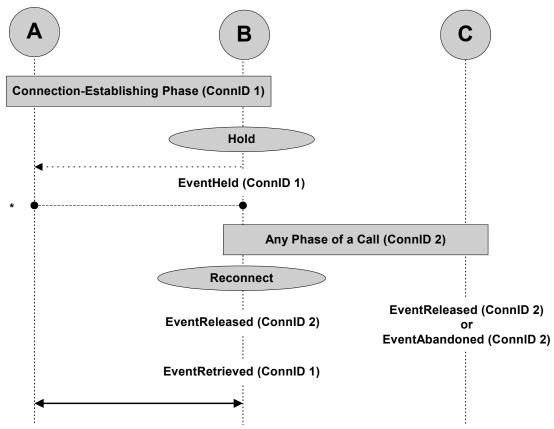


Figure 99: Reconnect-Call Service

**Table 187: Reconnect-Call Service** 

PARTY A	PARTY B	PARTY C	
	Call-Establishing Phase (ConnID 1)		
Hold (THoldCall) or Transfer (TInitiateTransfer) <sup>*</sup> / Conference (TInitiateConference) <sup>a</sup>			
	EventHeld		
	ConnID 1		
	ThisDN <b>B</b>		
	OtherDN A		
Any Phase of a Call (ConnID 2)			

**Table 187: Reconnect-Call Service (Continued)** 

PARTY A	PARTY B	PARTY C
	Reconnect (TReconnectCall)	
	EventReleased	EventReleased/EventAbandoned
	ConnID 2	ConnID 2
	ThisDN B	ThisDN C
	OtherDN C	OtherDN B
	CallState <b>OK</b>	CallState <b>OK</b>
	<b>EventRetrieved</b> <sup>b</sup>	
	ConnID 1	
	ThisDN <b>B</b>	
	OtherDN A	
	CallState <b>OK</b>	
Conversation (ConnID 1)		

- a. For the Hicom 300 E CS switch: service is available when EventHeld is generated as a result of one of these requests.
- b. With EventRetrieved, the values for attributes ThisDNRole and ThisQueue are the same as those for the attributes of the same names, if any, in the events preceding EventRetrieved (EventEstablished and EvenRinging). For non-ACD calls, however, ThisQueue is not reported.

**Table 188: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	

#### **Redirect-Call Service**

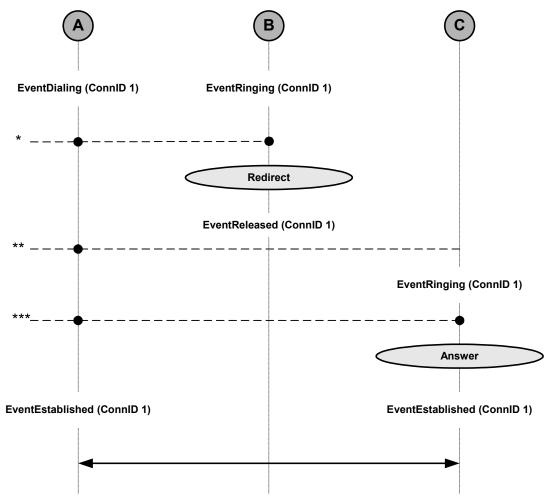


Figure 100: Redirect-Call Service

Table 189: Redirect-Call Service

PARTY A	PARTY B	PARTY C
EventDialing	EventRinging	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b> *DIAL	OtherDN A	
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole <b>Origination</b>	
	CallState <b>OK</b>	
	Redirect (TRedirectCall)	

Table 189: Redirect-Call Service (Continued)

PARTY A	PARTY B	PARTY C
	EventReleased	
	ConnID 1	
	ThisDN B	
	ThirdPartyDN C	
	OtherDN A	
	CallState Redirected	EventRinging
		ConnID 1
		ThisDN C
		ThirdPartyDN <b>B</b>
		CallState Redirected
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole <b>Origination</b>		ThisDNRole <b>Destination</b>
OtherDN C		OtherDN C
OtherDNRole <b>Destination</b>		OtherDNRole Origination
Conversation (ConnID 1)		

**Table 190: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
**	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN B		
	CallState <b>OK</b>		
***	EventReleased		EventAbandoned
	ConnID 1		ConnID 1
	ThisDN A		ThisDN C
	OtherDN C		OtherDN A
	CallState <b>OK</b>		CallState <b>OK</b>

## Internal/Inbound Call with Bridged Appearance

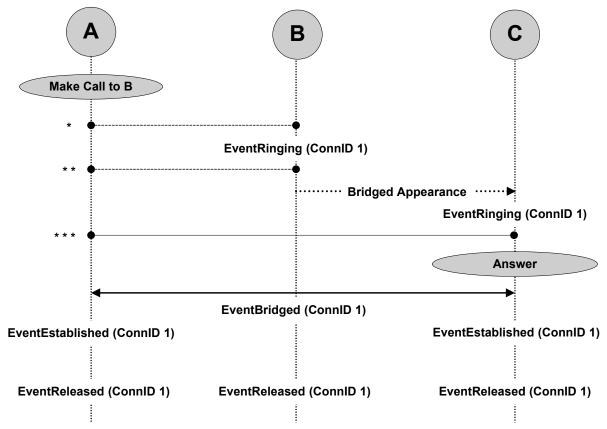


Figure 101: Internal/Inbound Call with Bridged Appearance

Table 191: Internal/Inbound Call with Bridged Appearance

PARTY A	PARTY B	PARTY C
Make Call to B (TMakeCall) or Inbound Call		
EventDialing	EventRinging	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b> *DIAL	OtherDN A	
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole Origination	
	CallState <b>OK</b>	
	Coverage Path	

Table 191: Internal/Inbound Call with Bridged Appearance (Continued)

PARTY A	PARTY B	PARTY C
		EventRinging
		ConnID 1
		ThisDN C
		ThisDNRole <b>Destination</b>
		OtherDN A
		OtherDNRole Origination
		CallState Covered
		Answer (TAnswerCall)
EventEstablished	EventBridged	EventEstablished
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThisDN C
ThisDNRole Origination	ThisDNRole <b>Destination</b>	ThisDNRole <b>Destination</b>
OtherDN C	OtherDN A	OtherDN A
OtherDNRole <b>Destination</b>	OtherDNRole Origination	OtherDNRole Origination
Release <sup>a</sup>		Release <sup>a</sup>
EventReleased	EventReleased	EventReleased
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThisDN C
OtherDN C	OtherDN A	OtherDN A
CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>

a. Either Party A or Party C can release the call.

**Table 192: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN <b>B</b>		
	CallState <b>OK</b>		
**	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
***	EventReleased	EventAbandoned	EventAbandoned
	ConnID 1	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>	ThisDN C
	OtherDN C	OtherDN A	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>

## **Outbound Call from Bridged Appearance**

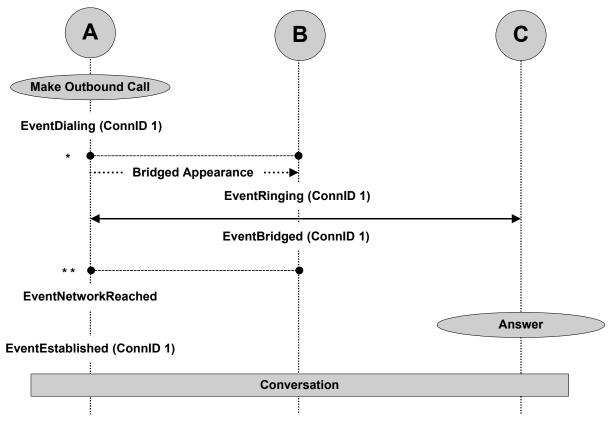


Figure 102: Outbound Call from Bridged Appearance

**Table 193: Outbound Call from Bridged Appearance** 

PARTY A	PARTY B	PARTY C
Make Outside Call (TMakeCall)		
EventDialing		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN C *DIAL		
OtherDNRole <b>Destination</b> *DIAL		

**Table 193: Outbound Call from Bridged Appearance (Continued)** 

PARTY A	PARTY B	PARTY C
	EventRinging ConnID 1 ThisDN B ThisDNRole Origination OtherDN C *DIAL OtherDNRole Destination *DIAL CallState Covered	
	EventBridged ConnID 1 ThisDN B ThisDNRole Origination OtherDN C *OPT OtherDNRole Destination	
EventNetworkReached ConnID 1 ThisDN A ThisDNRole Origination OtherDN C *DIAL OtherDNRole Destination *DIAL		
		Answer
EventEstablished ConnID 1 ThisDN A ThisDNRole Origination OtherDN C *OPT OtherDNRole Destination *OPT		

**Table 194: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		
**	EventReleased	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN C	OtherDN C	
	CallState <b>OK</b>	CallState <b>OK</b>	

## **Hold/Retrieve for Bridged Appearance**

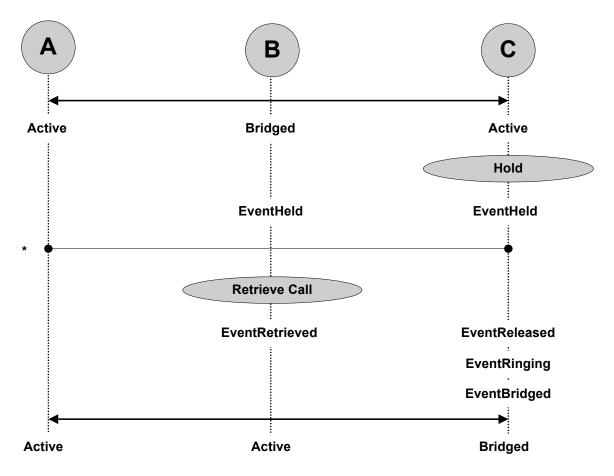


Figure 103: Hold/Retrieve for Bridged Appearance

Table 195: Hold/Retrieve for Bridged Appearance

PARTY A	PARTY B	PARTY C
Call Established between Party A and Party C, with Party B Bridged		
		Hold (THoldCall)
	EventHeld	EventHeld
	ConnID 1	ConnID 1
	ThisDN B	ThisDN C
	OtherDN A	OtherDN A

Table 195: Hold/Retrieve for Bridged Appearance (Continued)

PARTY A	PARTY B	PARTY C
	Retrieve Call (TRetrieveCall)	
	EventRetrieved	EventReleased
	ConnID 1	ConnID 1
	ThisDN <b>B</b>	ThisDN C
	OtherDN A	OtherDN A
	CallState <b>OK</b>	CallState <b>Bridged</b>
		EventRinging
		ConnID 1
		ThisDN C
		OtherDN A
		CallState Covered
		EventBridged
		ConnID 1
		ThisDN C
		OtherDN A

**Table 196: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventReleased	EventReleased
	ConnID 1	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>	ThisDN C
	OtherDN <b>B</b> or <b>C</b>	OtherDN A	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>

# Internal/Inbound Call Answerable by Several Agents (Party B Answers)<sup>1</sup>

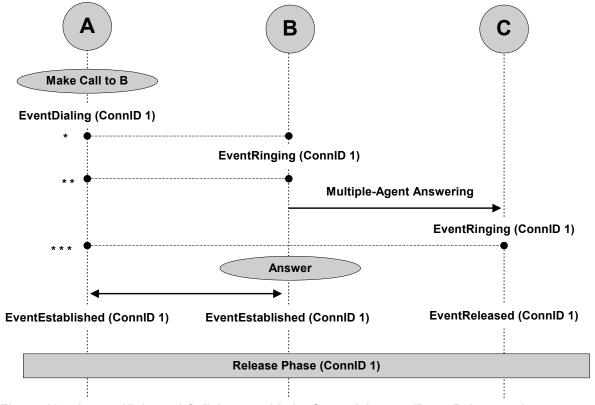


Figure 104: Internal/Inbound Call Answerable by Several Agents (Party B Answers)

Genesys S

336

<sup>1.</sup>Depending on the maker of the switch, the ability of multiple agents to handle a call may be known by names such as Coverage Path or Pickup Group.

Table 197: Internal/Inbound Call Answerable by Several Agents (Party B Answers)

PARTY A	PARTY B	PARTY C
Make Call to B (TMakeCall) or Inbound Call		
EventDialing	EventRinging	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisDNRole <b>Destination</b>	
OtherDN <b>B</b> *DIAL	OtherDN <b>A</b>	
OtherDNRole <b>Destination</b> *DIAL	OtherDNRole <b>Origination</b>	
	CallState <b>OK</b>	
	Coverage Path	
		EventRinging
		ConnID 1
		ThisDN C
		ThisDNRole <b>Destination</b>
		OtherDN <b>A</b>
		OtherDNRole <b>Origination</b>
		CallState Covered
	Answer (TAnswerCall)	
EventEstablished	EventEstablished	EventReleased
ConnID 1	ConnID 1	ConnID 1
ThisDN A	ThisDN <b>B</b>	ThisDN C
ThisDNRole <b>Origination</b>	ThisDNRole <b>Destination</b>	ThisDNRole <b>Destination</b>
OtherDN <b>B</b>	OtherDN A	OtherDN A
OtherDNRole <b>Destination</b>	OtherDNRole Origination	OtherDNRole Origination

**Table 198: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased		
	ConnID 1		
	ThisDN A		
	OtherDN <b>B</b>		
	CallState <b>OK</b>		
**	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN C	OtherDN A	
	CallState <b>OK</b>	CallState <b>OK</b>	
***	EventReleased	EventAbandoned	EventAbandoned
	ConnID 1	ConnID 1	ConnID 1
	ThisDN A	ThisDN <b>B</b>	ThisDN C
	OtherDN C	OtherDN A	OtherDN A
	CallState <b>OK</b>	CallState <b>OK</b>	CallState <b>OK</b>

## **Call Treatment with Routing**

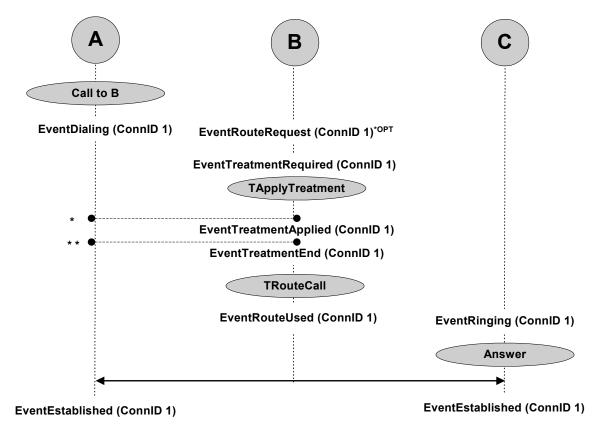


Figure 105: Call Treatment with Routing

Table 199: Call Treatment with Routing

PARTY A	PARTY B (Routing Point)	PARTY C
Call to B		
EventDialing	EventRouteRequest*OPT	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole Origination	ThisDNRole <b>Destination</b>	
OtherDN B	OtherDN A	
OtherDNRole <b>Destination</b>	OtherDNRole Origination	
CallState <b>OK</b>		
	EventTreatmentRequired	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole Origination	
	Treatment Instruction (TApplyTreatment)	
	<b>EventTreatmentApplied</b>	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	TreatmentType	
	EventTreatmentEnd	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	TreatmentType	
	UserData	

Table 199: Call Treatment with Routing (Continued)

PARTY A	PARTY B (Routing Point)	PARTY C
	Route (TRouteCall)	
	EventRouteUsed	EventRinging
	ConnID 1	ConnID 1
	ThisDN B	ThisDN C
	ThisQueue <b>B</b>	ThisDNRole <b>Destination</b>
	ThisDNRole <b>Destination</b>	OtherDN A
	OtherDN A	OtherDNRole Origination
	OtherDNRole Origination	CallState <b>OK</b>
	ThirdPartyDN C *OPT	
	ThirdPartyDNRole <b>Destination</b> *OPT	
	<b>Destination</b> Of 1	
		Answer (TAnswerCall)
EventEstablished		EventEstablished
ConnID 1		ConnID 1
ThisDN A		ThisDN C
ThisDNRole <b>Destination</b>		ThisDNRole <b>Destination</b>
OtherDN C		OtherDN A
OtherDNRole Origination		OtherDNRole Origination
CallState <b>OK</b>		CallState <b>OK</b>

Table 200: Abnormal Call Flow

Interruption Point	PARTY A	PARTY B	PARTY C
*	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN <b>B</b>	ThisQueue <b>B</b>	
	CallState <b>OK</b>	ThisDNRole <b>Destination</b>	
		OtherDN A	
		OtherDNRole Origination	
* *	EventReleased	EventAbandoned	
	ConnID 1	ConnID 1	
	ThisDN A	ThisDN <b>B</b>	
	OtherDN B	ThisQueue <b>B</b>	
	CallState <b>OK</b>	ThisDNRole <b>Destination</b>	
		OtherDN A	
		OtherDNRole Origination	
			1

## **Predictive Dialing**

#### **Predictive Call**

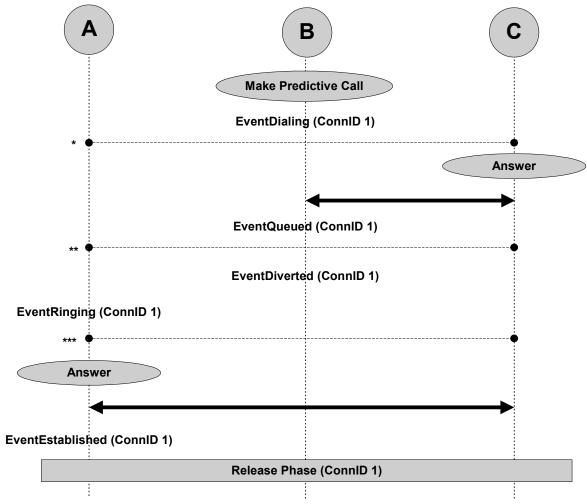


Figure 106: Predictive Call

**Table 201: Predictive Call** 

PARTY A	PARTY B (ACD Group)	PARTY C
	Make Predictive Call (TMakePredictiveCall)	
	EventDialing	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Origination</b>	
	OtherDN C *DIAL	
	OtherDNRole <b>Destination</b>	
		Answer
	EventQueued	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Origination</b>	
	CallState <b>OK</b> /	
	AnsweringMachineDetected <sup>a</sup>	
	EventDiverted	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole Origination	
	OtherDN C	
	OtherDNRole <b>Destination</b>	
	ThirdPartyDN A *OPT	
	ThirdPartyDNRole <b>Origination</b> *OPT	

**Table 201: Predictive Call (Continued)** 

PARTY A	PARTY B (ACD Group)	PARTY C
EventRinging		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN C		
OtherDNRole <b>Destination</b>		
CallState <b>OK</b>		
Answer (TAnswerCall)		
EventEstablished		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN C		
OtherDNRole <b>Destination</b>		
	Release Phase (ConnID 1)	

a. If the switch reports that a call is connected to an answering machine, T-Server also attaches a key-value pair AnswerClass=AM to the call's UserData.

**Table 202: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*		EventReleased	
		ConnID 1	
		ThisDN <b>B</b>	
		OtherDN C	
		CallState <sup>a</sup>	

**Table 202: Abnormal Call Flow (Continued)** 

Interruption Point	PARTY A	PARTY B	PARTY C
**		EventAbandoned ConnID 1 ThisDN B OtherDN C CallState OK	
***	EventAbandoned ConnID 1 ThisDN A OtherDN C CallState OK		

a. CallState in this case may be any of the following:

CallStateGeneralError

 ${\tt CallStateSystemError}$ 

CallStateBusy

CallStateNoAnswer

 ${\tt CallStateAnsweringMachineDetected}$ 

 ${\tt CallStateFaxDetected}$ 

CallStateAllTrunksBusy

CallStateQueueFull

CallStateDropped

CallStateSitDetected

CallStateSitInvalidnum

CallStateSitVacant

 ${\tt CallStateSitIntercept}$ 

CallStateSitUnknown

CallStateSitNocircuit

CallStateSitReorder

## **Predictive Call with Routing**

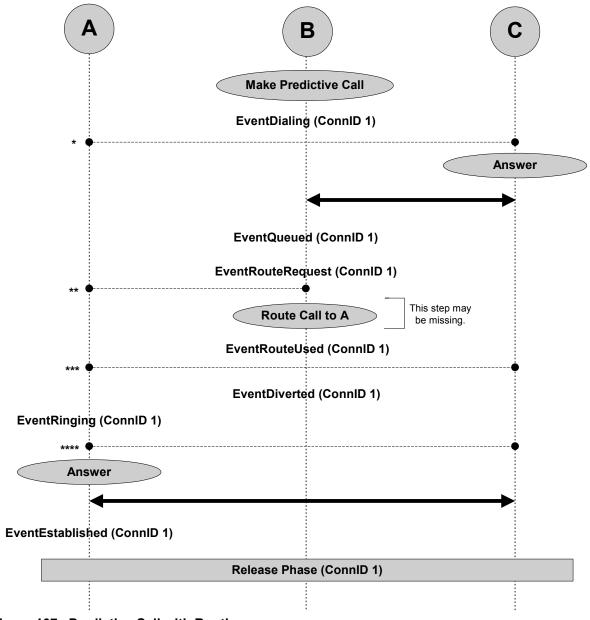


Figure 107: Predictive Call with Routing

**Table 203: Predictive Call with Routing** 

PARTY A	PARTY B (ACD Group)	PARTY C
	Make Predictive Call (TMakePredictiveCall)	
	EventDialing	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole Origination	
	OtherDN C *DIAL	
	OtherDNRole <b>Destination</b>	
		Answer
	EventQueued	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole Origination	
	CallState <b>OK</b> / <b>FaxDetected</b> / <b>AnsweringMachineDetected</b> <sup>a</sup>	
	EventRouteRequest	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Origination</b>	
	OtherDN C	
	OtherDNRole <b>Destination</b>	

**Table 203: Predictive Call with Routing (Continued)** 

PARTY A	PARTY B (ACD Group)	PARTY C
	Route Call to A (TRouteCall)	
	EventRouteUsed	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Origination</b>	
	OtherDN C	
	OtherDNRole <b>Destination</b>	
	ThirdPartyDN <b>A</b> *OPT	
	ThirdPartyDNRole <b>Origination</b> *OPT	
	EventDiverted	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisQueue <b>B</b>	
	ThisDNRole <b>Origination</b>	
	OtherDN C	
	OtherDNRole <b>Destination</b>	
	ThirdPartyDN <b>A</b> *OPT	
	ThirdPartyDNRole <b>Origination</b> *OPT	
EventRinging		
ConnID 1		
ThisDN A		
ThisDNRole <b>Origination</b>		
OtherDN C		
OtherDNRole <b>Destination</b>		
CallState <b>OK</b>		

**Table 203: Predictive Call with Routing (Continued)** 

PARTY A	PARTY B (ACD Group)	PARTY C
Answer (TAnswerCall)		
EventEstablished		
ConnID 1		
ThisDN A		
ThisDNRole Origination		
OtherDN C		
OtherDNRole <b>Destination</b>		
Release Phase (ConnID 1)		

a. If the switch reports that a call is connected to an answering machine, T-Server also attaches a key-value pair AnswerClass=AM to the call's UserData.

**Table 204: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*		EventReleased	
		ConnID 1	
		ThisDN <b>B</b>	
		OtherDN C	
		CallState <sup>a</sup>	
**		EventAbandoned	
and		ConnID 1	
***		ThisDN <b>B</b>	
		OtherDN C	
		CallState <b>OK</b>	
****	EventAbandoned		
	ConnID 1		
	ThisDN A		
	OtherDN C		
	CallState <b>OK</b>		

- a. CallState in this case may be any of the following:
  - CallStateGeneralError
  - ${\tt CallStateSystemError}$
  - CallStateBusy
  - CallStateNoAnswer
  - CallStateAnsweringMachineDetected
  - ${\tt CallStateFaxDetected}$
  - CallStateAllTrunksBusy
  - CallStateQueueFull
  - CallStateDropped
  - ${\tt CallStateSitDetected}$
  - CallStateSitInvalidnum
  - CallStateSitVacant
  - CallStateSitIntercept
  - CallStateSitUnknown
  - CallStateSitNocircuit
  - CallStateSitReorder

# **Predictive Call (Connected to a Device Specified in Extensions)**

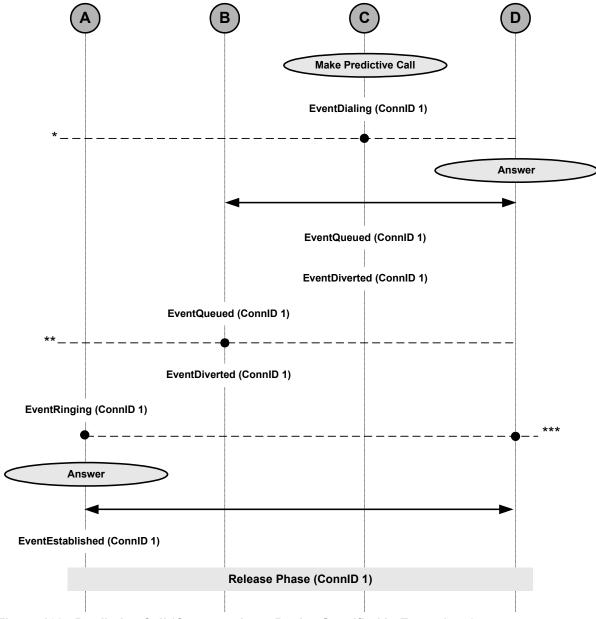


Figure 108: Predictive Call (Connected to a Device Specified in Extensions)

Table 205: Predictive Call (Connected to a Device Specified in Extensions)

PARTY A	PARTY B (ACD Group Specified in the Extensions of TMakePredictiveCall)	PARTY C (Routing Point or ACD Group)	PARTY D
		Make Predictive Call (TMakePredictiveCall)	
		EventDialing	
		ConnID 1	
		ThisDN C	
		ThisQueue C	
		ThisDNRole Origination	
		OtherDN <b>D</b> *DIAL	
		OtherDNRole <b>Destination</b>	
			Answer
		EventQueued	
		ConnID 1	
		ThisDN C	
		ThisQueue C	
		ThisDNRole <b>Origination</b>	
		CallState	
		OK/AnsweringMachine- Detected	
		EventDiverted	
		ConnID 1	
		ThisDN C	
		ThisQueue C	
		ThisDNRole <b>Origination</b>	
		OtherDN <b>D</b>	
		OtherDNRole <b>Destination</b>	
		ThirdPartyDN <b>B</b>	
		ThirdPartyDNRole Origination	

Table 205: Predictive Call (Connected to a Device Specified in Extensions) (Continued)

PARTY A	PARTY B (ACD Group Specified in the Extensions of TMakePredictiveCall)	PARTY C (Routing Point or ACD Group)	PARTY D
	EventQueued		
	ConnID 1		
	This DN <b>B</b>		
	ThisQueue <b>B</b>		
	ThisDNRole <b>Origination</b>		
	OtherDN <b>D</b>		
	OtherDNRole <b>Destination</b>		
	EventDiverted		
	ConnID 1		
	ThisDN <b>B</b>		
	ThisQueue <b>B</b>		
	ThisDNRole Origination		
	OtherDN <b>D</b>		
	OtherDNRole <b>Destination</b>		
	ThirdPartyDN A *OPT		
	ThirdPartyDNRole Origination *OPT		
EventRinging			
ConnID 1			
ThisDN A			
ThisDNRole			
Origination			
OtherDN <b>D</b>			
OtherDNRole <b>Destination</b>			
CallState <b>OK</b>			
CallState UK			

Table 205: Predictive Call (Connected to a Device Specified in Extensions) (Continued)

PARTY A	PARTY B (ACD Group Specified in the Extensions of TMakePredictiveCall)	PARTY C (Routing Point or ACD Group)	PARTY D
Answer (TAnswerCall)			
EventEstablished			
ConnID 1			
ThisDN A			
ThisDNRole Origination			
OtherDN <b>D</b>			
OtherDNRole <b>Destination</b>			
Release Phase (ConnID 1)			

Table 206: Abnormal Call Flow

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
*			EventReleased	
			ConnID 1	
			ThisDN C	
			OtherDN <b>D</b>	
			CallState <sup>a</sup>	

**Table 206: Abnormal Call Flow (Continued)** 

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
**		EventAbandoned ConnID 1 ThisDN B OtherDN D CallState OK		
***	EventAbandoned ConnID 1 ThisDN A OtherDN D CallState OK			

a. CallState in this case may be any of the following:

CallStateGeneralError

 ${\tt CallStateSystemError}$ 

CallStateBusy

CallStateNoAnswer

 ${\tt CallStateAnsweringMachineDetected}$ 

 ${\tt CallStateFaxDetected}$ 

CallStateAllTrunksBusy

CallStateQueueFull

CallStateDropped

CallStateSitDetected

CallStateSitInvalidnum

CallStateSitVacant

 ${\tt CallStateSitIntercept}$ 


CallStateSitUnknown

CallStateSitNocircuit

CallStateSitReorder

## **Monitoring Calls**

## **Service Observing on Agent**

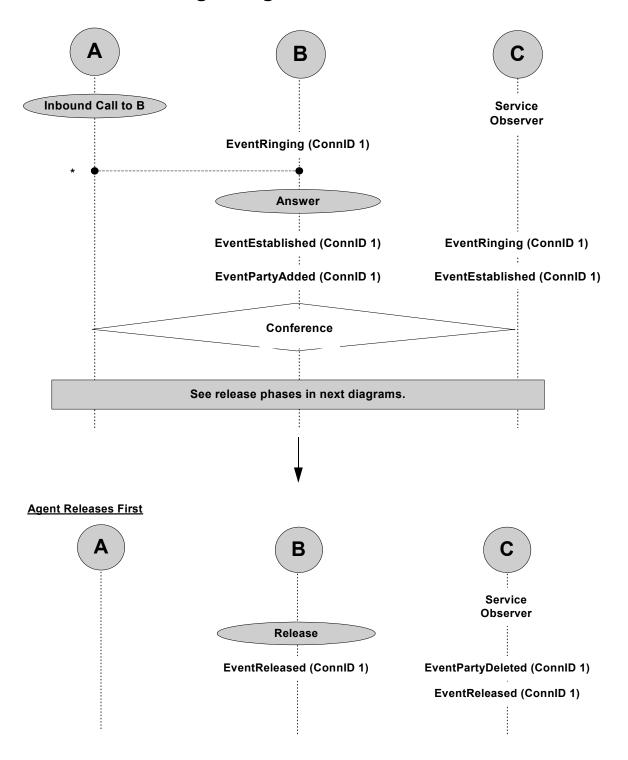

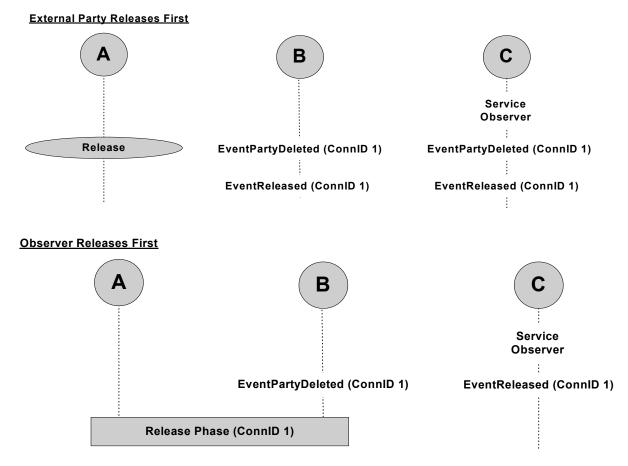


Figure 109: Service Observing on Agent

Table 207: Service Observing on Agent

PARTY A (External)	PARTY B	PARTY C (Service Observer)
Inbound Call		
	EventRinging	
	ConnID 1	
	ThisDN <b>B</b>	
	ThisDNRole <b>Destination</b>	
	OtherDN A	
	OtherDNRole <b>Origination</b>	
	CallState <b>OK</b>	
	Answer (TAnswerCall)	

**Table 207: Service Observing on Agent (Continued)** 

PARTY A (External)	PARTY B	PARTY C (Service Observer)
	EventEstablished	EventRinging
	ConnID 1	ConnID 1
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>
	OtherDN A	OtherDN A <sup>a</sup>
	OtherDNRole <b>Origination</b>	OtherDNRole <b>Origination</b> <sup>b</sup>
	CallState <b>OK</b>	CallState Bridged
	EventPartyAdded	EventEstablished
	ConnID 1	ConnID 1
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>
	OtherDN C	OtherDN A
	OtherDNRole Observer	OtherDNRole Origination
	CallState Bridged	CallState Bridged
Conference		
Release Phase, see description below.		

a. T-Server for the NEC NEAX/APEX switch uses the party that initialized the Service Observer instead of Party A.

b. T-Server for the NEC NEAX/APEX switch uses the role of the party that initialized the Service Observer instead of the role of Party A.

**Table 208: Agent Releases First** 

PARTY B	PARTY C (Service Observer)
Release (TReleaseCall)	
EventReleased	EventPartyDeleted
ConnID 1	ConnID 1
ThisDN <b>B</b>	ThisDN C
ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>
CallState <b>OK</b>	OtherDN <b>B</b>
	OtherDNRole <b>DeletedParty</b>
	CallState <b>OK</b>
	EventReleased
	ConnID 1
	ThisDN C
	ThisDNRole <b>Observer</b>
	OtherDN A
	CallState <b>OK</b>
	Release (TReleaseCall)  EventReleased ConnID 1 ThisDN B ThisDNRole Destination

Table 209: External Party Releases First

PARTY A (External)	PARTY B	PARTY C (Service Observer)
External Party Releases a Call		
	EventPartyDeleted	<b>EventPartyDeleted</b>
	ConnID 1	ConnID 1
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>
	OtherDN A	OtherDN A
	OtherDNRole <b>DeletedParty</b>	OtherDNRole <b>DeletedParty</b>
	ThirdPartyDNRole <b>Observer</b> <sup>a</sup>	CallState <b>OK</b>
	ThirdPartyDN C <sup>a</sup>	
	CallState <b>OK</b>	
	EventReleased	EventReleased
	ConnID 1	ConnID 1
	ThisDN <b>B</b>	ThisDN C
	ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>
	OtherDN C	OtherDN B
	CallState <b>OK</b>	CallState <b>OK</b>

a. The attribute contains observer information.

**Table 210: Observer Releases First** 

PARTY A (External)	PARTY B	PARTY C (Service Observer)	
		Observer Releases a Call	
	<b>EventPartyDeleted</b>	EventReleased	
	ConnID 1	ConnID 1	
	ThisDN <b>B</b>	ThisDN C	
	ThisDNRole <b>Destination</b>	ThisDNRole <b>Observer</b>	
	OtherDN C	CallState <b>OK</b>	
	OtherDNRole <b>Observer</b>		
	ThirdPartyDNRole <b>DeletedBy</b>		
	ThirdPartyDN C		
	CallState <b>OK</b>		
Release Phase (ConnID 1)			

**Table 211: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*		EventAbandoned	
		ConnID 1	
		ThisDN <b>B</b>	
		OtherDN A	
		CallState <b>OK</b>	

# **Service Observing for Agent-Initiated Call**

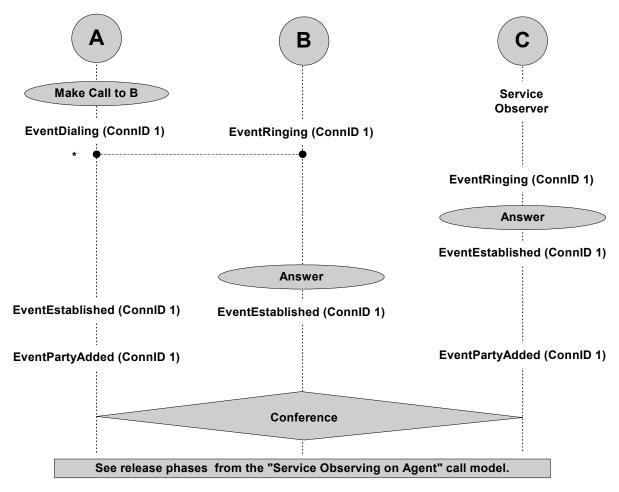


Figure 110: Service Observing for Agent-Initiated Call

Table 212: Service Observing for Agent-Initiated Call

PARTY A	PARTY B	PARTY C
EventDialing	EventRinging	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole	ThisDNRole <b>Destination</b>	
Origination	OtherDN A	
OtherDN <b>B</b>	OtherDNRole <b>Origination</b>	
OtherDNRole <b>Destination</b>	CallState <b>OK</b>	
CallState <b>OK</b>		
		EventRinging
		ConnID 1
		ThisDN C
		ThisDNRole <b>Observer</b>
		OtherDN A <sup>a</sup>
		OtherDNRole <b>Origination</b> <sup>b</sup>
		CallState <b>Bridged</b>
		Answer
		EventEstablished
		ConnID 1
		ThisDN C
		ThisDNRole <b>Observer</b>
		CallState <b>Bridged</b>
	Answer	
EventEstablished	EventEstablished	
ConnID 1	ConnID 1	
ThisDN A	ThisDN <b>B</b>	
ThisDNRole	ThisDNRole <b>Destination</b>	
Origination	OtherDN A	
OtherDN B	OtherDNRole <b>Origination</b>	
OtherDNRole <b>Destination</b>	CallState Bridged	
CallState Bridged		

**Table 212: Service Observing for Agent-Initiated Call (Continued)** 

PARTY A	PARTY B	PARTY C		
EventPartyAdded		<b>EventPartyAdded</b>		
ConnID 1		ConnID 1		
ThisDN A		ThisDN C		
ThisDNRole		ThisDNRole <b>Observer</b>		
Origination		OtherDN <b>B</b>		
OtherDN <b>B</b>		CallState Bridged		
CallState Bridged				
Conference				
Release Phase, see description in "Service Observer on Agent."				

- a. Depending on the make of the switch in use, T-Server might employ the party that initialized the Service Observing instead of Party A.
- b. Depending on the make of the switch in use, T-Server might employ the role of the party that initialized the Service Observing instead of the role of Party A.

**Table 213: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C
*		EventAbandoned	
		ThisDN <b>B</b>	
		OtherDN A	
		CallState <b>OK</b>	

# Service Observing on Queue

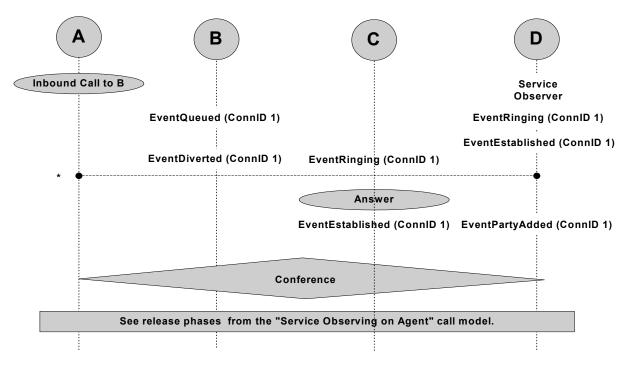


Figure 111: Service Observing on Queue

Table 214: Service Observing on Queue

PARTY A (External)	PARTY B	PARTY C	Party D (Observer)
Inbound Call			
	EventQueued		EventRinging
	ConnID 1		ConnID 1
	ThisDN <b>B</b>		ThisDN <b>D</b>
	ThisDNRole		ThisDNRole <b>Observer</b>
	Destination		OtherDN A
	OtherDN A		OtherDNRole
	OtherDNRole		Origination
	Origination		CallState Bridged

Table 214: Service Observing on Queue (Continued)

PARTY A (External)	PARTY B	PARTY C	Party D (Observer)
			EventEstablished
			ConnID 1
			ThisDN <b>D</b>
			ThisDNRole <b>Observer</b>
			OtherDN A
			OtherDNRole
			Origination
			CallState <b>Bridged</b>
	EventDiverted	EventRinging	
	ConnID 1	ConnID 1	
	ThisDN <b>B</b>	ThisDN C	
	ThisQueue <b>B</b>	ThisDNRole	
	ThisDNRole	Destination	
	Destination	OtherDN A	
	OtherDN A	OtherDNRole Origination	
	OtherDNRole Origination	CallState <b>Bridged</b>	
	ThirdPartyDN C *OPT	Canstate Bridged	
	ThirdPartyDNRole		
	<b>Destination</b> *OPT		
		Answer (TAnswerCall)	
		EventEstablished	EventPartyAdded
		ConnID 1	ConnID 1
		ThisDN C	ThisDN <b>D</b>
		ThisDNRole	ThisDNRole <b>Observer</b>
		Destination	OtherDN C
		OtherDN A	OtherDNRole
		OtherDNRole Origination	NewParty
		CallState Bridged	ThirdPartyDN C
		Extensions:	ThirdPartyDNRole <b>AddedBy</b>
		OrigDN-1=A	CallState Bridged
		OrigDN-2=D	Canbiaic Driugeu
		Oligidin-2-D	

Table 214: Service Observing on Queue (Continued)

PARTY A (External)	PARTY B	PARTY C	Party D (Observer)
	EventDiverted ConnID 1 ThisDN B ThisQueue B ThisDNRole Destination OtherDN A OtherDNRole Origination ThirdPartyDN C *OPT ThirdPartyDNRole Destination *OPT	EventRinging ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination CallState Bridged	EventEstablished ConnID 1 ThisDN D ThisDNRole Observer OtherDN A OtherDNRole Origination CallState Bridged
		Answer (TAnswerCall)	
		EventEstablished ConnID 1 ThisDN C ThisDNRole Destination OtherDN A OtherDNRole Origination CallState Bridged Extensions: OrigDN-1=A OrigDN-2=D	EventPartyAdded ConnID 1 ThisDN D ThisDNRole Observer OtherDN C OtherDNRole NewParty ThirdPartyDN C ThirdPartyDNRole AddedBy CallState Bridged

**Table 214: Service Observing on Queue (Continued)** 

PARTY A (External)	PARTY B	PARTY C	Party D (Observer)	
Conference				
Release Phase, see description in "Service Observer on Agent."				

**Table 215: Abnormal Call Flow** 

Interruption Point	PARTY A	PARTY B	PARTY C	PARTY D
*			EventAbandoned	EventReleased
			ConnID 1	ConnID 1
			ThisDN C	ThisDN <b>D</b>
			OtherDN A	ThisDNRole <b>Observer</b>
			CallState <b>OK</b>	OtherDN A
				CallState <b>OK</b>

# **Working With Queues**

# Multiple-Queue Call Treated at an IVR Port: Treatment at IVR Queue

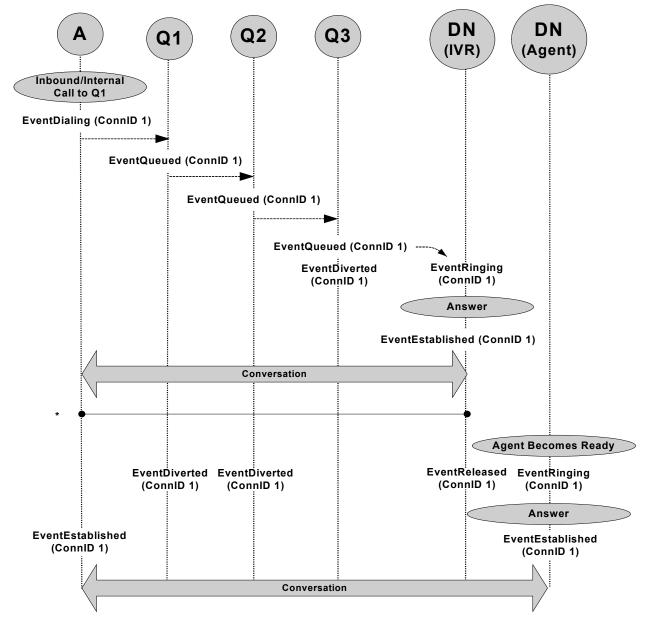


Figure 112: Multiple Queue, Call Treated at an IVR Port: Treatment at IVR Queue

Table 216: Multiple Queue, Call Treated at an IVR Port: Treatment at IVR Queue

Α	Q1	Q2	Q3	IVR	Agent
Inbound /Internal Call to Q1	Call to Q1				
EventDialing					
ConnID 1					
ThisDN A					
ThisDNRole <b>Origination</b>					
OtherDN* Q1					
OtherDNRole <b>Destination</b>					
	EventQueued				
	ConnID 1				
	ThisDN Q1				
	ThisQueue Q1				
	OtherDN A				
		Call Placed in Second Queue			
		EventQueued			
		ConnID 1			
		ThisDN <b>Q2</b>			
		ThisQueue <b>Q2</b>			
		OtherDN A			
			Call Placed in IVR Queue for Treatment When No Agents Ready		

Table 216: Multiple Queue, Call Treated at an IVR Port: Treatment at IVR Queue (Continued)

A	Q1	Q2	Q3	IVR	Agent
			EventQueued		
			ConnID 1		
			ThisDN Q2		
			ThisQueue <b>Q2</b>		
			OtherDN A		
			EventDiverted	EventRinging	
			ConnID 1	ConnID 1	
			ThisDN Q3	ThisDN IVR	
			ThisQueue <b>Q3</b>	ThisQueue <b>Q3</b>	
			OtherDN A	OtherDN A	
			ThirdPartyDN	CallState	
			IVR DN	ConverseOn	
			CallState ConverseOn		
				Answer	
				EventEstablished	
				ConnID 1	
				ThisDN IVR	
				ThisQueue <b>Q3</b>	
				OtherDN A	
					Agent Ready
	EventDiverted	EventDiverted		<b>EventReleased</b> <sup>a</sup>	EventRinging
	ConnID 1	ConnID 1		ConnID 1	ConnID 1
	ThisDN RQ2	ThisDN Q2		ThisDN IVR	ThisDN
	ThisQueue	ThisQueue <b>Q2</b>		ThisQueue <b>Q3</b>	AgentDN
	RQ2	OtherDN A		OtherDN A	ThisQueue <b>Q1</b>
	OtherDN A	ThirdPartyDN			OtherDN A
	ThirdPartyDN <b>AgentDN</b>	AgentDN			

Table 216: Multiple Queue, Call Treated at an IVR Port: Treatment at IVR Queue (Continued)

Q1	Q2	Q3	IVR	Agent
				Answer
				Event- Established
				ConnID 1 ThisDN
				AgentDN ThisQueue Q1
				OtherDN A CallState OK
	Q1	Q1 Q2	Q1 Q2 Q3	Q1 Q2 Q3 IVR

a. EventReleased can occur before an agent becomes available because the IVR finishes call treatment.

**Table 217: Abnormal Call Flow** 

Interruption Point	Α	Q1	Q2	Q3	IVR	Agent
*	EventReleased OtherDN Q1	Event- Abandoned	Event- Abandoned	Event- Abandoned	EventReleased ConnID 1	
	,	ConnID 1 ThisDN Q1 OtherDN A	ConnID 1 ThisDN Q2 OtherDN A	ConnID 1 ThisDN Q3 OtherDN A	ThisDN IVR OtherDN A	

b. In some deployments, EventEstablished for party A can occur at the same time as the IVR EventEstablished, especially if a call comes through the PSTN.

# Multiple-Queue Call Treated at an IVR Port: Direct Treatment at IVR Port

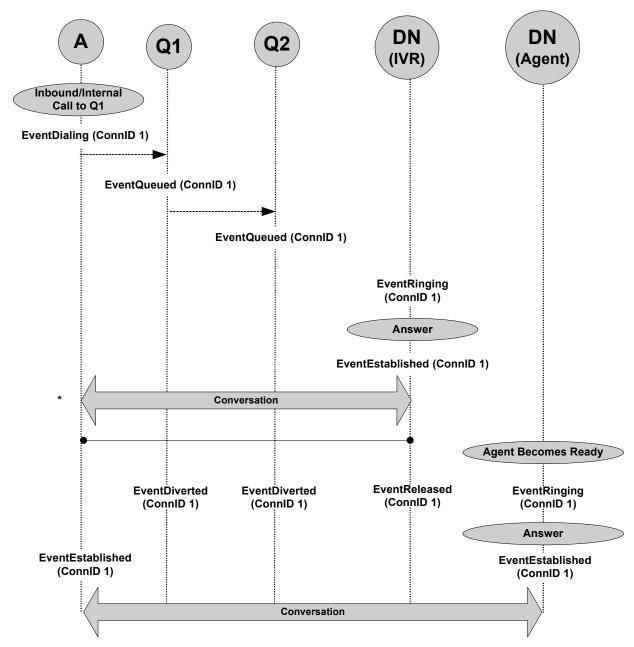


Figure 113: Multiple Queue, Call Treated at an IVR Port: Direct Treatment at IVR Port

**Table 218: Multiple Queue, Call Treated at an IVR Port:** Direct Treatment at IVR Port

External Party	Q1	Q2	IVR	Agent
Inbound /Internal Call to Q1	Call to Q1			
EventDialing				
ConnID 1				
ThisDN A				
ThisDNRole Origination				
OtherDN* Q1				
OtherDNRole  Destination				
	EventQueued			
	ConnID 1			
	ThisDN <b>Q1</b>			
	ThisQueue <b>Q1</b>			
	OtherDN A			
		Call Placed in Second Queue		
		EventQueued		
		ConnID 1		
		ThisDN <b>Q2</b>		
		ThisQueue <b>Q2</b>		
		OtherDN A		
			Call Placed Directly to IVR Port	
			EventRinging	
			ConnID 1	
			ThisDN IVR	
			OtherDN A	
			CallState ConverseOn	

Table 218: Multiple Queue, Call Treated at an IVR Port: Direct Treatment at IVR Port (Continued)

External Party	Q1	Q2	IVR	Agent
			Answer	
			EventEstablished	
			ConnID 1	
			ThisDN IVR	
			OtherDN A	
				Agent Ready
	EventDiverted	EventDiverted	<b>EventReleased</b> <sup>a</sup>	EventRinging
	ConnID 1	ConnID 1	ConnID 1	ConnID 1
	ThisDN <b>RQ2</b>	ThisDN Q2	ThisDN IVR	ThisDN <b>AgentDN</b>
	ThisQueue <b>RQ2</b>	ThisQueue <b>Q2</b>	OtherDN A	ThisQueue <b>Q1</b>
	OtherDN A	OtherDN A		OtherDN A
	ThirdPartyDN <b>AgentDN</b>	ThirdPartyDN <b>AgentDN</b>		
				Answer
<b>EventEstablished</b> <sup>b</sup>				EventEstablished
ConnID 1				ConnID 1
ThisDN A				ThisDN <b>AgentDN</b>
OtherDN AgentDN				ThisQueue Q1
CallState <b>OK</b>				OtherDN A
				CallState <b>OK</b>

a. EventReleased can occur before an agent becomes available because the IVR finishes call treatment.

Genesys 🥃

b. In some deployments, EventEstablished for party A can occur at the same time as the IVR EventEstablished, especially if a call comes through the PSTN.

**Table 219: Abnormal Call Flow** 

Interruption Point	External Party	Q1	Q2	IVR	Agent
*	EventReleased	EventAbandoned	EventAbandoned	EventReleased	
	OtherDN Q1	ConnID 1	ConnID 1	ConnID 1	
		ThisDN Q1	ThisDN Q2	ThisDN IVR	
		OtherDN A	OtherDN A	OtherDN A	

# Multiple-Queue Call: Call Removed from Queue

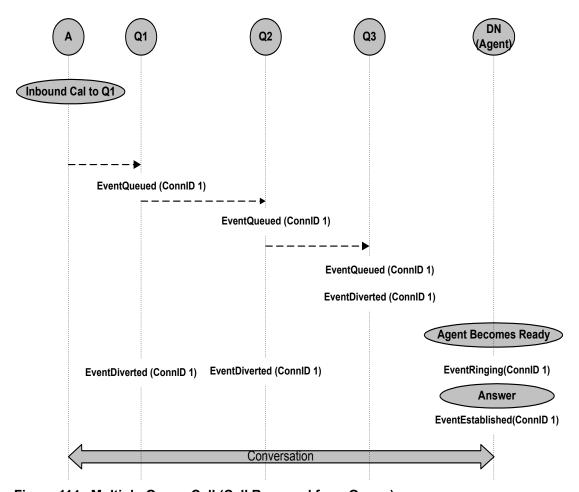


Figure 114: Multiple-Queue Call (Call Removed from Queue)

Table 220: Multiple-Queue Call (Call Removed from Queue)

Α	Q1	Q2	IVR	Agent
Inbound Call to Q1	Call to Q1			
	EventQueued			
	ConnID 1			
	ThisDN Q1			
	ThisQueue Q1			
	OtherDN A			
		Call Placed in Second Queue		
		EventQueued		
		ConnID 1		
		ThisDN Q2		
		ThisQueue <b>Q2</b>		
		OtherDN A		
			Call Placed in Third Queue for Treatment When No Agents Ready	
			EventQueued	
			ConnID 1	
			ThisDN Q3	
			ThisQueue <b>Q3</b> OtherDN <b>A</b>	
			Call Cleared	
			from Third Queue	
			EventDiverted	
			ConnID 1	
			ThisDN Q3	
			ThisQueue <b>Q3</b>	
			OtherDN A	
			CallState Cleared	

Table 220: Multiple-Queue Call (Call Removed from Queue) (Continued)

Α	Q1	Q2	IVR	Agent
				Agent Ready
	EventDiverted	EventDiverted		EventRinging
	ConnID 1	ConnID 1		ConnID 1
	ThisDN Q1	ThisDN <b>Q2</b>		ThisDN <b>AgentDN</b>
	ThisQueue <b>Q1</b>	ThisQueue <b>Q2</b>		ThisQueue <b>Q1</b>
	OtherDN A	OtherDN A		OtherDN A
	ThirdPartyDN	ThirdPartyDN		CallState <b>OK</b>
	AgentDN	AgentDN		
				Answer
				EventEstablished
				ConnID 1
				ThisDN <b>AgentDN</b>
				ThisQueue <b>Q1</b>
				OtherDN A
				CallState <b>OK</b>

# **Network T-Server Attended Transfer Call Flows**

## **Standard Network Call Initiation**

Figure 115 illustrates the standard call setup for a call entering a Genesys environment through a network T-Server. The diagrams that follow it in this section assume the completion of this stage and present common network attended transfer scenarios and a few error cases.

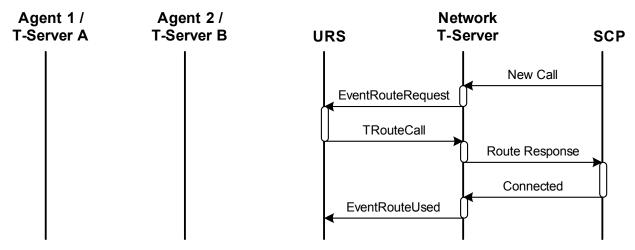


Figure 115: Standard Network Call Initiation

#### **Consultation Leg Initiation, Specific Destination**

Figure 116 illustrates the creation of the consultation leg in a case where the destination DN and its location are provided in the TNetworkConsult() function call.

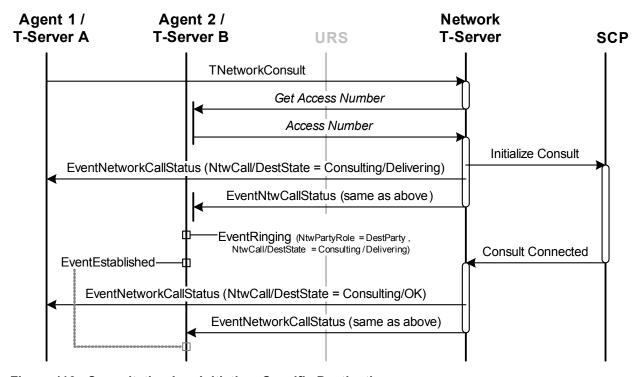


Figure 116: Consultation Leg Initiation, Specific Destination

#### **Failed Consultation: Specific Target**

In Figure 117, the request to consult has failed. Events shown with dotted lines are distributed only when the call is delivered to the intended destination, but not answered (for instance, when State = NoAnswer). Since the consult request in this case is made to a specific DN and location, an explicit reconnect request (or another TNetworkConsult request, if allowed by the given SCP) from Agent 1 is required. Until such a request is made, the call remains in the Consulting/NoParty state.

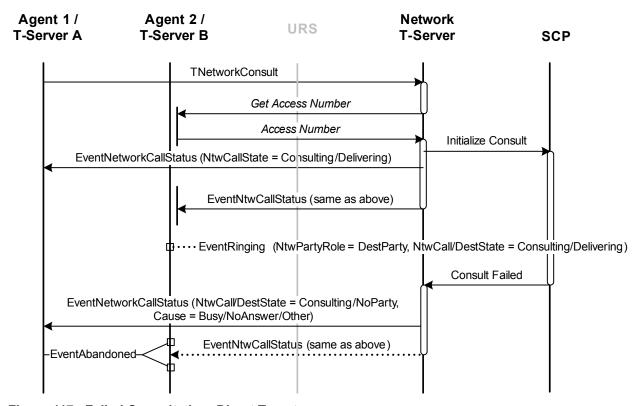


Figure 117: Failed Consultation: Direct Target

# Consultation Leg Initiation, URS Selected Destination

Figure 118 illustrates the creation of the consultation leg in a case where the destination DN and its location are provided by URS. In this case the original caller is still connected to the call (speaking with Agent 1) while URS selects the target. The caller is then placed on hold the moment the consultation leg is created. Depending on the given SCP's capabilities, other scenarios are also possible. For example:

 The original caller might be put on hold immediately (as is the case with conventional local two-step transfers). In such a case, the value for NetworkState for the first event is Consulting/Routing. • The original caller might be connected to the call throughout the entire consult and delivery phase, and then put on hold only when the destination (Agent 2) answers the call. In this case, the second event has a value of ConsultHeld instead of Consulting.

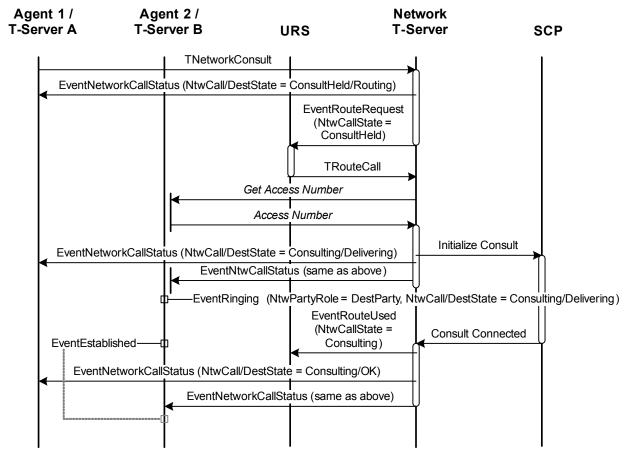


Figure 118: Consultation Leg Initiation, URS Selected Destination

#### **Failed Consultation: URS Selected Destination**

Figure 119 shows a failed request for consultation. Events shown with dotted lines are distributed only when the call is delivered to the intended destination, but not answered (for instance, when State = NoAnswer). Because URS controls consultation initiation in this case, no explicit reconnection is required. URS continues to offer different route targets until the consultation is connected. (The shaded portion of the diagram may repeat several times.) At this point:

- Reconnect can still occur manually.
- URS can reconnect using a reject or default route instruction.

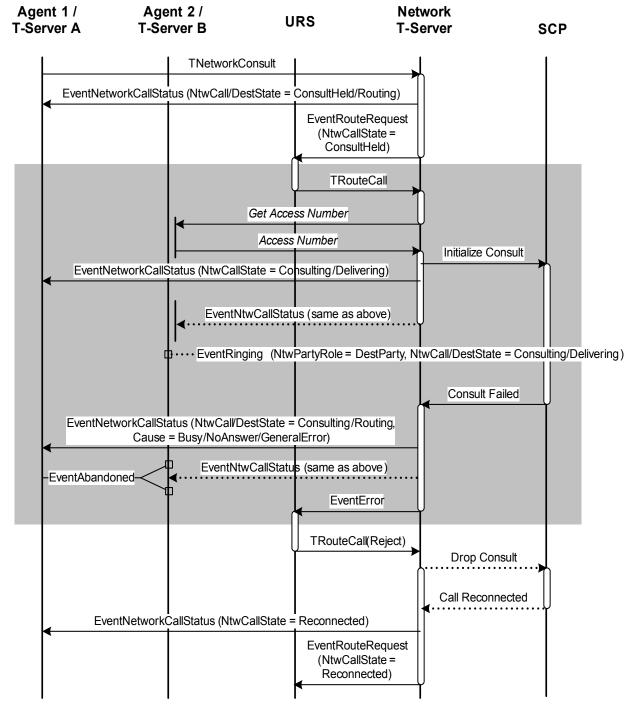


Figure 119: Failed Consultation: URS Selected Target

## **Transfer/Conference Completion: Explicit**

Figure 120 illustrates the completion of either a network-attended transfer or conference. It assumes that the call had a successful consultation phase for its transfer or conference completion to be valid. This assumption is necessary

since EventNetworkCallStatus is a direct response to the TNetworkTransfer feature request. The Network T-Server sends Agent 1 EventNetworkCallStatus regardless of whether the call has already been released.

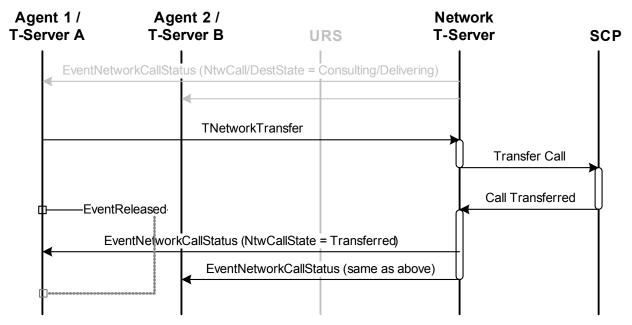


Figure 120: Transfer/Conference Completion: Explicit

#### **Transfer Completion: Implicit**

An implicit transfer completion occurs when Agent 1's channel becomes disconnected and the call has a status of Consulting, ConsultHeld, or Conferencing.

**Note:** This scenario applies only when the disconnection is with respect to Agent 1. (For details on a disconnection with Agent 2, see "Implicit Reconnection (by SCP)" on page 388 and "Implicit Reconnection (by Network T-Server)" on page 388. For a disconnection with respect to the caller, see "Caller Abandonment" on page 389.)

EventNetworkCallStatus is sent to Agent 1 only if T-Server A delays the release of EventReleased for some reason.

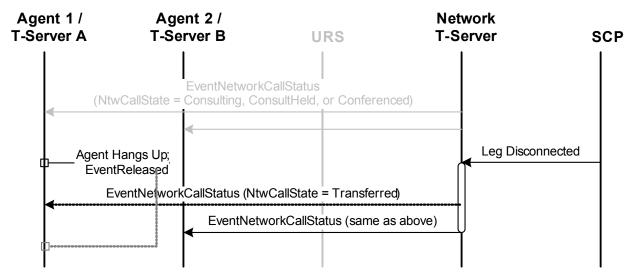


Figure 121: Network Attended Transfer Completion: Implicit

#### **Conference Completion**

Figure 122 illustrates a standard conference completion.

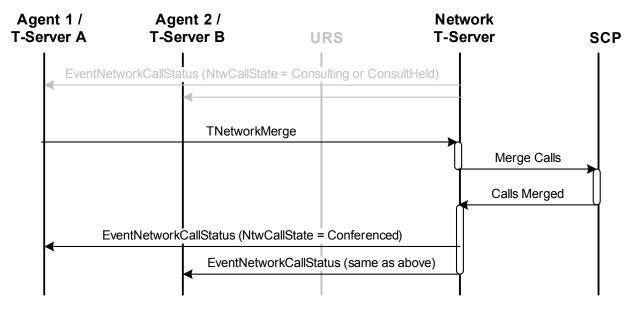


Figure 122: Conference Completion

#### **Alternate Call Service**

Figure 123 shows alternate call service. This diagram contains two variations of the service to show different possible network states for the events.

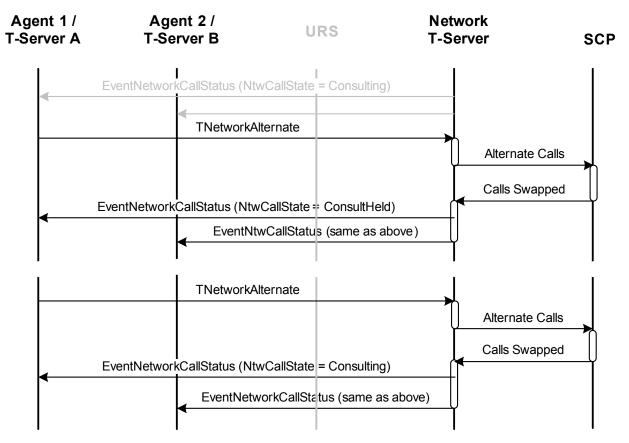


Figure 123: Alternate Call Service

## **Alternate Call Service with Transfer Completion**

Figure 124 demonstrates the applicability of TNetworkTransfer after the use of the alternate call service.

**Note:** TNetworkConference, TNetworkReconnect, and the implicit form of transfer completion are also available after an instance of the alternate call service.

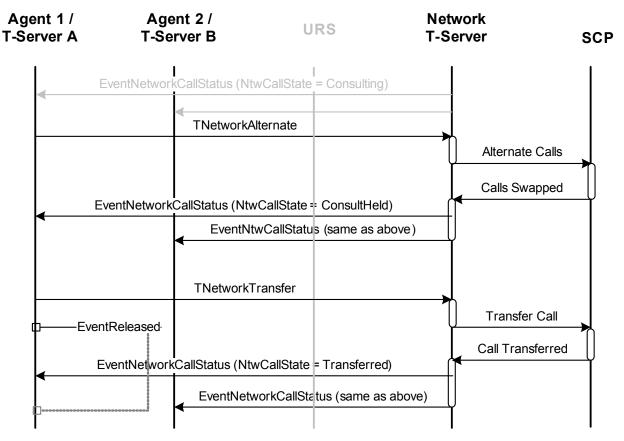


Figure 124: Alternate Call Service with Transfer Completion

#### Reconnection

The following three figures show the call flows for reconnecting the caller to Agent 1. As with transfer completion, reconnection has both explicit (Figure 125) and implied (Figure 126 and Figure 127 on page 389) forms. In fact, the only difference between the implicit form for network transfer and network reconnect is a party's relationship to the original call. If the controlling agent disconnects, the action is considered a transfer. If the destination agent disconnects, it is considered a reconnection.

#### **Explicit Reconnect**

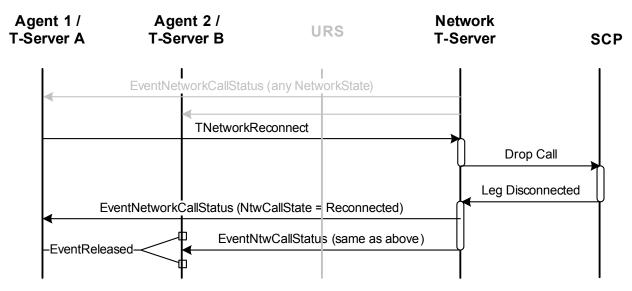


Figure 125: Network Attended Reconnect: Explicit

#### Implicit Reconnection (by SCP)

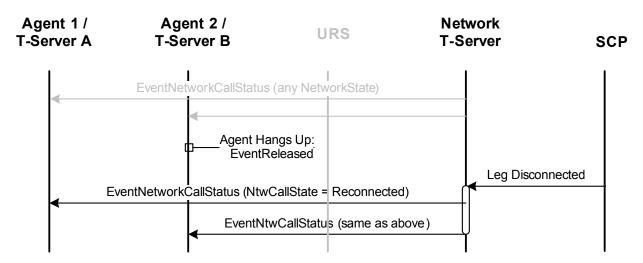


Figure 126: Network Attended Reconnect: Implicit by SCP

#### Implicit Reconnection (by Network T-Server)

In some cases, if Agent 2 disconnects while the consultation call is on hold, SCP leaves the consultation leg to be dropped manually. Although this operation then becomes the responsibility of the Network T-Server, the client may get a notification regarding an intermediate state, as shown in Figure 127.

Genesys S

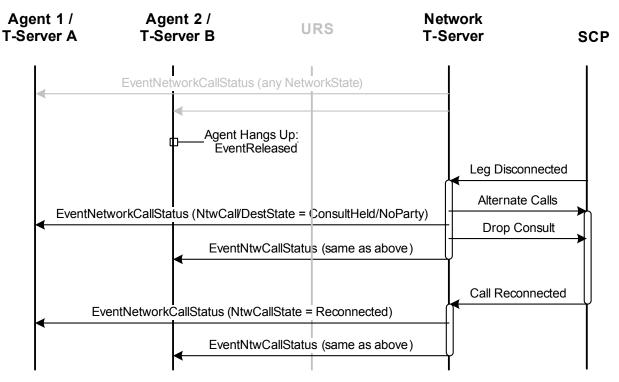


Figure 127: Network Attended Reconnect: Implicit by Network T-Server

#### **Caller Abandonment**

Figure 128 illustrates a caller abandonment scenario. If at any time during a multi-party call the origination party disconnects, the SCP may choose to end the call outright, or send a leg disconnected message.

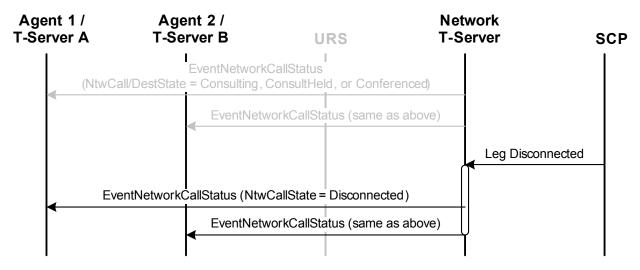


Figure 128: Caller Abandonment

#### **Network Single-Step Transfer**

For single-step transfers, the operation is complete immediately after the new call leg is created. Thus, for the external observer, there is no consultation phase.

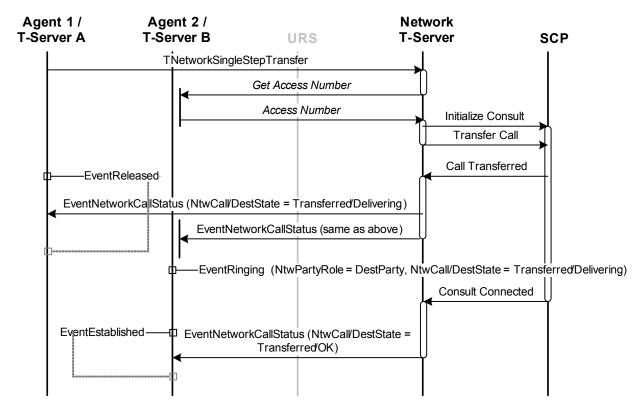


Figure 129: Network Attended Single-Step Transfer

#### **Premature Disconnection, One Variation**

If an agent disconnects the call prior to completion of the consultation leg, a number of things can happen, depending on the current state of the consultation. One variation is detailed in Figure 130. In this case, the disconnection occurs prior to the SCP being aware of a pending consultation. The message from the SCP is likely to be Call Dropped, as only the caller would remain on the call.

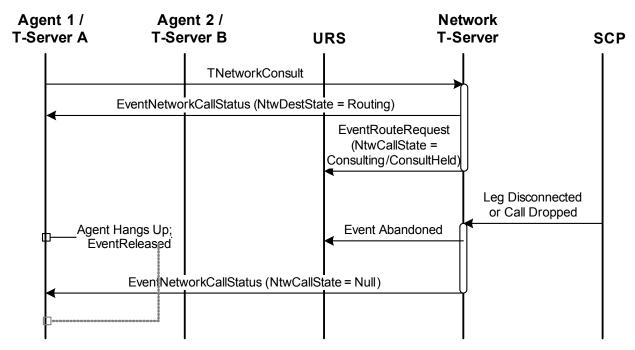


Figure 130: Premature Disconnection 1

#### **Premature Disconnection, a Second Variation**

Figure 131 shows Agent 1 disconnecting after the SCP has been notified of a call, but prior to its connection (or failure). Since the state of the consultation is not known, the call considered to have transferred. The SCP at this point should connect the original caller with the consultation target. The call at this point is treated identically to a normal inbound call that is waiting for its connection status from the SCP. The network attended session is complete, and no further NetworkCallStatus events are distributed.

If the delivery results in failure (or a NoAnswer condition), URS should re-route the call to a different target. However, if the call was intended for an explicitly specified target (and URS is not in control of the consultation leg), any call status other than Connected results in default routing instructions being returned to the SCP, and the call ending.

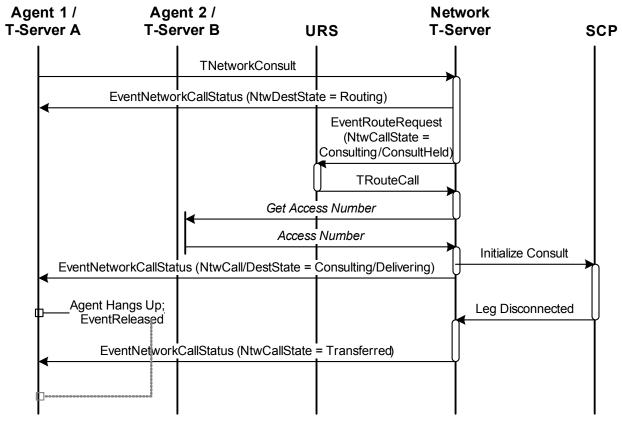


Figure 131: Premature Disconnection: a Second Variation

#### **Transactional Error**

A T-Library client is required to wait for a network status message prior to attempting further call control. This message is either the next status message after making its network request or EventError. Failure to abide by this results in an error being returned to the requestor.

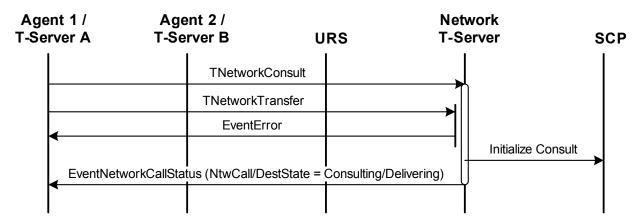


Figure 132: Transactional Error

Genesys S



#### Chapter

# 7

# **Basic Interaction Models**

This chapter presents models representing basic tasks that the Multimedia components perform. It consists of these sections:

- Overview, page 393
- Registration, page 394
- Media Server Submits Interaction, page 396
- Agent Submits Interaction, page 397
- Stop Processing, page 399
- Change Properties, page 404
- Place Interaction in Queue, page 408
- Place Interaction in Workbin, page 409
- Deliver Interaction to Agent, page 411
- Agent Pulls Interaction, page 414
- Transfer, page 418
- Conference, page 421
- Workbin Operations, page 427
- Snapshot Operations, page 430
- Intrusion, page 433
- Login/Logout, page 437
- Reporting Engine Connects, page 440
- Disconnection and Failover, page 441
- Invoke Autoresponse, page 444

#### **Overview**

This chapter presents interaction models in terms of scenarios. Some scenarios are made up of a single model. Others consist of several models that represent different temporal phases. Others collect several models that represent different but related versions of a single general scenario.

The events that occur in each model are all documented in Open Media Interaction Models documentation.

# Registration

This set of models illustrates successful and unsuccessful registration. Successful registration proceeds as follows:

- 1. A client connects to Interaction Server.
- **2.** The client asks to register.
- 3. Interaction Server checks to see if the client is valid. If the client is valid, Interaction Server sends EventAck.

Unsuccessful registration proceeds as follows:

- 1. A client connects to Interaction Server.
- **2.** One of the following happens:
  - The client asks to register, but Interaction Server finds that it is not a valid client.
  - The client sends any other message to Interaction Server.
- 3. In either case, Interaction Server returns EventError.
- **4.** When a timeout expires, Interaction Server disconnects.

# **Successful Registration**

In this phase, shown in Figure 133, a client connects, then asks to register.




Figure 133: Successful Registration

This phase uses the messages listed in Table 221.

Table 221: Messages in Successful Registration

Message	Protocol
EventAck	Interaction Management

# **Unsuccessful Registration**

In this phase, shown in Figure 134, Interaction Server finds that the client is not valid. It may do this in response to RequestRegisterClient or to any other message from the client. In any case, Interaction Server responds with EventError, then disconnects from the client.

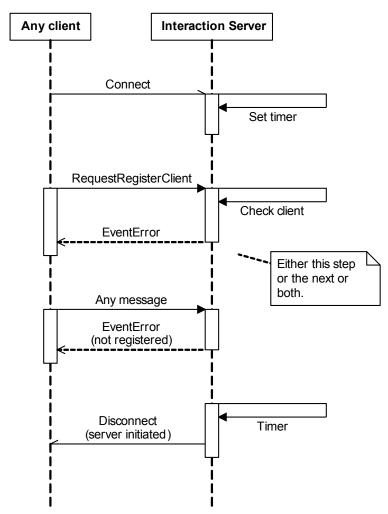


Figure 134: Unsuccessful Registration

Figure 134 actually contains three possible versions:

- a. Client sends RequestRegisterClient, Interaction Server finds that the client is not valid. Interaction server returns EventError.
- **b.** Client sends any message Interaction Server finds that the client is not registered, Interaction server returns EventError.
- **c.** First a, then b.

This phase uses the messages listed in Table 222.

Table 222: Messages in Unsuccessful Registration

Message	Protocol
EventError	Interaction Management

## **Media Server Submits Interaction**

This set of models illustrates the following scenario:

- 1. A media server asks to submit an interaction to Interaction Server. Interaction Server checks the interaction's parameters. If the parameters are correct, Interaction Server accepts the request.
- **2.** If Interaction Server discovers that the parameters are incorrect, it rejects the request.

#### **Media Server Asks to Submit**

In this phase, shown in Figure 135, a media server sends RequestSubmit to Interaction Server.

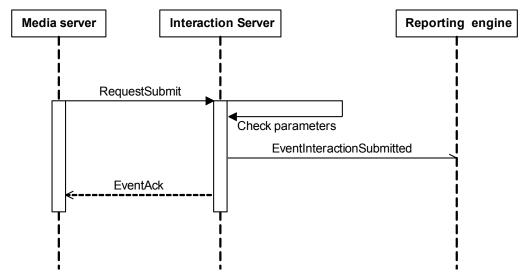


Figure 135: Media Server Asks to Submit

This phase uses the messages listed in Table 223.

Table 223: Messages in Media Server Asks to Submit

Message	Protocol
EventAck	Interaction Management
EventInteractionSubmitted	Reporting

#### **Unsuccessful Submission by Media Server**

In this phase, shown in Figure 136, Interaction Server discovers a problem, such as that the media server is not registered as a client, or that there is a error in one of the attributes of RequestSubmit.

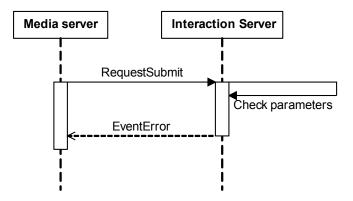


Figure 136: Unsuccessful Submission by Media Server

This phase uses the messages listed in Table 224.

Table 224: Messages in Unsuccessful Submission by Media Server

Message	Protocol
EventError	Interaction Management

# **Agent Submits Interaction**

This set of models illustrates the following scenario:

- 1. An agent asks to submit an interaction.
- 2. Interaction Server checks the validity of the agent application.
- **3.** One of the following happens:

- If the agent application is valid, Interaction Server accepts the submission and informs the reporting engine.
- If the agent application is not valid, Interaction Server rejects the submission.

#### **Successful Submission**

A successful submission is shown in Figure 137.

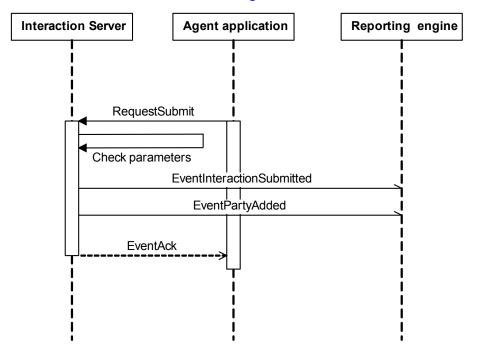


Figure 137: Successful Submission by Agent

This model uses the messages listed in Table 225.

Table 225: Messages in Successful Submission by Agent

Message	Protocol
EventAck	Interaction Management
EventInteractionSubmitted	Reporting
EventPartyAdded	Reporting

#### **Unsuccessful Submission**

An unsuccessful submission is shown in Figure 138.




Figure 138: Unsuccessful Submission by Agent

This model uses the messages listed in Table 226.

Table 226: Messages in Unsuccessful Submission by Agent

Message	Protocol
EventError	Interaction Management

# **Stop Processing**

This scenario has several versions, depending on these two points:

- Which entity initiates the stop processing request: media server, agent, or URS
- If a media server initiates the request, there is a further difference according to whether an agent or URS is involved in processing.

This produces four possible versions, called A, B, C, and D in this section:

A—Initiated by media server, agent involved in processing

B (page 400)—Initiated by media server, URS involved in processing

C (page 401)—Initiated by agent

D (page 402)—Initiated by URS

#### A: Initiated by Media Server, Agent Involved

In this version, shown in Figure 139, an agent is processing the interaction when a media server asks for processing to stop.

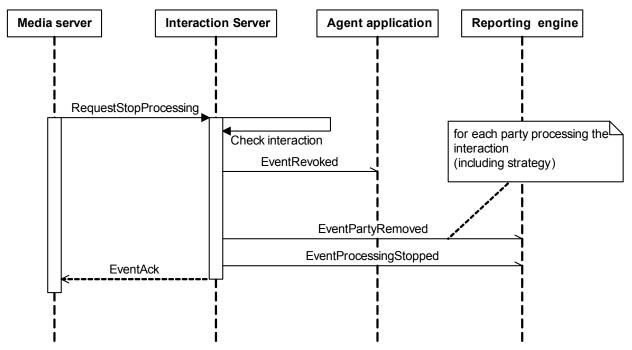


Figure 139: Stop Processing A: Media Server Initiates, Agent Involved

This version uses the messages listed in Table 227.

Table 227: Messages in Stop Processing A

Message	Protocol
EventAck	Interaction Management
EventPartyRemoved	Reporting
EventProcessingStopped	Reporting
EventRevoked	Interaction Management

## **B: Initiated by Media Server, URS Involved**

In this version, shown in Figure 140, URS is processing the interaction when a media server asks for processing to stop.

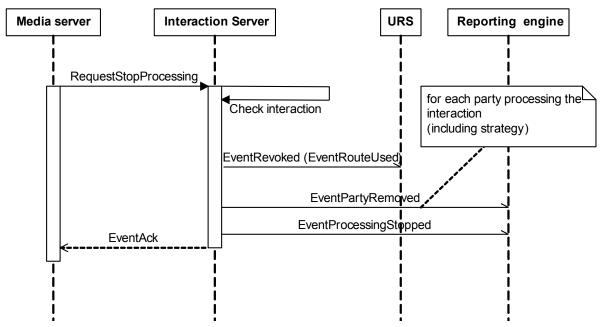


Figure 140: Stop Processing B: Media Server Initiates, URS Involved

This version uses the messages listed in Table 228.

Table 228: Messages in Stop Processing B

Message	Protocol
EventAck	Interaction Management
EventPartyRemoved	Reporting
EventProcessingStopped	Reporting
EventAbandoned, used here in place of EventRevoked	T-Library

This model uses the T-Library EventRouteUsed to stand in for the Interaction Management EventRevoked.

## C: Initiated By Agent

In this version, shown in Figure 141, an agent initiates the stop processing request.

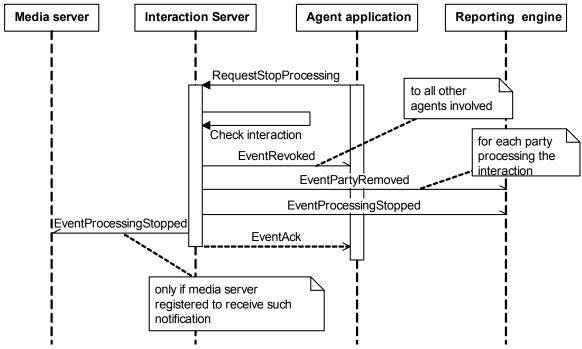


Figure 141: Stop Processing C: Initiated by Agent

This version uses the messages listed in Table 229.

Table 229: Messages in Stop Processing C

Message	Protocol
EventAck	Interaction Management
EventPartyRemoved	Reporting
EventProcessingStopped	Reporting
EventRevoked	Interaction Management

## D: Initiated by URS

In this version, shown in Figure 142, URS initiates the stop processing request.

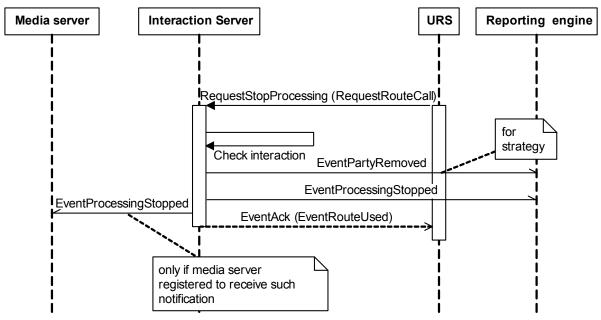


Figure 142: Stop Processing D: Initiated by URS

This version uses the messages listed in Table 230.

Table 230: Messages in Stop Processing D

Message	Protocol
EventAck	Interaction Management
EventPartyRemoved	Reporting
EventProcessingStopped	Reporting
EventRouteUsed, used here in place of EventAck	T-Library

This phase uses the T-Library RequestRouteCall to stand in for the Interaction Management RequestStopProcessing. It also uses the T-Library EventRouteUsed to stand in for the Interaction Management EventAck.

#### Unsuccessful

In this version, shown in Figure 143, Interaction Server finds that the request is invalid and rejects it.

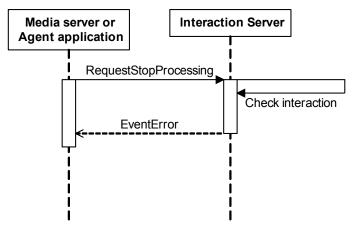


Figure 143: Stop Processing: Unsuccessful

This version uses the messages listed in Table 231.

Table 231: Messages in Stop Processing: Unsuccessful

Message	Protocol
EventError	Interaction Management

## **Change Properties**

This scenario has several versions, differentiated first of all according to which entity initiates the request to change properties:

- Media server initiates the request
  - While an agent is processing the interaction.
  - While URS is processing the interaction.
- URS initiates the request (only while URS is processing).

## Media Server Requests While Agent is Processing

In this phase, shown in Figure 144, a media server asks to change the properties of an interaction. Interaction Server informs the reporting engine and the agent who is processing the interaction.

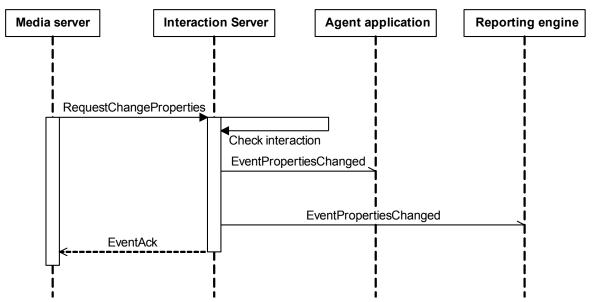


Figure 144: Media Server Requests While Agent is Processing

This phase uses the messages shown in Table 232.

Table 232: Messages in Media Server Requests While Agent is Processing

Message	Protocol
EventAck	Interaction Management
EventPropertiesChanged	Interaction Management

### Media Server Requests While URS is Processing

In this phase, shown in Figure 145, a media server asks to change the properties of an interaction. Interaction Server informs the reporting engine and URS, which is processing the interaction.

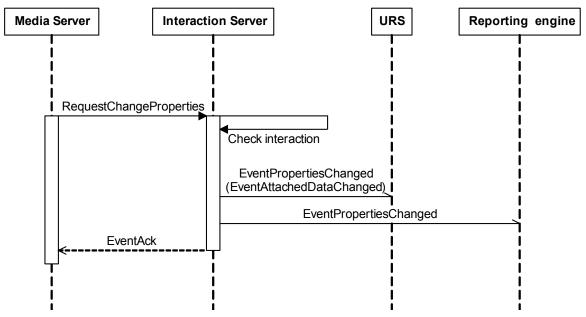


Figure 145: Media Server Requests While URS is Processing

This phase uses the messages shown in Table 233.

Table 233: Messages in Media Server Requests, URS is Processing

Message	Protocol
EventAck	Interaction Management
EventAttachedDataChanged, used here in place of EventPropertiesChanged	T-Library

This phase uses the T-Library EventAttachedDataChanged to stand in for the Interaction Management EventPropertiesChanged.

#### **URS Requests**

In this phase, shown in Figure 146, URS changes the interaction properties. If the media server has included the extension event\_properties\_changed, with nonzero value, in its RequestRegisterClient message, then Interaction Server sends EventProperitesChanged informing it of the change.

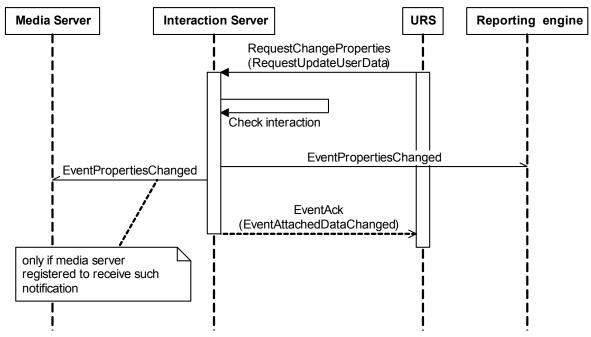


Figure 146: URS Requests

This phase uses the messages shown in Table 234.

Table 234: Messages in URS Requests

Message	Protocol
EventAttachedDataChanged, used here in place of EventAck	T-Library
EventPropertiesChanged	Interaction Management

This phase uses the T-Library RequestUpdateUserData to stand in for the Interaction Management RequestChangeproperties. It also uses the T-Library EventAttachedDataChanged to stand in for the Interaction Management EventAck.

#### **Unsuccessful Request**

In this phase, shown in Figure 147, Interaction Server finds that the request is invalid.




Figure 147: Unsuccessful

This phase uses the messages shown in Table 235.

Table 235: Messages in Unsuccessful

Message	Protocol
EventError	Interaction Management

# Place Interaction in Queue

In this model, shown in Figure 148, URS requests Interaction Server to place an interaction in a queue.

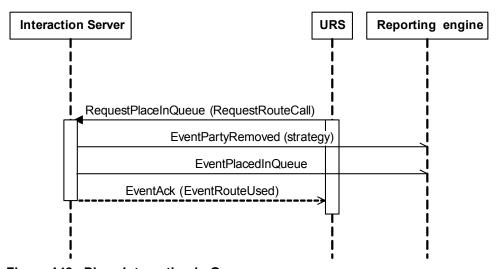


Figure 148: Place Interaction in Queue

**Note:** The agent application can also make the request to place an interaction in a queue. In that case the model would look the same, except that Interaction Server would simply send EventAck rather than EventRouteUsed.

This model uses the messages listed in Table 236.

Table 236: Messages in Place Interaction in Queue

Message	Protocol
EventPartyRemoved	Reporting
EventPlacedInQueue	Reporting
EventRouteUsed, used here in place of EventAck	T-Library

This model uses the following substitutions:

- T-Library EventRouteUsed stands in for Interaction Management EventAck.
- T-Library RequestRouteCall stands in for Interaction Management RequestPlaceInQueue.

## Place Interaction in Workbin

In this model, shown in Figure 149, URS asks Interaction Server to place an interaction in a workbin.

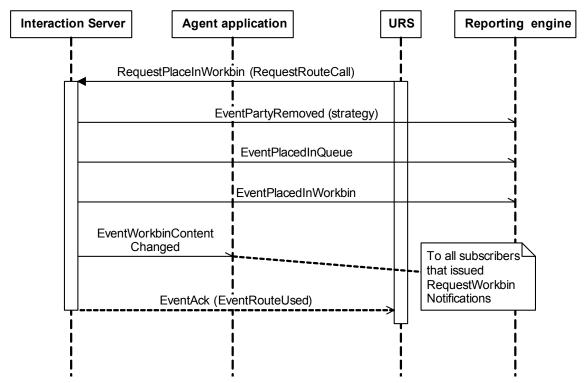


Figure 149: Place Interaction in Workbin

**Note:** The agent application can also make the request to place an interaction in a workbin. In that case the model would look the same, except that Interaction Server would simply send EventAck rather than EventRouteUsed.

This model uses the messages listed in Table 237.

Table 237: Messages in Place Interaction in Workbin

Message	Protocol
EventPartyRemoved	Reporting
EventPlacedInQueue	Reporting
EventPlacedInWorkbin	Reporting
EventRouteUsed, used here in place of EventAck	T-Library
EventWorkbinContentChanged	Interaction Management

This model uses the following substitutions:

 T-Library EventRouteUsed stands in for Interaction Management EventAck.

Genesys S

 T-Library RequestRouteCall stands in for Interaction Management RequestPlaceInWorkbin.

# **Deliver Interaction to Agent**

This set of models illustrates the following scenario:

- 1. URS asks Interaction Server to attempt to deliver an interaction to an agent.
- **2.** Then one of the following happens:
  - **a.** The agent accepts the interaction.
  - **b.** The agent rejects the interaction.
  - **c.** The agent fails to respond.

#### **URS Requests Delivery**

In this phase, shown in Figure 150, URS sends RequestRouteCall to Interaction Server, specifying the agent and place to receive the interaction. Then Interaction Server sends EventInvite to the agent application and sets a timer.

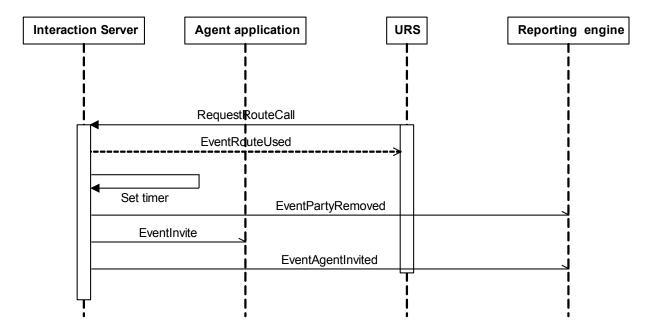


Figure 150: URS Requests Delivery

This phase uses the messages listed in Table 238.

Table 238: Messages in URS Requests Delivery

Message	Protocol
EventAgentInvited	Reporting
EventInvite	Interaction Management
EventPartyRemoved	Reporting
EventRouteUsed	T-Library

The second phase of this scenario can have one of the following three forms.

## **Agent Accepts Delivery**

In this version of the second phase, shown in Figure 151, the agent application accepts delivery of the interaction, and Interaction Server sends

EventRouteUsed to URS, informing it that its Deliver request has been filled.

Interaction Server also cancels the timer that it started in the previous phase.

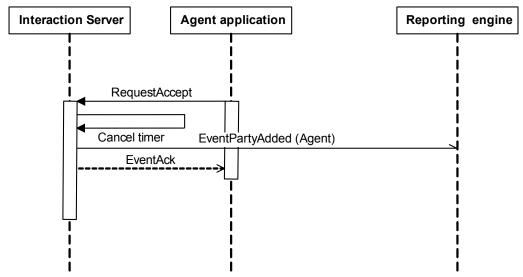


Figure 151: Agent Accepts Delivery

This phase uses the messages listed in Table 239.

Table 239: Messages in Agent Accepts Delivery

Message	Protocol
EventPartyAdded	Reporting

Genesys S

There are two ways that the delivery attempt can fail, shown in the next sections.

#### **Agent Rejects Delivery**

In this version of the second phase, rather than accepting the interaction as in Figure 151 on page 412, the agent rejects the interaction using RequestReject, as shown in Figure 152. Interaction Server cancels the timer, acknowledges RequestReject using EventAck, and informs URS of the situation with EventRouteUsed.

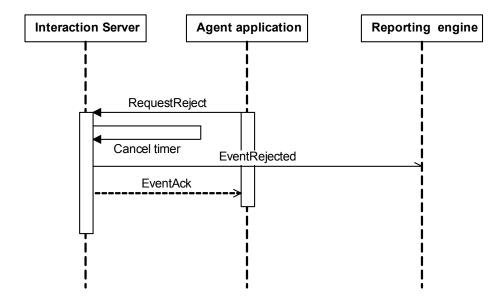


Figure 152: Agent Rejects Delivery

This phase uses the messages listed in Table 240.

Table 240: Messages in Agent Rejects Delivery

Message	Protocol
EventAck	Interaction Management
EventRejected	Reporting

#### **Agent Fails to Respond in Time**

In the first phase of this scenario, Interaction Server set a timer. In this version of the second phase, shown in Figure 153, the agent application does not respond within the time set and Interaction Server revokes the interaction.

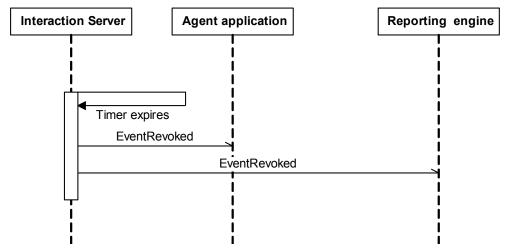


Figure 153: Time Limit Reached

This phase uses the messages listed in Table 241.

Table 241: Messages in Time Limit Reached

Message	Protocol
EventRevoked	Interaction Management

## **Agent Pulls Interaction**

This set of models illustrates the following scenario:

- 1. Agent application asks to pull an interaction:
  - **a.** From some place other than a workbin.
  - **b.** From a workbin.
- 2. Some processing activity occurs.
- **3.** Timeout: Processing activity stops (or never occurred).

#### **Agent Issues Pull Request**

This phase has two versions, depending on whether the interaction is to be pulled from a workbin or from some other location.

#### From Non-Workbin

In this version of the first phase, shown in Figure 154, the interaction is pulled from somewhere other than a workbin (most likely a queue). Notice that

Interaction Server

Agent application

Reporting engine

Check interaction

EventTakenFromQueue

| | EventPartyAdded

Interaction Server starts a timer, which continues running into the following phases.

Figure 154: Agent Pulls From Non-Workbin

Set timer

This phase uses the messages listed in Table 242.

EventPulledInteractions

Table 242: Messages in Agent Pulls From Non-Workbin

Message	Protocol
EventPartyAdded	Reporting
EventPulledInteractions	Interaction Management
EventTakenFromQueue	Reporting

#### From Workbin

In this version of the first phase, shown in Figure 155, the interaction is pulled from a workbin.

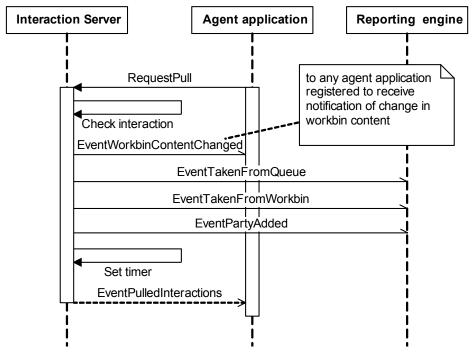


Figure 155: Agent Pulls Interaction From Workbin

This version uses the same messages as the previously-described version, plus two more. All are listed in Table 243.

Table 243: Messages in Agent Pulls From Workbin

Message	Protocol
EventPartyAdded	Reporting
EventPulledInteractions	Interaction Management
EventTakenFromQueue	Reporting
EventTakenFromWorkbin	Reporting
EventWorkbinContentChanged	Interaction Management

## **Processing Occurs**

In this phase, shown in Figure 156, Interaction Server resets its timer each time it receives a request from the agent application. The interaction remains with the agent as long as the agent continues to send requests.




Figure 156: Processing Occurs

This phase uses any request from the Interaction Management Protocol.

#### No Processing: Timeout

In this phase, shown in Figure 157, the timer expires and Interaction Server revokes the interaction.

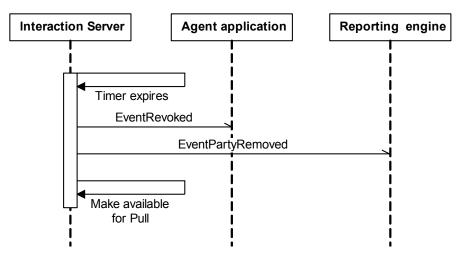


Figure 157: No Processing: Timeout

This phase uses the messages listed in Table 244.

Table 244: Messages in No Processing: Timeout

Message	Protocol
EventPartyRemoved	Reporting
EventRevoked	Interaction Management

#### **Transfer**

This set of models illustrates the following scenario:

- 1. One agent invites another to accept a transfer.
- **2.** One of the following happens:
  - **a.** The second agent accepts the invitation and the transfer completes.
  - **b.** The second agent rejects the invitation.
  - **c.** There is no response and the invitation times out.
  - **d.** Interaction Server finds that either the first agent application or the interaction is invalid.

#### **Invitation Issued**

In this phase, shown in Figure 158, Agent 1 asks Interaction Server to invite Agent 2 to accept a transfer.

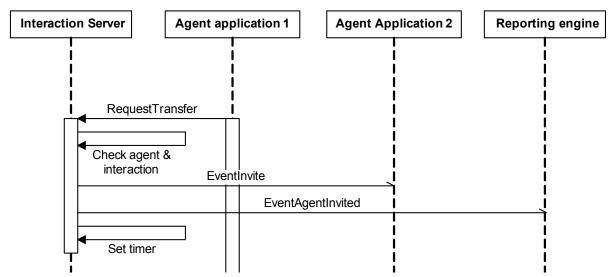


Figure 158: Transfer Invitation Issued

This phase uses the messages shown in listed in Table 245.

Table 245: Messages in Transfer Invitation Issued

Message	Protocol
EventAgentInvited	Reporting
EventInvite	Interaction Management

Genesys S

## **Invitation Accepted**

In this phase, shown in Figure 159, Agent 2 accepts the transfer.

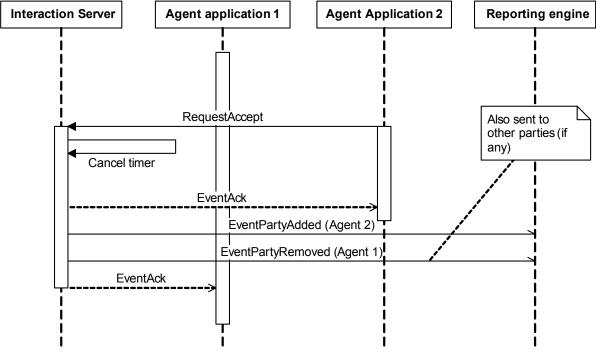


Figure 159: Transfer Invitation Accepted

This phase uses the messages shown in Table 246.

Table 246: Messages in Transfer Invitation Accepted

Message	Protocol
EventAck	Interaction Management
EventPartyAdded	Reporting
EventPartyRemoved	Reporting

#### **Invitation Rejected**

In this phase, shown in Figure 160, Agent 2 rejects the invitation.

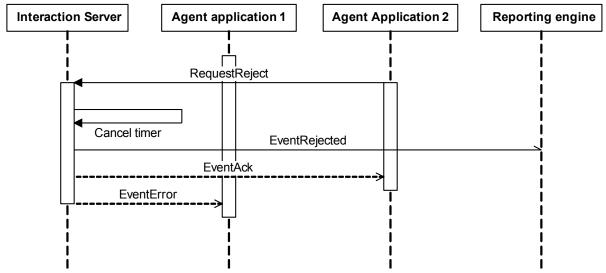


Figure 160: Transfer Invitation Rejected

This phase uses the messages shown in Table 247.

Table 247: Messages in Transfer Invitation Rejected

Message	Protocol
EventAck	Interaction Management
EventError	Interaction Management
EventRejected	Reporting

#### **Invitation Times Out**

In this phase, shown in Figure 161, Agent 2 does not respond within the timeout period, so Interaction Server revokes the invitation.

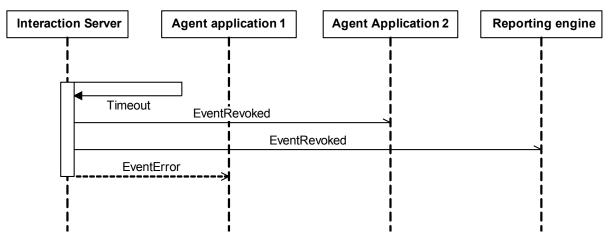


Figure 161: Transfer Invitation Times Out

Genesys S

This phase uses the messages shown in Table 248.

Table 248: Messages in Transfer Invitation Times Out

Message	Protocol
EventError	Interaction Management
EventRevoked	Interaction Management

#### Invitation Is Invalid

In this phase, shown in Figure 162, Interaction Server finds that either the agent or the interaction is not valid (for example, the agent is not registered with Interaction Server).

**Note:** This phase replaces, rather than follows, the initial phase "Invitation Issued" on page 418.




Figure 162: Transfer Invitation Is Invalid

This phase uses the messages shown in Table 249.

Table 249: Messages in Transfer Invitation Is Invalid

Message	Protocol
EventError	Interaction Management

## **Conference**

This set of models illustrates the following scenario:

1. One agent invites another to join a conference.

- **2.** One of the following happens:
  - **a.** The second agent accepts the invitation and joins the conference.
  - **b.** The second agent rejects the invitation.
  - **c.** There is no response and the invitation times out.
  - **d.** Interaction Server finds that either the first agent application or the interaction is invalid.

If the second agent accepts, the conference proceeds until:

**3.** The second agent then attempts to leave the conference, successfully or not.

#### **Invitation Issued**

In this phase, shown in Figure 163, Agent 1 invites Agent 2 to join a conference.

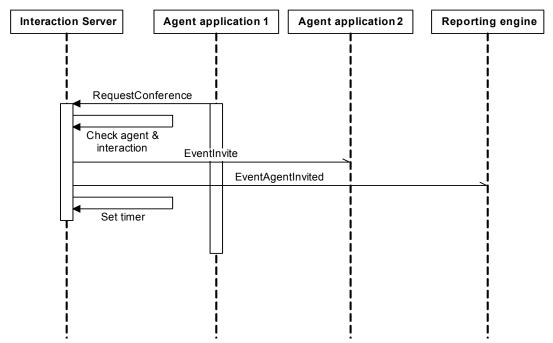


Figure 163: Conference Invitation Issued

This phase uses the messages shown in Table 250.

Table 250: Messages in Conference Invitation Issued

Message	Protocol
EventAgentInvited	Reporting
EventInvite	Interaction Management

Genesys 🥯

## **Invitation Accepted**

In this phase, shown in Figure 164, Agent 2 accepts the invitation and Interaction Server informs all parties to the interaction that Agent 2 has joined.

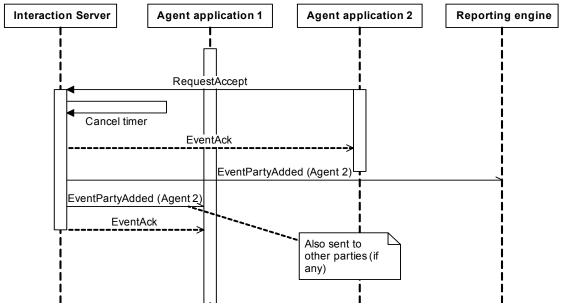


Figure 164: Conference Invitation Accepted

This phase uses the messages shown in Table 251.

Table 251: Messages in Conference Invitation Accepted

Message	Protocol
EventAck	Interaction Management
EventPartyAdded	Reporting and Interaction Management

## **Invitation Rejected**

In this phase, shown in Figure 165, Agent 2 rejects the invitation.

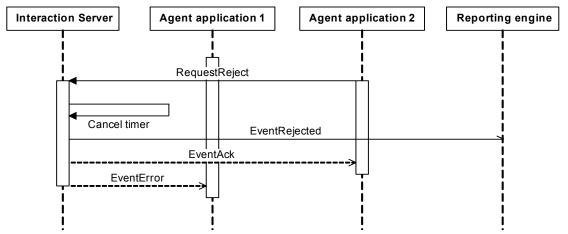


Figure 165: Conference Invitation Rejected

This phase uses the messages shown in Table 252.

Table 252: Messages in Conference Invitation Rejected

Message	Protocol
EventAck	Interaction Management
EventError	Interaction Management
EventRejected	Reporting

#### **Invitation Times Out**

In this phase, shown in Figure 166, Agent 2 does not respond within the timeout period, so Interaction Server revokes the invitation.

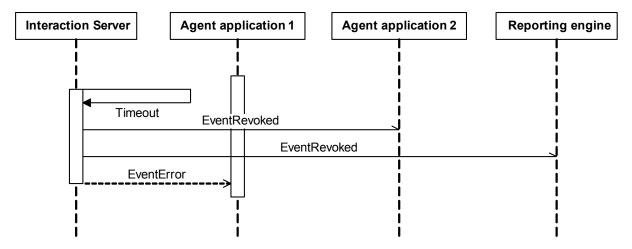


Figure 166: Conference Invitation Times Out

This phase uses the messages shown in Table 253.

**Table 253: Messages in Conference Invitation Time Out** 

Message	Protocol
EventError	Interaction Management
EventRevoked	Interaction Management

#### **Invitation Is Invalid**

In this phase, shown in Figure 167, Interaction Server finds that either the agent or the interaction is not valid (for example, the agent is not registered with Interaction Server).

**Note:** This phase replaces, rather than follows, the initial phase "Invitation Issued" on page 422.




Figure 167: Conference Invitation Is Invalid

This phase uses the messages shown in Table 254.

Table 254: Messages in Conference Invitation Is Invalid

Message	Protocol
EventError	Interaction Management

#### **Leave the Conference**

In this phase, shown in Figure 168, Agent 2 leaves the conference.

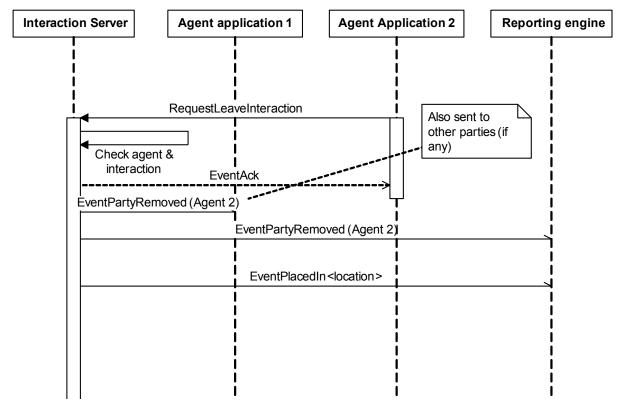


Figure 168: Leave the Conference

When the last party leaves the interaction, Interaction Server returns the interaction to its former location and informs the Reporting engine.

This phase uses the messages shown in Table 255.

**Table 255: Messages in Leave the Conference** 

Message	Protocol
EventAck	Interaction Management
EventPartyRemoved	Interaction Management

Table 255: Messages in Leave the Conference (Continued)

Message	Protocol
EventPartyRemoved	Reporting
EventPlacedInQueue	Reporting
EventPlacedInWorkbin	Reporting

#### Fail to Leave the Conference

In this phase, shown in Figure 169, Agent 2 attempts to leave the conference, but Interaction Server rejects the request.

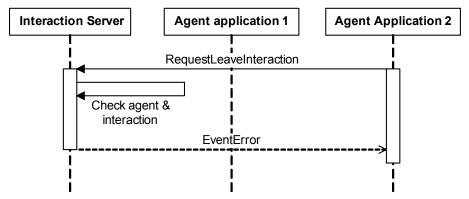


Figure 169: Fail to Leave the Conference

This phase uses the messages shown in Table 256.

Table 256: Messages in Fail to Leave the Conference

Message	Protocol
EventError	Interaction Management

## **Workbin Operations**

This set of models illustrates the following two ways that an agent application can interact with a workbin:

- Get content from the workbin
- Register to receive notification when the workbin's content changes.

#### **Agent Gets Workbin Content**

In this phase, shown in Figure 170, the agent application requests and receives data on the interactions that the workbin contains.

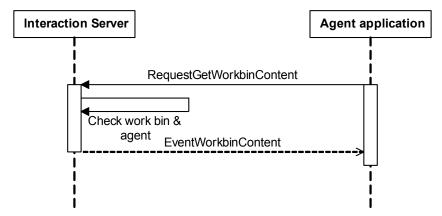


Figure 170: Agent Gets Workbin Content

This phase uses the messages shown in Table 257.

Table 257: Messages in Agent Gets Workbin Content

Message	Protocol
EventWorkbinContent	Interaction Management

#### **Agent Fails to Get Workbin Content**

In this phase, shown in Figure 171, Interaction Server rejects the agent's request for workbin data. This happens when either the agent or the workbin is not registered with Interaction Server.

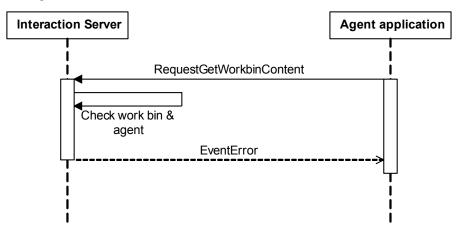


Figure 171: Agent Fails to Get Workbin Content

This phase uses the messages shown in Table 258.

Table 258: Messages in Agent Fails to Get Workbin Content

Message	Protocol
EventError	Interaction Management

#### **Agent Requests Workbin Notification**

In this phase, shown in Figure 172, the agent asks to be notified of all future changes in the contents of a specified workbin.

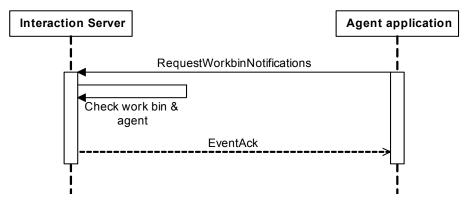


Figure 172: Agent Requests Workbin Notification

Interaction Server checks that both the workbin and the agent are registered with it.

- If either is unknown to Interaction Server, it returns EventError.
- If both are registered, Interaction returns EventAck to the agent.

This phase uses the messages shown in Table 259.

Table 259: Messages in Agent Requests Workbin Notification

Message	Protocol
EventAck	Interaction Management

#### **Agent Cancels Workbin Notifications**

In this phase, shown in Figure 173, the agent cancels its subscription for workbin notification.

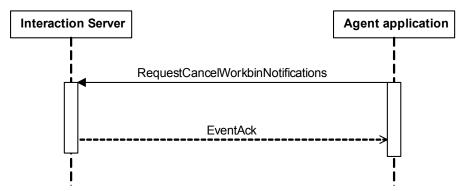


Figure 173: Agent Cancels Workbin Notifications

If either the workbin or the agent is unknown to Interaction Server, or if the agent has not subscribed for workbin notification, Interaction Server returns EventError.

This phase uses the messages shown in Table 260.

**Table 260: Messages in Agent Cancels Workbin Notifications** 

Message	Protocol
EventAck	Interaction Management

## **Snapshot Operations**

This set of models illustrates various operations on snapshots. A snapshot is a list of all of the interactions in the Interaction Server's database that meet specified conditions at a given time. The agent application requests a snapshot from Interaction Server and uses the results to populate the list of interactions that display on the Agent or Supervisor desktop. The operations that are illustrated in this section are:

- **1.** Take a snapshot
- **2.** Get snapshot interactions
- 3. Lock/unlock
- 4. Release snapshot

#### Take a Snapshot

In this phase, shown in Figure 174, the agent application defines a set of conditions and requests a snapshot of the interactions that meet the conditions.

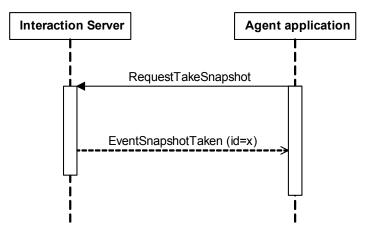


Figure 174: Take a Snapshot

This phase uses the messages shown in Table 261.

Table 261: Messages in Take a Snapshot

Message	Protocol
EventSnapshotTaken	Interaction Management

## **Get Snapshot Interactions**

In this phase, shown in Figure 175, the agent application requests the content of a previously taken snapshot; that is, information about the interactions that are included in the snapshot.

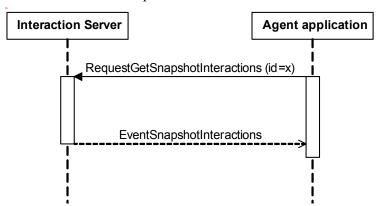


Figure 175: Get Snapshot Interactions

This phase uses the messages shown in Table 262.

**Table 262: Messages in Get Snapshot Interactions** 

Message	Protocol
EventSnaphotInteractions	Interaction Management

#### **Lock or Unlock Interactions**

In this phase, shown in Figure 176, an agent application asks Interaction Server to lock or unlock an interaction. Locked interactions are not visible to views and can not be pulled from queues by URS or an agent.

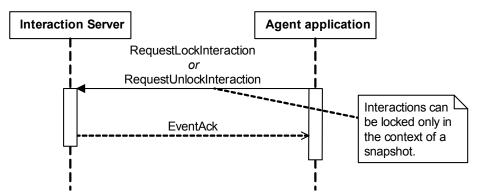


Figure 176: Lock or Unlock Interactions

This phase uses the messages shown in Table 263.

**Table 263: Messages in Lock or Unlock Interactions** 

Message	Protocol
EventAck	Interaction Management

#### **Release Snapshot**

In this phase, shown in Figure 177, an agent application asks Interaction Server to release a specified snapshot; that is, to unlock any interactions that were locked in the context of this snapshot.

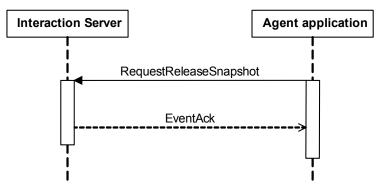


Figure 177: Release Snapshot

This phase uses the messages shown in Table 264.

Table 264: Messages in Release Snapshot

Message	Protocol
EventAck	Interaction Management

## **Intrusion**

Intrusion is like a conference, except that a conference is initiated by an entity that is already a party to the interaction, while intrusion is initiated by an entity that is not a party to the interaction. Therefore intrusion may also be described as an externally-initiated conference. This set of models illustrates the following scenario:

- **1.** While Agent 1 is processing an interaction, Agent 2 asks to join in a conference.
- **2.** One of the following happens:
  - **a.** The conference is set up and proceeds.
  - **b.** Agent 2 declines the conference.
  - **c.** The request times out.
  - **d.** Interaction Server rejects Agent 2's request.

## Intrusion Requested

In this phase, shown in Figure 178, Agent 2 asks to join an interaction that is already being processed by Agent 1. Interaction Server responds by sending EventInvite to Agent 2.

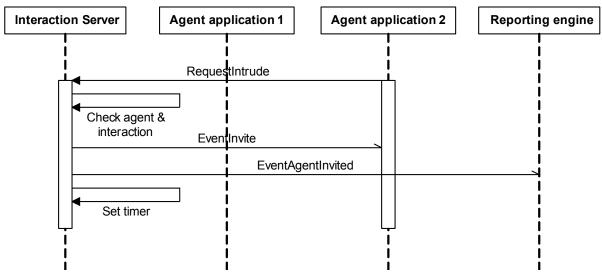


Figure 178: Intrusion Requested

This phase uses the messages shown in Table 265.

Table 265: Messages in Intrusion Requested

Message	Protocol
EventAgentInvited	Reporting
EventInvite	Interaction Management

#### **Intrusion Accepted**

In this phase, shown in Figure 179, Agent 2 accepts the invitation to join the interaction. Interaction Server responds with two instances of EventAck: the first one acknowledges the agent's RequestAccept from this phase, the other acknowledges the agent's RequestIntrude from the preceding phase.

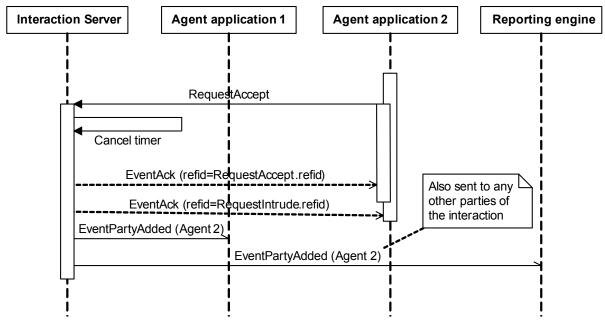


Figure 179: Intrusion Accepted

Interaction Server then reports the addition of Agent 2 to the interaction by sending EventPartyAdded to Agent 1, the reporting engine, and any other parties to the interaction.

This phase uses the messages shown in Table 266.

Table 266: Messages in Intrusion Accepted

Message	Protocol
EventAck	Interaction Management
EventPartyAdded	Reporting and Interaction Management

#### **Intrusion Rejected by Agent**

In this phase, shown in Figure 180, Agent 2 rejects the invitation to join the interaction. Interaction Server responds with EventAck, replying to RequestReject from this phase, and with EventError, replying to RequestIntrude from the previous "Intrusion Requested" on page 433.

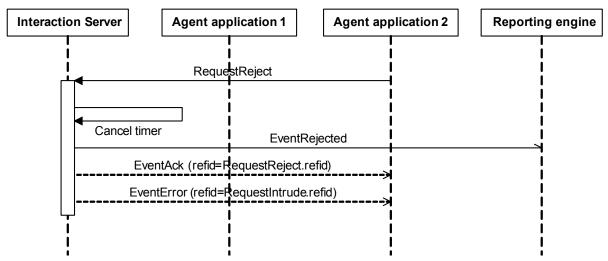


Figure 180: Intrusion Rejected by Agent

This phase uses the messages shown in Table 267.

Table 267: Messages in Rejected by Agent

Message	Protocol
EventAck	Interaction Management
EventError	Interaction Management
EventRejected	Reporting

## **Intrusion Rejected by Interaction Server**

In this phase, shown in Figure 181, Interaction Server finds that either the agent or the interaction are not registered, and so rejects Agent 2's request for intrusion.

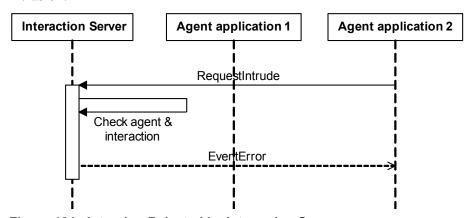


Figure 181: Intrusion Rejected by Interaction Server

This phase uses the messages shown in Table 268.

Table 268: Messages in Intrusion Rejected by Interaction Server

Message	Protocol
EventError	Interaction Management

#### **Intrusion Times Out**

In this phase, shown in Figure 182, the timer that Interaction Server started in the first phase ("Intrusion Requested" on page 433) expires. Interaction Server then sends EventRevoked to Agent 2 and to the reporting engine. It also sends EventError as a response to Agent 2's original RequestIntrude in the first phase.

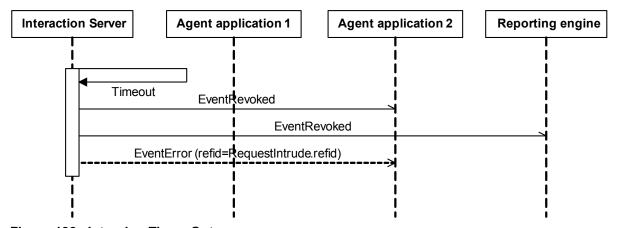


Figure 182: Intrusion Times Out

This phase uses the messages shown in Table 269.

**Table 269: Messages in Intrusion Times Out** 

Message	Protocol
EventError	Interaction Management
EventRevoked	Interaction Management

## Login/Logout

This set of models illustrates a scenario which follows "Successful Registration" on page 394:

1. After connecting and registering, the agent application logs in to all available Interaction Servers.

2. The agent application logs out from the Interaction Servers.

#### **Agent Logs In**

In this phase, shown in Figure 183,

- 1. The agent application sends RequestAgentLogin to the primary Interaction Server.
- 2. The primary Interaction Server sends EventAgentLogin to the reporting engine, which responds with EventCurrentAgentStatus.
- **3.** The agent applications sends RequestAgentAvailable to all other Interaction Servers that are running.
- **4.** The primary Interaction Server relays EventCurrentAgentStatus to the agent application.

Note that the agent application uses different events to log in to primary versus secondary Interaction Servers.

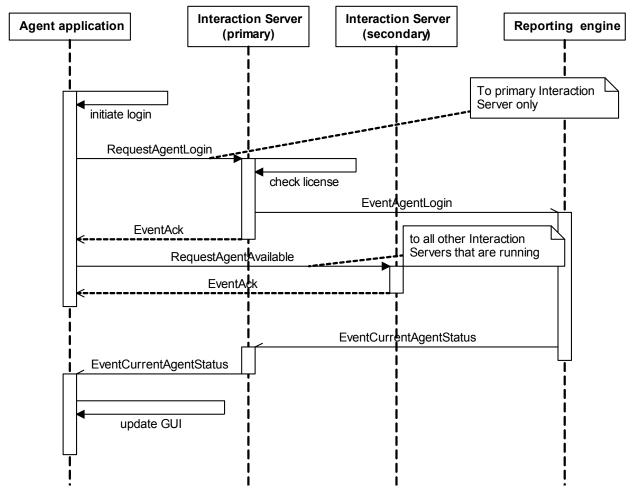


Figure 183: Agent Logs In

This phase uses the messages shown in Table 270.

Table 270: Messages in Agent Logs In

Message	Protocol
EventAck	Interaction Management
EventAgentLogin	Reporting
EventCurrentAgentStatus	Reporting

## **Agent Logs Out**

In this phase, shown in Figure 184, the agent application sends RequestAgentLogout to the primary Interaction Server, which relays that information to the reporting engine. After the agent application receives EventAck from this Interaction Server, it sends RequestAgentNotAvailable to all secondary Interaction Servers.

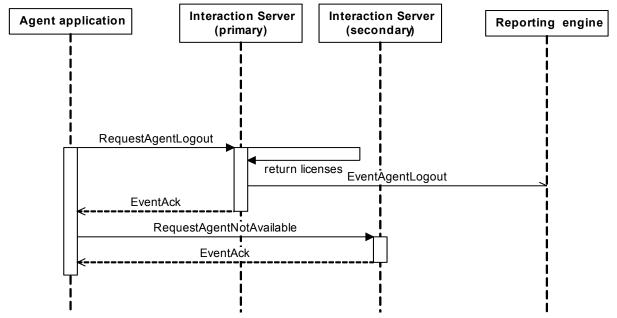


Figure 184: Agent Logs Out

This phase uses the messages shown in Table 271.

Table 271: Messages in Agent Logs Out

Message	Protocol
EventAck	Interaction Management
EventAgentLogout	Reporting

## **Reporting Engine Connects**

This model illustrates the following scenario:

- 1. The reporting engine connects with Interaction Server, then uses
  RequestStartPlaceAgentReportingAll to request data on all agents that are
  logged in to this Interaction Server.
- 2. Interaction Server uses EventPlaceAgentState to inform the reporting engine of the state (media state, interactions being handled) of all agents that are logged in with this Interaction Server.
- 3. The reporting engine (in this case, Stat Server) combines this state information with any applicable capacity rules to calculate the agent's status. It relays the status information to Interaction Server using EventCurrentAgentStatus. Interaction Server passes the same event to the agent application, which displays the status information in its UI.

**Note:** In this scenario the reporting engine must be Stat Server. In the current release, Stat Server is the only component that calculates capacity.

**4.** If there are multiple Interaction Servers, the reporting engine then connects with each one in turn and repeats Steps 2 and 3 with each.

Note that this model distinguishes between *state* and *status* of an agent, as follows:

- State indicates the media that this agent is ready to use and the interactions that the agent is currently handling.
- Status is the output of an Agent Capacity Rule, which Stat Server calculates using the agent's state as part of the input.

This model, which is not further divided into phases, is shown in Figure 185.

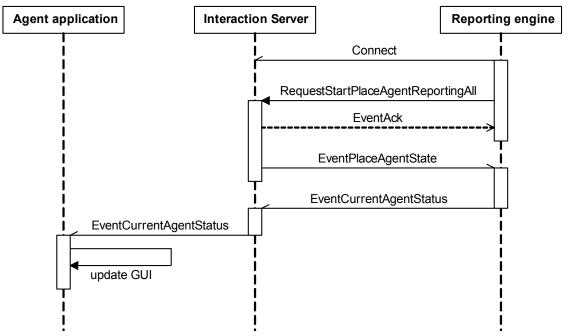


Figure 185: Reporting Engine Connects

This model uses the messages shown in Table 272.

**Table 272: Messages in Reporting Engine Connects** 

Message	Protocol
EventAck	Interaction Management
EventCurrentAgentStatus	Reporting
EventPlaceAgentState	Reporting

## **Disconnection and Failover**

This set of models illustrates the following scenarios:

- The agent application disconnects from Interaction Server(s).
- The Interaction Server disconnects from agent application and reporting engine. Then the following happens:
  - The agent application connects to secondary Interaction Server, which becomes primary.
  - The former primary Interaction Server restarts.

## **Agent Disconnects**

In this phase, shown in Figure 186, the agent application disconnects from Interaction Server. This may due to a failure or to normal shutdown.

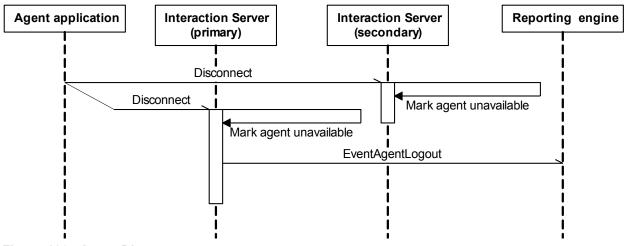


Figure 186: Agent Disconnects

The primary Interaction Server sends EventAgentLogout only if the agent was known to be logged in.

This phase uses the message shown in Table 273.

**Table 273: Messages in Agent Disconnects** 

Message	Protocol
EventAgentLogout	Reporting

#### **Interaction Server Disconnects**

In this phase, shown in Figure 187:

- 1. The primary Interaction Server disconnects from the agent application and the reporting engine. This may due to a failure or to normal shutdown. The reporting engine sets the state of each agent logged in with this Interaction Server to not logged in.
- 2. The agent application connects to the secondary Interaction Server and registers with it. Registration is not shown here; see "Registration" on page 394 for a description.
- **3.** The agent application logs in to the secondary Interaction Server.
- **4.** The secondary Interaction Server responds with EventAck, thereby becoming the new primary Interaction Server.

Genesys **S** 

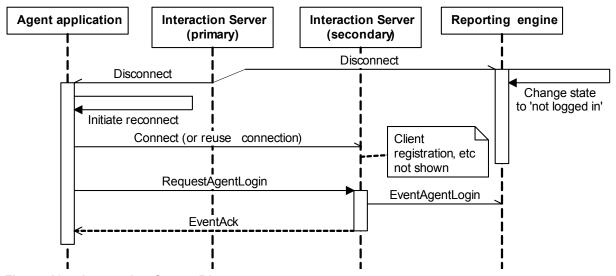


Figure 187: Interaction Server Disconnects

This phase uses the messages shown in Table 274.

**Table 274: Messages in Interaction Server Disconnects** 

Message	Protocol
EventAck	Interaction Management
EventAgentLogin	Reporting

#### **Interaction Server Restarts**

In this phase, shown in Figure 188:

- 1. The original primary Interaction Server restarts.
- 2. The agent application connects to it and registers (registration is not shown here; see "Registration" on page 394)
- 3. The agent application logs in to the Interaction Server using RequestAgentAvailable, upon which this Interaction Server becomes secondary.

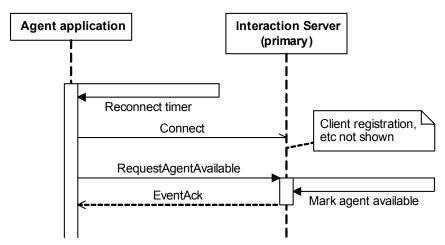


Figure 188: Interaction Server Restarts

This phase uses the messages shown in Table 275.

**Table 275: Messages in Interaction Server Restarts** 

Message	Protocol
EventAck	Interaction Management

## **Invoke Autoresponse**

This set of models illustrates the following scenario:

- 1. URS, triggered by an Autoresponse strategy object, generates a request for E-mail Server Java to generate a new autoresponse interaction. It sends this request to Interaction Server using Request3rdServer.
- 2. Interaction Server relays the request to E-mail Server Java using the same Request3rdServer. It also relays the content of the request to the reporting engine using EventExternalServiceRequested.
- 3. E-mail Server Java generates a new Autoresponse interaction and submits it to Interaction Server using RequestSubmit. When Interaction Server acknowledges the submission, E-mail Server Java sends Event3rdServerResponse, which Interaction Server relays to URS. Interaction Server also relays the content of that event to the reporting engine using EventExternalServiceResponded.

This model, which is not further divided into phases, is shown in Figure 189.

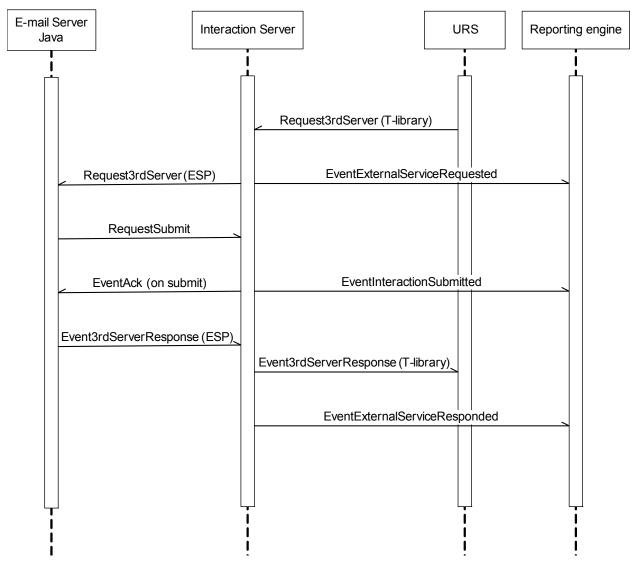


Figure 189: Invoke Autoresponse

This phase uses the messages shown in Table 276.

**Table 276: Messages in Invoke Autoresponse** 

Message	Protocol
Event3rdServerResponse	ESP
EventAck	Interaction Management
EventExternalServiceRequested	Reporting
EventExternalServiceResponded	Reporting
EventInteractionSubmitted	Reporting

In this scenario, URS uses Interaction Server as an intermediary to communicate with E-mail Server Java, which in this case is called a *third-party server*. Another example of such a third-party server is Classification Server, with which URS must similarly communicate when a strategy includes a Classify object. To relay these messages to third-party servers, Interaction Server uses the T-Library messages RequestPrivateService and EventPrivateInfo, with special content in their extensions and user\_data attributes. With that special content, these messages make up a small *External Services Protocol* (ESP), as shown in Table 277.

**Table 277: ESP Messages** 

T-Library Message	ESP Message	Description
EventPrivateInfo	Event3rdServerResponse	Returns results of third- party server's operation
	Event3rdServerFault	Contains information about failure of third-party server's operation

ESP is not further described in this manual. However, much of the relevant content of Request3rdServer and Event3rdServerResponse is repeated in the attributes of the reporting protocol events EventExternalServiceRequested and EventExternalServiceResponded.

Components that understand ESP are called *ESP servers*. Classification Server is an ESP server. E-mail Server Java functions both as a media server (processing Interaction Management Protocol messages) and as an ESP server, processing ESP messages. You can also create custom ESP servers using the Genesys Open Media Platform SDK.



#### Chapter



## **IVR Call Flows**

This chapter includes call flow diagrams that show all of the commonly encountered request-response sequences needed to create your IVR driver client. This chapter contains these sections:

- Overview, page 447
- Call Routing Call Flow, page 448
- Route Failed, page 449
- Reroute, page 450
- Call Treatment, page 451
- Call Treatment Failed, page 452
- Call Treatment Interrupted, page 453
- MakeCall Call Flow, page 454
- MakeCall (Busy), page 454
- Conference Call Flow Diagrams, page 454
- Transfer Call Flow Diagrams, page 461

## **Overview**

This chapter consists of a series of call flow diagrams. It is intended to be used as a reference. The remaining call flow diagrams illustrate the request-response sequences for additional interaction types.

You can find complete lists of the Conference and Transfer call flow diagrams under "Conference Call Flow Diagrams" on page 454 and "Transfer Call Flow Diagrams" on page 461.

# **Call Routing Call Flow**

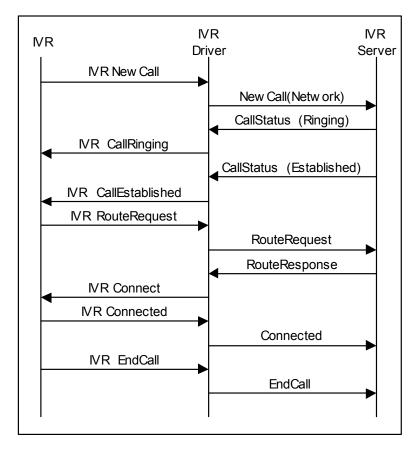


Figure 190: Call Routing Call Flow

## **Route Failed**

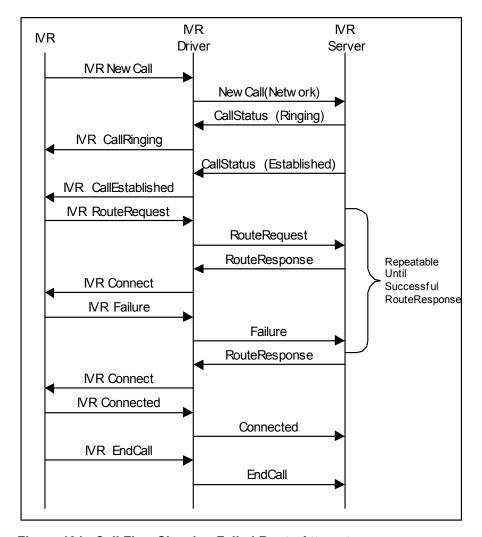


Figure 191: Call Flow Showing Failed Route Attempt

## Reroute

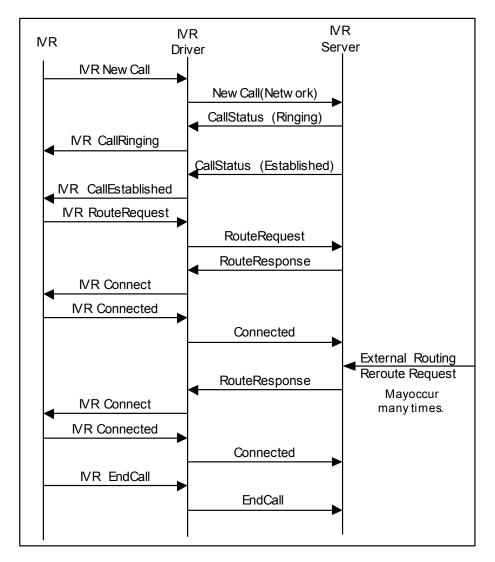


Figure 192: Rerouted Call

The external routing request is delivered from URS by the IVR Server.

## **Call Treatment**

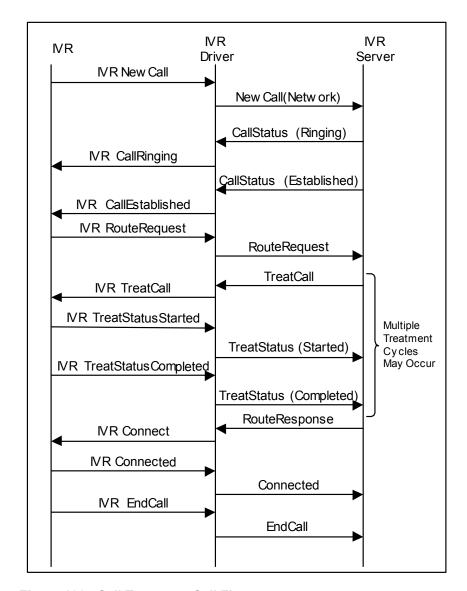


Figure 193: Call Treatment Call Flow

## **Call Treatment Failed**

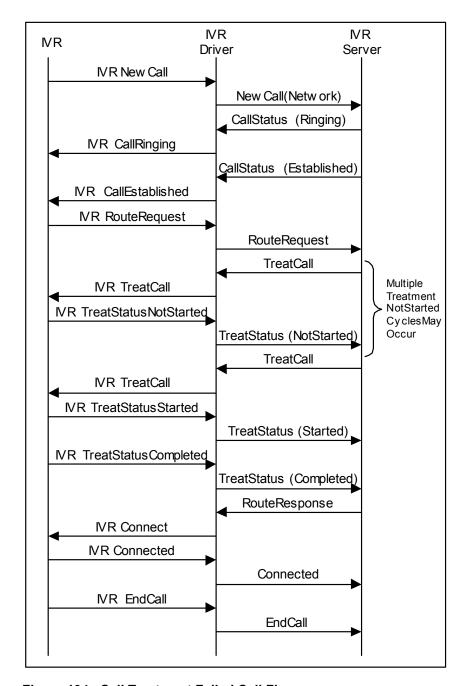
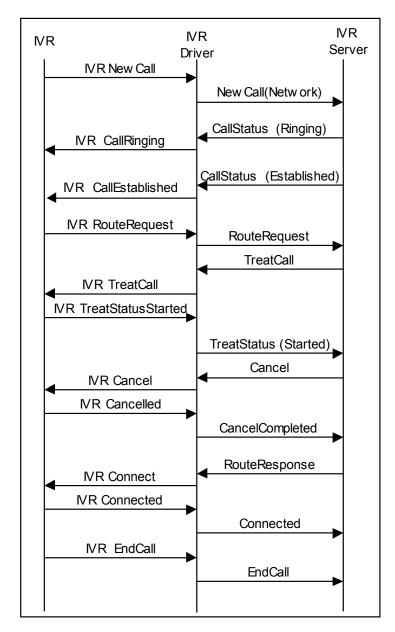


Figure 194: Call Treatment Failed Call Flow

## **Call Treatment Interrupted**



**Figure 195: Interrupted Call Treatment** 

The command to cancel the call treatment is forwarded from the Genesys Framework by IVR Server.

## **MakeCall Call Flow**

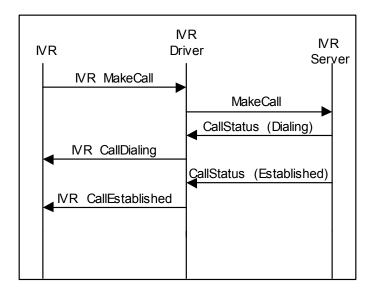


Figure 196: MakeCall Operation

# MakeCall (Busy)

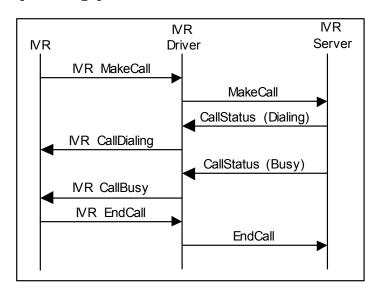


Figure 197: MakeCall(Busy) Call Flow

# **Conference Call Flow Diagrams**

The following call flow diagrams illustrate several scenarios involving conferenced calls.

- One-Step Conference, page 455
- One-Step Conference, Scenario 2, page 456
- Conference Consult Call, page 457
- Conference Consult Call, Scenario 2, page 458
- Conference Consult Call (Busy), page 459
- Conference Consult Call (Failed), page 460

## **One-Step Conference**

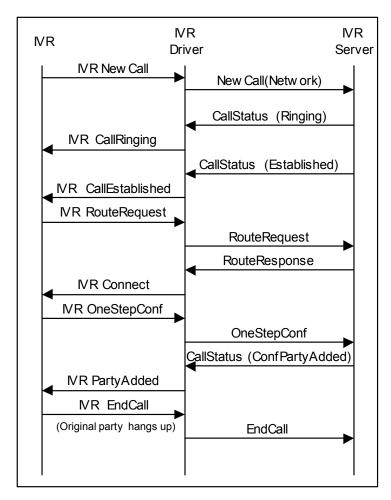


Figure 198: Call Flow for a One-Step Conference

If a Callerror occurs, IVR Server automatically returns you to the same status as before the conference call was started. This means that the original call is retrieved without any input from the IVR.

## **One-Step Conference, Scenario 2**

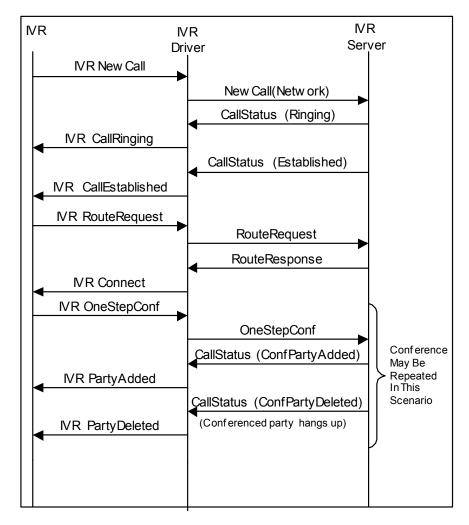


Figure 199: One-Step Conference with Alternative Disconnect Scenario

#### **Conference Consult Call**

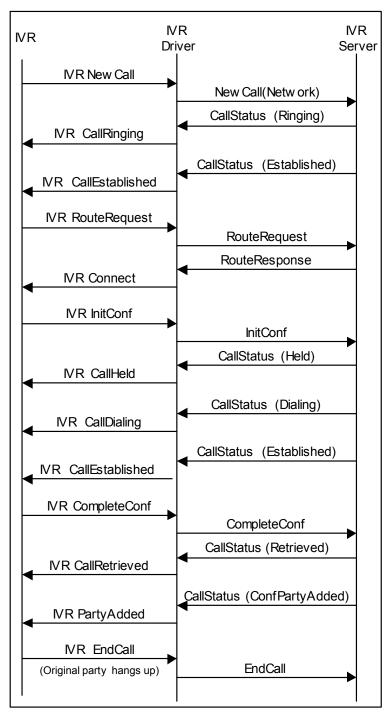


Figure 200: Call Flow for Conference Consult Call

## **Conference Consult Call, Scenario 2**

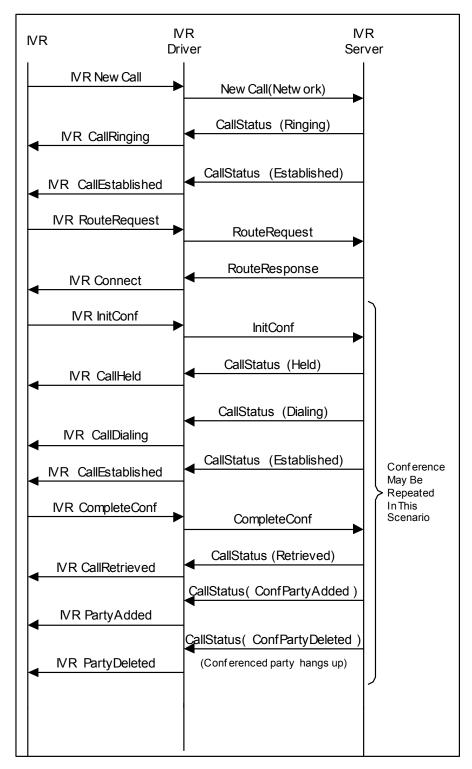


Figure 201: Conference Consult Call Alternative Scenario

## **Conference Consult Call (Busy)**

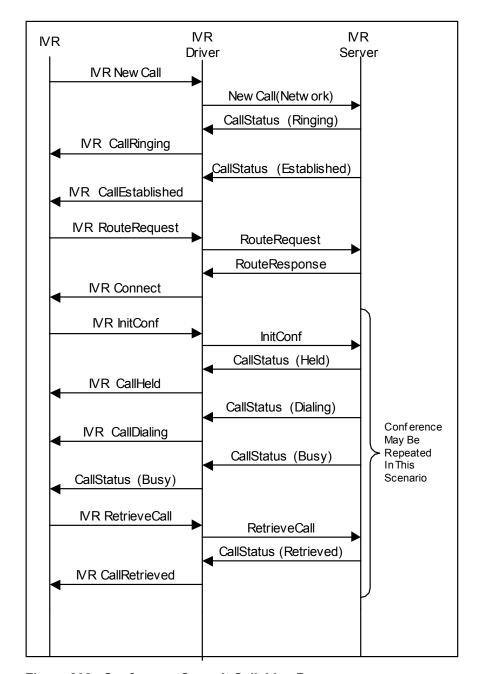


Figure 202: Conference Consult Call, Line Busy

A Busy response is not considered an error. When the party which is to be conferenced with the original caller is busy, the IVR driver must send a RetrieveCall message to retrieve the original call. Compare this to "Conference Consult Call (Failed)" on page 460.

## **Conference Consult Call (Failed)**

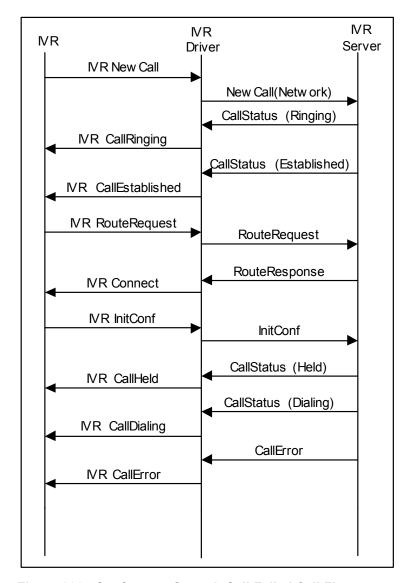


Figure 203: Conference Consult Call Failed Call Flow

If a Callerror occurs, IVR Server automatically returns you to the same status as before the conference call was started. This means that the second call is terminated and the original call is retrieved without any input from the IVR.

**Note:** If the IVR tries to retrieve the original call after a CallError message, the IVR will receive another error message because the original call has already been taken off hold.

Genesys S

## **Transfer Call Flow Diagrams**

The following call flow diagrams illustrate several scenarios involving transferring calls.

- Transfer to Remote Site, page 461
- Single-Step Transfer, page 462
- Transfer Consult Call, page 463
- Transfer Consult Call (Busy), page 464
- Transfer Consult Call (Failed), page 465

#### **Transfer to Remote Site**

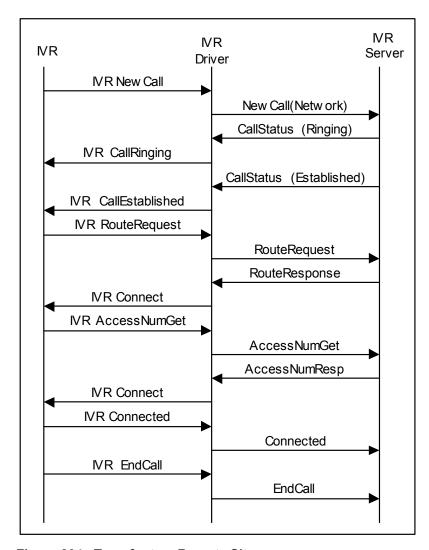


Figure 204: Transfer to a Remote Site

## **Single-Step Transfer**

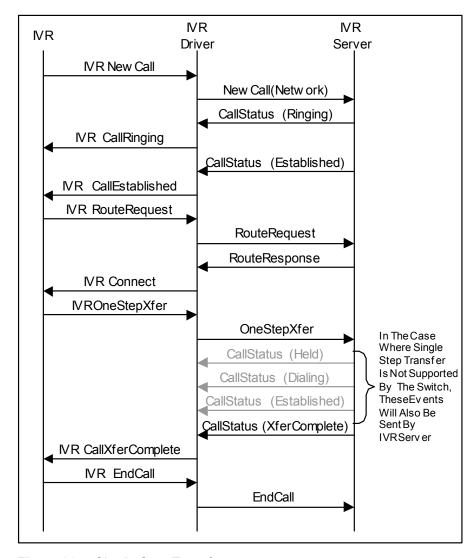


Figure 205: Single-Step Transfer

If a CallError occurs, IVR Server automatically returns you to the same status as before the transfer was started. This means that the original call is retrieved without any input from the IVR.

#### **Transfer Consult Call**

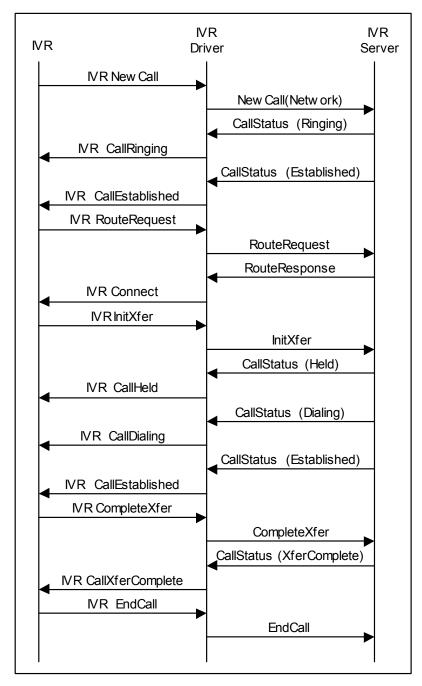


Figure 206: Call Flow for a Transfer Consult Call

## **Transfer Consult Call (Busy)**

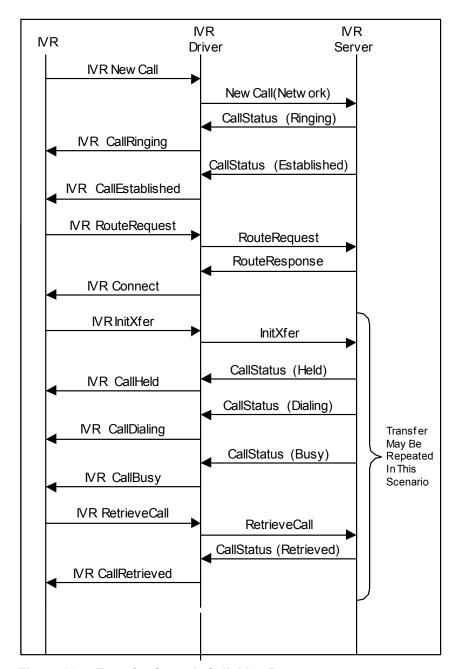


Figure 207: Transfer Consult Call, Line Busy

A Busy response is not considered an error. When the party to which the original caller is to be transferred is busy, the IVR driver must send a RetrieveCall message to retrieve the original call. Compare this to "Transfer Consult Call (Failed)" on page 465.

## **Transfer Consult Call (Failed)**

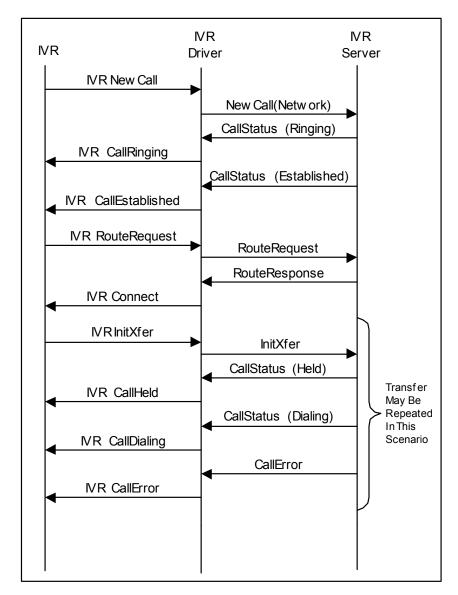


Figure 208: Transfer of Consult Call Failed

If a Callerror occurs, IVR Server automatically returns you to the same status as before the call transfer was started. This means that the second call is terminated and the original call is retrieved without any input from the IVR.

**Note:** If the IVR tries to retrieve the original call after a CallError message, the IVR will receive another error message because the original call has already been taken off hold.



#### **Supplements**

# Related Documentation Resources

The following resources provide additional information that is relevant to this software. Consult these additional resources, as necessary.

#### **Universal SDK**

Generally, the Universal SDK documentation, which includes Platform, Interaction, and IVR SDKs, is the most pertinent related set of documents for this *Reference*. All SDK documentation is available from the Genesys Developer Portal, the Genesys DevZone (<a href="http://devzone.genesyslab.com">http://devzone.genesyslab.com</a>).

In particular, consult these resources as necessary:

- Platform SDK documentation
  - Platform SDK 8.x Developer's Guide, which provides detailed information on how to develop applications of all types using a given Platform SDK.
  - The *Platform SDK 8.x API Reference* for the particular SDK you might be using, which provides the authoritative information on methods and functions for each SDK.
  - The *Platform SDK 8.x Application Block Guide* for any given application block. Each *Guide* explains how to use the application block and documents all code used in the application block itself. (Application blocks are production-quality available code.)
  - Platform SDK 8.x Code Examples, which offer illustrative ways to begin using Platform SDKs. These code examples are fully functioning software applications, but are for educational purposes only and are not supported.
- Interaction SDK documentation
  - Interaction SDK 8.x Developer's Guides, which provide detailed information on how to develop applications of all types using a given Interaction SDK.

- The *Interaction SDK 8.x API Reference* for the particular SDK you might be using, which provides the authoritative information on methods and functions for each SDK.
- The *Interaction SDK 8.x Application Block Guide* for any collection of application blocks. Each *Guide* explains how to use the application blocks and documents all code used in the application block itself. (Application blocks are production-quality available code.)
- Interaction SDK 8.x Code Examples, which offer illustrative ways to begin using Platform SDKs. These code examples are fully functioning software applications, but are for educational purposes only and are not supported.
- IVR SDK documentation
  - *IVR SDK 8.x C* and *XML Developer's Guides*, which provide detailed information on how to develop custom applications for use with IVR Server.
  - The *IVR SDK 8.x C API Reference*, which provides the authoritative information on functions for that SDK.
- The *Deployment Guides* for the underlying Genesys servers with which you intend to integrate. For instance, be sure to check the *Framework 8.x SIP Server Deployment Guide* if you plan on using the Voice Platform SDK and the SIP Endpoint Application Block. In particular, the Genesys Multimedia documentation contains the detailed information you need for understanding the underlying servers that handle non-voice interactions (Interaction Server).

#### Genesys

468

- The Genesys Technical Publications Glossary, which ships on the Genesys
  Documentation Library DVD and provides a comprehensive list of the
  Genesys and computer-telephony integration (CTI) terminology and
  acronyms that are used in this document.
- The Genesys Migration Guide, which ships on the Genesys Documentation Library DVD and provides documented migration strategies for Genesys product releases. Contact Genesys Technical Support, for more information.
- Release Notes and Product Advisories for this product, which are available
  on the Genesys Technical Support website at
  <a href="http://genesyslab.com/support">http://genesyslab.com/support</a>.

Information about supported hardware and third-party software is available on the Genesys Technical Support website in the following documents:

- Genesys Supported Operating Environment Reference Manual
- Genesys Supported Media Interfaces Reference Manual

Genesys S

Consult the following additional resources, as necessary:

- The *Genesys Hardware Sizing Guide*, which provides information about Genesys hardware sizing guidelines for the Genesys 7.x and 8.x releases.
- The *Genesys Interoperability Guide*, which provides information about the compatibility of Genesys products with various Configuration Layer Environments; Interoperability of Reporting Templates and Solutions; and *Gplus* Adapters Interoperability.
- The *Genesys Licensing Guide*, which introduces you to the concepts, terminology, and procedures that are relevant to the Genesys licensing system.
- The *Genesys Database Sizing Estimator Worksheets*, which provides a range of expected database sizes for various Genesys products.

For additional system-wide planning tools and information, see the release-specific listings of System Level Documents on the Genesys Technical Support website, accessible from the <a href="mailto:system\_level\_documents">system\_level\_documents</a> by <a href="mailto:release">release</a> tab in the Knowledge Base Browse Documents Section.

Genesys product documentation is available on the:

- Genesys Technical Support website at <a href="http://genesyslab.com/support">http://genesyslab.com/support</a>.
- Genesys Documentation Library DVD, which you can order by e-mail from Genesys Order Management at <a href="mailto:orderman@genesyslab.com">orderman@genesyslab.com</a>.

## **Document Conventions**

This document uses certain stylistic and typographical conventions—introduced here—that serve as shorthands for particular kinds of information

#### **Document Version Number**

A version number appears at the bottom of the inside front cover of this document. Version numbers change as new information is added to this document. The following is a sample version number:

80fr\_ref\_06-2008\_v8.0.001.00

You will need this number when you are talking with Genesys Technical Support about this product.

#### **Screen Captures Used in This Document**

Screen captures from the product graphical user interface (GUI), as used in this document, may sometimes contain minor spelling, capitalization, or grammatical errors. The text that accompanies and explains the screen captures corrects such errors *except* when such a correction would prevent you from installing, configuring, or successfully using the product. For example, if the name of an option contains a usage error, the name would be presented exactly as it appears in the product GUI; the error would not be corrected in any accompanying text.

### **Type Styles**

Table 278 describes and illustrates the type conventions that are used in this document.



Table 278: Type Styles

Type Style	Used For	Examples
Italic	<ul> <li>Document titles</li> <li>Emphasis</li> <li>Definitions of (or first references to) unfamiliar terms</li> <li>Mathematical variables</li> <li>Also used to indicate placeholder text within code samples or commands, in the special case where angle brackets are a required part of the syntax (see the note about angle brackets on page 471).</li> </ul>	Please consult the <i>Genesys Migration Guide</i> for more information.  Do <i>not</i> use this value for this option.  A <i>customary and usual</i> practice is one that is widely accepted and used within a particular industry or profession.  The formula, $x + 1 = 7$ where $x$ stands for
Monospace font (Looks like teletype or typewriter text)	<ul> <li>All programming identifiers and GUI elements. This convention includes:</li> <li>The <i>names</i> of directories, files, folders, configuration objects, paths, scripts, dialog boxes, options, fields, text and list boxes, operational modes, all buttons (including radio buttons), check boxes, commands, tabs, CTI events, and error messages.</li> <li>The values of options.</li> <li>Logical arguments and command syntax.</li> <li>Code samples.</li> <li>Also used for any text that users must manually enter during a configuration or installation procedure, or on a command line.</li> </ul>	Select the Show variables on screen check box.  In the Operand text box, enter your formula.  Click OK to exit the Properties dialog box.  T-Server distributes the error messages in EventError events.  If you select true for the inbound-bsns-calls option, all established inbound calls on a local agent are considered business calls.  Enter exit on the command line.
Square brackets ([ ])	A particular parameter or value that is optional within a logical argument, a command, or some programming syntax. That is, the presence of the parameter or value is not required to resolve the argument, command, or block of code. The user decides whether to include this optional information.	smcp_server -host [/flags]
Angle brackets (<>)	A placeholder for a value that the user must specify. This might be a DN or a port number that is specific to your enterprise.  Note: In some cases, angle brackets are required characters in code syntax (for example, in XML schemas). In these cases, italic text is used for placeholder values.	smcp_server -host ⟨confighost⟩





# Index

Symbols	EventForwardCancel 95
	EventForwardSet
[] (square brackets)	EventListenDisconnected
< > (angle brackets)	EventListenReconnected 104
	EventMessageWaitingOff
A	EventMessageWaitingOn 106
A	EventMonitoringCancelled 97
AccessNumber	EventMonitoringNextCall 96
event attribute	EventMuteOff
AccessNumResp	EventMuteOn
Agent After Call Work	EventOffHook
Agent Busy AfterCallWork	EventOnHook
Agent Busy NotReady	EventQueueLogout 84
Agent Busy Ready	list
Agent Not Ready	Alternate Call Service
Agent Null	Alternate Call Service with Transfer
Agent Ready	Completion
Agent states	Alternate-Call Service
Agent After Call Work	angle brackets 471
Agent Busy AfterCallWork	ANI
Agent Busy NotReady	event attribute
Agent Busy Ready	Attaching/Updating User Data
Agent Not Ready	to Call by Third Party
Agent Null	to Internal Call
Agent Ready	attribute type
description	audience
Agent Subtype	defining
AgentID	Autoresponse
event attribute	
agent-status & DN events 81–108	В
EventAgentAfterCallWork	B
EventAgentIdleReasonSet	Blind Conference
EventAgentLogin	brackets
EventAgentLogout	angle
EventAgentNotReady	square
EventAgentReady	Bridged Appearance for Hold/Retrieve 334
EventDNBackInService	Bridged Appearance
EventDNDOff	from an Outbound Call 331
EventDNDOn	Bridged Appearance
EventDNOutOfService 90	with an Internal/Inbound Call 328

C	Network T-Server Call Flows 379
and (disfinition)	Outbound Call to a Busy Destination 310
call (definition)	Predictive Call
Call Established for Call On Hold	Predictive Call (Connected to a Device
Call Forwarding (on No Answer)	Specified in Extensions)
Call Models	Reconnect-Call Service
Alternate-Call Service	Redirect-Call Service
Attaching/Updating User Data	Rejected Call
to Call by Third Party 308, 307	Release from Conference
Blind Conference	Release Phase
Bridged Appearance	Service Observing
for Hold/Retrieve	for Agent-Initiated Call
with an Internal/Inbound Call 328	on Agent
Call Established for Call On Hold 257	Simple Call Model
Call Forwarding (on No Answer) 318	Single-Step Conference
Call Treatment with Routing	Single-Step Transfer
Conference	Single-Step Transfer (Outbound) 271
Conference with Two Incoming Calls	Two-Step Transfer
Using TMergeCalls	(Blind) Complete Before
Connection-Establishing Phase Call Queued to Multiple ACD 236	Consulted Party Answers 280
·	Complete After Consulted
Internal/Inbound Call 230, 233, 240, 247,	Party Answers 277
251, 243	to a Routing Point 288, 283
Outbound Call	Call Treatment with Routing
Hold/Retrieve Function	call-based events
Consulted Party Answers 262, 265	EventCallCreated
Internal Call to Destination	EventCallDataChanged
with DND Activated	EventCallDeleted
Internal/Inbound Call Answerable by	EventReleased (DEPRECATED) 168
Several Agents	general
(Party B Answers)	list
List	Caller Abandonment
basic call models	CallError
handling network calls 228, 227, 226	call-handling & transfer/conference events
monitoring calls	call-handling & transfer/conference events
predictive dialing	EventAbandoned
releasing calls	EventBridged
special cases	EventDestinationBusy
working with queues	EventDialing
Multiple-Queue Call	EventDiverted
Call Removed from Queue 377	EventEstablished
Treated at an IVR port	EventHeld
at IVR Queue 370, 374	EventNetworkReached 47
Mute Transfer	EventPartyAdded
Network Call Flows	EventPartyChanged 50
Alternate Call Service 385, 386	EventPartyDeleted 51
Caller Abandonment 389, 385, 380, 381	EventQueued
Failed Consultation (Specific	EventReleased 57
Target)	EventRetrieved 59
Premature Disconnection (One Variation)	EventRinging
390, 391	list
Reconnection	CallHistory
	event attribute
Single-Step Transfer 390, 379	
Transactional Error	

Genesys Senesys

CallID	in document
event attribute	type styles
CallInfoResp	CustomerID
CallingLineName	event attribute
event attribute	
call-party state	_
call	D
call-narty states	
narty 130	DialOut
call-routing events	DialOutRegistryResp 219
EventRouteRequest	DNIS
EventRouteUsed	event attribute
list	document
	conventions
CallState	errors, commenting on
event attribute	version number 470
CallStatus	DTMF events
call-treatment events	EventDigitsCollected
EventTreatmentApplied	EventDTMFSent
EventTreatmentEnd	list
EventTreatmentNotApplied	1131
EventTreatmentRequired	
list	E
CallType	
event attribute	ErrorCode
Cancel	event attribute
	ErrorMessage
event attribute	event attribute
	ESP
event attribute	server
	Event
CLID	event attribute
	event attributes
CollectedDigits event attribute	AccessNumber
	AgentID
commenting on this document	ANI
Conference	CallHistory
Conference Completion	CallID
Conference with Two Incoming Calls	CallingLineName
Using TMergeCalls	CallState
Connection-Establishing Phase	CallType
Call Queued to Multiple ACD 236	Capabilities
Internal/Inbound Call 230	Cause
Internal/Inbound Call to ACD 233	CLID
Internal/Inbound Call with Call Parking 240	CollectedDigits
Internal/Inbound Call with Routing 247	ConnID
Internal/Inbound Call with	CustomerID
Routing Outbound 251	DNIS
Internal/Inbound Call with Routing	ErrorCode
RouteQueue Case 243	ErrorMessage
Outbound Call	Event
ConnID	extensions
event attribute	FileHandle
Consultation Leg Initiation	HomeLocation
Specific Destination	
URS Selected Destination	
	InfoType
conventions	LastCollectedDigits

Location		EventDestinationBusy	
LocationInfoType		EventDialing	36
NetworkCallID		EventDigitsCollected	
NetworkCallState	150	EventDiverted	44
NetworkDestDN	150	EventDNBackInService	
NetworkDestState	150	EventDNDOff	93
NetworkNodeID	150	EventDNDOn	
NetworkOrigDN	151	EventDNOutOfService	<b>90</b>
NetworkPartyRole		EventDTMFSent	75
NodelD		EventError	34
OtherDN	151	EventEstablished	39
OtherDNRole		EventForwardCancel	
OtherQueue		EventForwardSet	
OtherTrunk		EventHardwareError	33
Place		EventHeld	
PreviousConnID		EventLinkConnected	30
reasons		EventLinkDisconnected	
RefConnID		EventListenDisconnected	
ReferenceID		EventListenReconnected	
Reliability		EventLocationInfo	17
RouteType		EventMailBoxLogin	
Server		EventMailBoxLogout	
ServerRole		EventMessageWaitingOff	
ServerVersion		EventMessageWaitingOn	
SessionID		EventMonitoringCancelled	<b>97</b>
ThirdPartyDN		EventMonitoringNextCall	96
ThirdPartyDNRole		EventMuteOff	<b>)</b> 2
ThirdPartyQueue		EventMuteOn	
ThirdPartyTrunk		EventNetworkCallStatus	31
ThisDN		EventNetworkPrivateInfo	32
ThisDNRole	158	EventNetworkReached	47
ThisQueue	159	EventOffHook	99
ThisTrunk	159	EventOnHook	00
time	159	EventPartyAdded	48
TreatmentType		EventPartyChanged	
userdata		EventPartyDeleted	
WorkMode		EventPartyInfo	15
XReferenceID		EventPrimaryChanged	31
XRouteType		EventPrivateInfo	
EventAbandoned	41	EventQueued	
EventAck	126	EventQueueLogout	34
EventAddressInfo		EventRegistered	
EventAgentAfterCallWork		EventReleased	57
EventAgentIdleReasonSet		EventReleased (DEPRECATED) 16	38
EventAgentLogin		EventRemoteConnectionFailed	25
EventAgentLogout	83	EventRemoteConnectionSuccess	
EventAgentNotReady	86	EventReqGetAccessNumberCanceled 12	25
EventAgentReady		EventResourceAllocated	
EventAgentReserved		EventResourceFreed	
EventAnswerAccessNumber		EventRestoreConnection	
EventAttachedDataChanged		EventRetrieved	
EventBridged		EventRinging	
EventCallCreated		EventRouteRequest	
EventCallDataChanged		EventRouteUsed	36
EventCallDeleted		events	
EventCallInfoChanged	129	agent-status & DN events 81–10	J8

476 Genesys S

call-based events	EventLinkConnected
general 168–170	EventLinkDisconnected
call-handling & transfer/conference	EventServerConnected
events	EventServerDisconnected 29
call-routing events	list
call-treatment events	Generic Telephony State
DTMF events	Continue reliability classes in the second s
general events	
	H
ISCC events	
negative-response events	Hold/Retrieve Function
network attended transfer events 61–64	Consulted Party Answers
query events	Consulted Party Does Not Answer 265
registration events	HomeLocation
special events	event attribute
user data events	CVOIR dittibute
voice-mail events	
EventServerConnected	I
EventServerDisconnected	•
EventServerInfo	InfoStatus
EventSwitchInfo	event attribute
EventTransactionStatus (transaction	InfoType
monitoring)	event attribute
EventTreatmentApplied 68	inherited method
EventTreatmentEnd	interaction
EventTreatmentNotApplied	defined
EventTreatmentRequired	models
EventUnregistered	Internal Call to Destination
EventUserEvent	with DND Activated 316
EventVoiceFileClosed	Internal/Inbound Call Answerable by
EventVoiceFileEndPlay 80	Several Agents
EventVoiceFileOpened	(Party B Answers)
extensions	ISCC events
event attribute	EventAnswerAccessNumber 123
unstructured data 201	EventRemoteConnectionFailed 125
Extensions in	EventRemoteConnectionSuccess 124
TInitiateConference, TInitiateTransfer, and	EventReqAccessNumberCanceled 125
TMuteTransfer	list
TMakePredictiveCall	ISCC Transaction Monitoring 181
External Services Protocol	italics
See ESP	italics
See ESF	
	J
F	
	joint method
Failed Consultation	joint mounds
Specific Target	
URS Selected Destination	L
FileHandle	_
	LastCollectedDigits
event attribute	event attribute
font styles	Location
italic	event attribute
monospace 471	LocationInfoType
	event attribute
<b>C</b>	LoginResp
G	Logiiii (eap
ganaral avents	
general events	

M	Reconnection (Implicit by Network
on and also we attails use	T-Server)
mandatory attribute 24	Reconnection (Implicit by SCP) 388
messages	Single-Step Transfer
AccessNumResp	Standard Network Call Initiation 379
Agent Subtype	Transactional Error
CallError	Transfer Completion (Implicit) 384
CallInfoResp	Transfer/Conference Completion
CallStatus	(Explicit)
Cancel	Network Single-Step Transfer
DialOut	Network T-Server Call Flows 379
DialOutRegistryResp	NetworkCallID
LoginResp	event attribute
MonitorInfo	NetworkCallState
Port Subtype	event attribute
RouteResponse	NetworkDestDN
Server Subtype	event attribute
StatResp	NetworkDestState
TreatCall	event attribute
UDataResp	NetworkNodeID
MonitorInfo	event attribute
monospace font	NetworkOrigDN
Multimedia Reporting Protocol 19	event attribute
Multiple-Queue Call	NetworkPartyRole
Call Removed from Queue 377	event attribute
Treated at an IVR port	NodeID
Direct Treatment at IVR 374	event attribute
Treated at an IVR port	
at IVR Queue	•
Mute Transfer	0
	Open Media Platform SDK 446
N	optional attribute
14	OtherDN
negative-response events 134–135	event attribute
EventError	OtherDNRole
list	event attribute
network attended transfer events61–64	OtherQueue
EventNetworkCallStatus 61	event attribute
EventNetworkPrivateInfo 62	OtherTrunk
Network Call Flows	event attribute
Alternate Call Service	Outbound Call to a Busy Destination 310
Alternate Call Service with Transfer	Outpour to a basy bestination 510
Completion	
Caller Abandonment	P
Conference Completion	_
Consultation Leg Initiation (Specific	participant
Destination)	party
Consultation Leg Initiation (URS Selected	call-party states
Destination)	persistent reasons
Failed Consultation (Specific Target) 381	Place
Failed Consultation (URS Selected	event attribute
Destination)	Port Subtype
Premature Disconnection (One Variation). 390	Predictive Call
Premature Disconnection 2 391	Predictive Call (Connected to a Device
Reconnection	Specified in Extensions) 352
Reconnection (Explicit) 388	Premature Disconnection
CARCALITIC CARCILLA ACCIDANTA	

478 Genesys S

A Second Variation	ServerRole
One Variation	event attribute
PreviousConnID	ServerVersion
event attribute	event attribute
protocol	Service Observing
protocom	for Agent-Initiated Call
	on Agent
Q	on Queue
query events	SessionID
EventAddressInfo	event attribute
EventLocationInfo	Simple Call Model
EventPartyInfo	Single-Step Conference
EventServerInfo	Single-Step Transfer
EventSwitchInfo	Single-Step Transfer (Outbound) 271
	snapshot
list	defined
	special events
В	EventAck
R	EventAgentReserved
raccana	EventCallInfoChanged
reasons	EventHardwareError
event attribute	
unstructured data	EventPrimaryChanged
Reconnect-Call Service	EventPrivateInfo
Reconnection	EventResourceAllocated
Reconnection (Explicit)	EventResourceFreed
Reconnection (Implicit by Network	EventRestoreConnection
T-Server)	EventUserEvent
Reconnection (Implicit by SCP)	list
Redirect-Call Service	square brackets 471
RefConnID	Standard Network Call Initiation 379
event attribute	StatResp
	structures
ReferenceID	
event attribute	TEvent
registration events	Supplementary State
EventRegistered	
EventUnregistered	Т
list	1
Rejected Call	TEvent
Route Point	structure
Release from Conference	
Release Phase	third-party server
Reliability	ThirdPartyDN
event attribute	event attribute
reliability	ThirdPartyDNRole
RouteResponse	event attribute
	ThirdPartyQueue
RouteType	event attribute
event attribute	ThirdPartyTrunk
Routing / Treatment State	event attribute
	ThisDN
	event attribute
S	ThisDNRole
agranta mathad	
separate method	event attribute
Server	ThisQueue
event attribute	event attribute
Server Subtype	ThisTrunk
	event attribute

time	V
event attribute	
TInitiateConference, TInitiateTransfer, and	version numbering, document 470
TMuteTransfer	voice-mail events
Extensions in	EventMailBoxLogin
T-Library events	EventMailBoxLogout
list	EventVoiceFileClosed
TMakePredictiveCall	EventVoiceFileEndPlay
Extensions in	EventVoiceFileOpened
Transaction Monitoring	list
elements	
enumeration	W
TSubscriptionOperationType 182	••
events	WorkMode
EventTransactionStatus	event attribute
function call	
TTransactionMonitoring	v
subscription rules	X
Transactional Error	XReferenceID
transactions	event attribute
Transfer Completion	XRouteType
Implicit	event attribute
Transfer/Conference Completion	event attribute
Explicit	
Treatment Type	
TreatmentType event attribute	
TSubscriptionOperationType	
TransactionMonitoring	
Two-Step Transfer	
(Blind) Complete Before	
Consulted Party Answers 280	
Complete After Consulted	
Party Answers 277	
to a Routing Point	
to ACD	
type	
as attribute	
type styles	
conventions	
italic	
monospace	
typographical styles 470, 471	
U	
UDataResp	
unstructured data	
extensions	
reasons	
user data	
userdata event attribute	
user data events	
EventAttachedDataChanged 121	
list	

Genesys **S** 480