



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.

Quick Start Guide

Working with the Playground Application

12/17/2025

Working with the Playground Application

Contents

- 1 Working with the Playground Application
 - 1.1 PlayGround
 - 1.2 Change instrumentation script
 - 1.3 Reactive engagement
 - 1.4 Proactive engagement
 - 1.5 User Identification
 - 1.6 System events

The Playground application website features a header block and four other functional blocks that can all be collapsed with a click. You can use the links and buttons in these blocks to trigger chat, business rules, and business events.

[English](#) | [Francais](#)

PlayGround

Start page

[Change instrumentation script ?≡](#)

[Widgets customisation ?≡](#)

Reactive engagement

[Get pacing state for chat](#) ?≡

[Chat with pacing](#) **true** ?≡

[Chat without pacing](#) ?≡

System events

[Page Entered](#) ?≡

[Page Exited](#) ?≡


Proactive engagement

Singleton	Engage!
Timeout 30	Engage!
Sequence	Click here first → Click here to En
Sequence Ads	Click here first → Click here to Ad
Set	Click ↔ Click
Counter (3)	Count to Engage
Simple search	proactive engagement Search
Search with category	What is Search

The Playground application.

PlayGround


The **PlayGround** header block displays the current page name (**Start page** in the image above) and links to the Read Me file for the application.

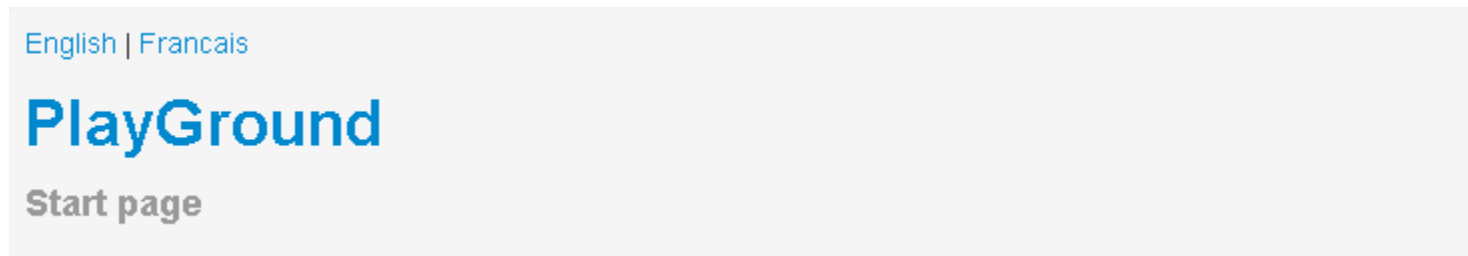

The **PlayGround** header block.

Change instrumentation script

The **Change instrumentation script** block allows you to configure the instrumentation script on the fly. For details about configuring the script, see [Configuring the Instrumentation Script](#).



The **Change instrumentation script** block.

Reactive engagement

The **Reactive engagement** block allows you to initiate chat interactions with an agent simply by clicking a link.



The **Reactive engagement** block.

The block contains three links that demonstrate reactive chat, with and without the pacing algorithm.

- Get pacing state for chat — Displays `true` if the pacing algorithm allows reactive chat and `false` if the pacing algorithm doesn't allow reactive chat. See [Configuring the Pacing Algorithm](#) for details.
- Chat with pacing — Opens a registration form for a chat if the pacing algorithm allows reactive chat.
- Chat without pacing — Opens a registration form for a chat, regardless of whether the pacing algorithm allows reactive chat.

You can modify the code for each of the actions by clicking the related view code button , making your changes, and then clicking **Save**.

Proactive engagement

Proactive engagement

Singleton	Engage!		
Timeout 30	Engage!		
Sequence	Click here first → Click here to Engage		
Sequence Ads	Click here first → Click here to Ads		
Set	Click	↔	Click
Counter (3)	Count to Engage		
Simple search	proactive engagement	Search	
Search with category	What is	Search	

The **Proactive engagement** block.

The **Proactive engagement** block contains a set of links that trigger business rules. Clicking one of these links changes the address of the page, the page title, and the name of the page in the **PlayGround** header block. In this way, the application simulates a functioning multi-page website.

To trigger business rules, the following conditions must be true:

- All system components must work. See Step 7 in [Installing Genesys Web Engagement](#) for component information.
- The website must have a properly configured instrumentation script in the **Change instrumentation script** block.
- All resources from the instrumentation script should be available.
- There are available agents for the selected media channel.

- The invitation limit (3 by default) should not be exhausted. The invitation limit is set in the Engagement strategy for the application. See [Engagement Policy \(Decision Workflow\)](#) for details.

Here is a summary of events when you trigger a business rule:

- The application displays the engagement invitation. You can accept, reject, or ignore the invite.
- If you ignore, the invitation disappears. If you reject, the invitation closes.
- If you accept and are logged in (see the **User Identification** block for details), the application does not display the registration form and you begin the chat session.
- If you accept and are not authorized, the application displays the registration form. If you complete the registration form, the information is passed on to the agent in Interaction Workspace. If you do not complete the registration form, you communicate with the agent as an anonymous user.


The Proactive block lets you try out different business rules based on the default rule templates included with Genesys Web Engagement. See [Creating Business Information](#) for details about rule templates and [Deploying a Rules Package](#) for more information about rules.

Business Rule	Description
Singleton	Entrance to the page is specified in the PlayGround-Singleton category. Category: PlayGround-Singleton
Timeout 30	Entrance to the page is specified in the PlayGround-Timeout30 category. A business rule is triggered after a 30-second delay. Category: PlayGround-Timeout30
Sequence	Serial input to the first page First , then on page Second . The sequence may be any length. For example, this could be extended to check if all the necessary pages of a Wizard have been successfully completed. Categories: PlayGround-Seq-First and PlayGround-Seq-Second
Sequence Ads	Serial input to the first page AdvertisementOne , then on page AdvertisementTwo . The sequence may be any length. For example, this could be used to display advertisements. Note that Advertisement sequence does not passed through the Orchestration server and instead sends notification directly to the browser. Categories: PlayGround-Ads-First and PlayGround-Ads-Second
Set	Bypassing pages set in any order. The user can go to PageA, then on to PageB, or vice versa.
Counter (3)	Counts multiple entries on the same page. Category: Playground-Counter
Simple search	Search for a specific keyword. The keyword is hard-

Business Rule	Description
	coded in the business rule.
Search with category	Search for a specific keyword. The keyword is defined by the PlayGround-Search category. A regular expression can be used to describe the keyword. Category: PlayGround-Search

User Identification

The **User Identification** block contains links to send events that are generated by the **Monitoring API**. All events in this block can be modified by clicking the related view code button  and then **Save**. You can use the user information to manage registration (from the registration form for the authorized user) and send the necessary information to the agent.

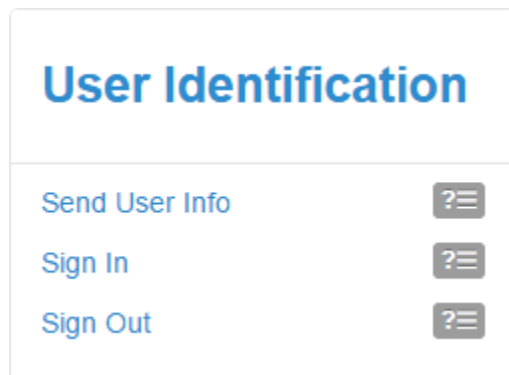


The **User Identification** block.

This block demonstrates three generated events:

- **Send User Info**—Send events with user information. You can use this event to identify an authorized user who has previously visited the site.
- **Sign In**—Send the authorized user login event.
- **Sign Out**—Send the authorized user log out event.

System events

The **System events** block contains links that demonstrate the **PageEntered** and **PageExited** system events that are part of the **Monitoring JS API**. You can modify the code for each of the actions by clicking the related view code button , making your changes, and then clicking **Save**.

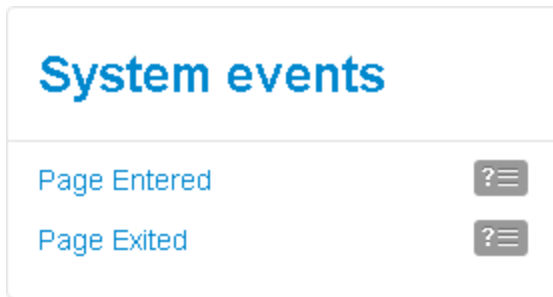

The **System events** block.

Important: The **PageEntered** event updates the current **pageID**. Make sure that a **PageExited** event is sent before sending a **PageEntered** event, as it is important for correctly modeling the actions of a Single Page Application.