



This PDF is generated from authoritative online content, and is provided for convenience only. This PDF cannot be used for legal purposes. For authoritative understanding of what is and is not supported, always use the online content. To copy code samples, always use the online content.


# Stat Server User's Guide

Timestamps

5/10/2025

# Timestamps

Prior to Stat Server release 8.0, Stat Server relied on UTC time measured locally to timestamp events that were received from data sources (such as T-Server) and to update time-sensitive statistics. In practice, this local time could deviate significantly from the data source's UTC time which reflected the moment of event transmission.

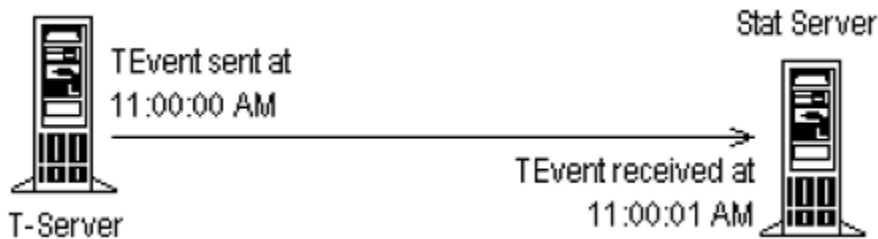

Timestamp of the TEvent

Network latencies and load-related delays explain the gap between these two timestamps and largely account for the discrepancies in statistical values reported by other Genesys Reporting applications for comparable statistics.

The setting of the `UseSourceTimeStamps` stat type configuration option (described in the [Stat Type Configuration Options](#) table) enables you to control which timestamp Stat Server uses; however, it should be noted that this aspect of time alone does not cause all of the differences in reported statistical values. Stat Server uses a mix of local and source timestamps to compute the duration of a terminating action for any statistic.

**For example**, Stat Server adjusts all actions occurring for a statistic to the local time in which the statistic was opened. But when the actions terminate, their timestamps and, therefore their durations, are measured in:

- Local time, when `UseSourceTimeStamps` has been set to No.
- Both local and source time, when `UseSourceTimeStamps` has been set to Yes. Stat Server adjusts action duration in this scenario as follows:  
$$\text{action\_end} - \max(\text{action\_start}, \text{statistic\_creation\_local\_timestamp})$$
  
where `action_end` is measured in source time for the given statistic.

## Source Timestamp Algorithm

Starting with release 8.0, Stat Server maintains the following two new attributes internally for all actions and object relationships:

- Source start—derived from the `Time` attribute of TEvents, the `event_time` attribute of Interaction Server events, and the `cfgTimestamp` attribute of Configuration Server events.
- Source end—derived in the same manner as Source start.

Stat Server attributes these to each action regardless of the setting of the `UseSourceTimeStamps` option. When `UseSourceTimeStamps` is set to `true`, Stat Server references the values of these attributes to calculate statistic duration.


### Important

The values that Stat Server writes to the Stat Server database do not reflect source timestamps.

Figure below illustrates how Stat Server computes the duration of a `CallInbound` action on an agent group when `UseSourceTimeStamps=true`. Note that Stat Server uses seconds-level precision, truncating milliseconds before computing duration.

- Action source start = maximum value among:
  - T-Server timestamp of agent's login
  - Configuration Server timestamp when the agent was added to the group.
  - T-Server timestamp associated with `EventEstablished` for the call.
- Action source end = minimum value among:
  - T-Server timestamp of agent logout
  - Configuration Server timestamp when the agent was removed from the group.
  - T-Server timestamp associated with `EventReleased` for the call.

Note that Stat Server references the timestamps from at least two sources to determine duration.

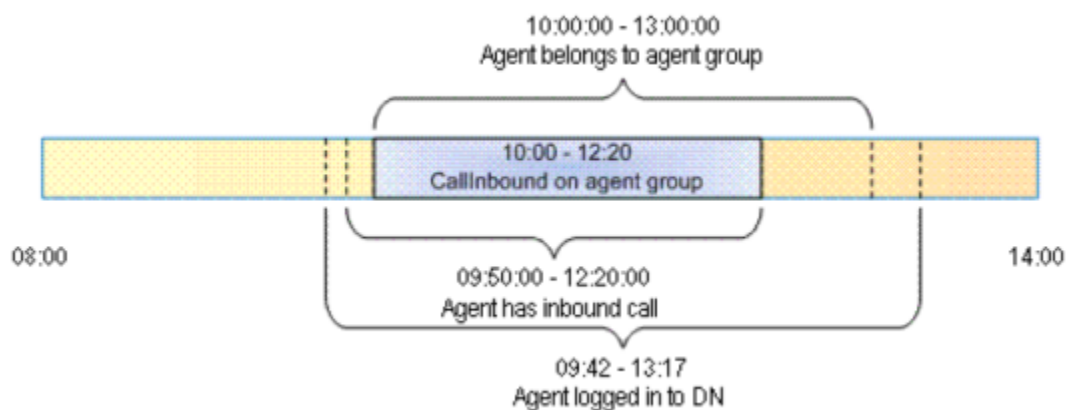

#### How Stat Server Computes CallInbound Example

The following special circumstances require Stat Server to reference both the source and local timestamps for action generation when `UseSourceTimeStamps` is set to `true`:

- When Stat Server generates actions while reading initial configuration. Stat Server reads configuration data in synchronous mode, so Stat Server sets `Source start` to the value of the local timestamp.
- When actions terminate while the connection to the event-supplying server is lost. Corresponding

events do not contain the source timestamp, so Stat Server references its local timestamp to compute action duration.

For example, T-Library detects that the connection with T-Server is lost and generates `EventServerDisconnected`.

- When statistics use internal timestamps. These internal timestamps might be set to local timestamps as in the case of initial value calculations and resets. For an example of how Stat Server references both local and source time, see example at the top of the page.